


13. Install blackout tape as shown in pic (9).
Start from the edge of the RR bumper seal as shown in pic (9).


14. Install spring nut at position G & H as shown in pic (9).

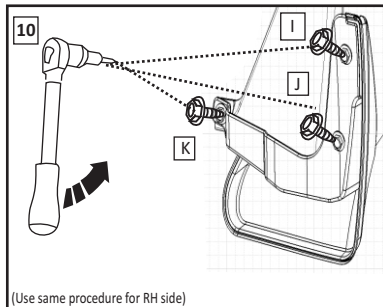

15. Install RR Mudguard with Grommet screw in position I, J & K as shown in pic (10)

Notice

1. When Installing, tighten the screws in the order indicated in picture.
2. During installation, use socket head to slightly tighten the upper and lower screws. After securely tightening the middle screw, adjust and fully tighten the other two screws.
3. Do not apply excessive force when tightening screws.

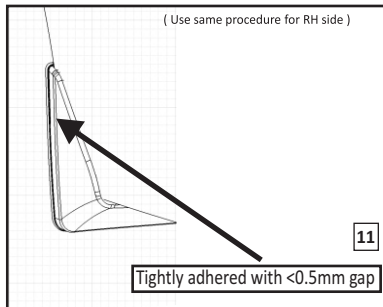

Caution

Please use Socket Head to Tighten the Screws

16. Check the gap and tighten the screw firmly to ensure gap <0.5mm between mudguard and bumper as shown in picture (11).

17. For installation of RR Mudguard RH follow step 5 to 17.


Thank You

" MUD GUARD " INSTALLATION MANUAL

Thank for purchasing the TOYOTA genuine " Mudguard ".This manual explains the procedure for installing the " Mudguard ".Please read the manual before installation to ensure correct installation.

Part No.	Applicable Model
PZ044-12601	COROLLA

Components Parts

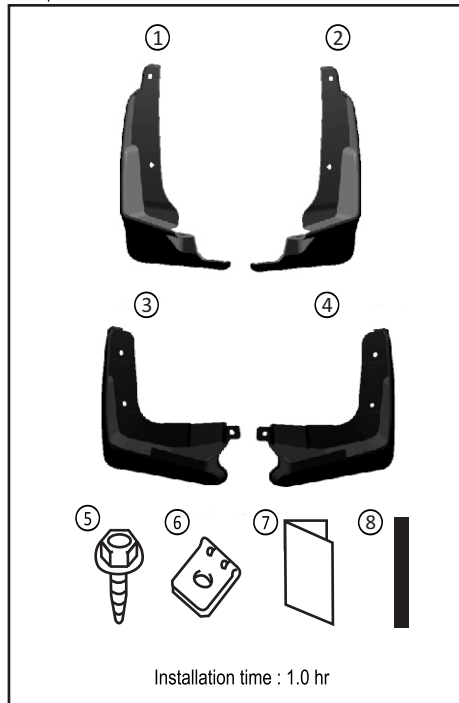

SL.NO	PART NAME	QTY
1	FR Mudguard ,LH	1
2	FR Mudguard ,RH	1
3	RR Mudguard ,LH	1
4	RR Mudguard ,RH	1
5	Grommet screw	12
6	Spring nut	4
7	Installation manual	1
8	Blackout tape	2

Installation Tools


1. Clean Cloth
2. White Gasoline or Alcohol
3. Drill bits $\phi 4, \phi 7\text{mm}$
4. Electric Drilling Machine
5. Socket Head
6. Clip Remover
7. Masking Tape

CAUTIONS FOR INSTALLATION


1. Use clean cloth for cleaning assembly area.
2. Check all component and tooling before installation.
3. Study manual and caution prior to install. Mis-installation may cause damage.

INSTALLATION METHOD

Install FR Mud Guard

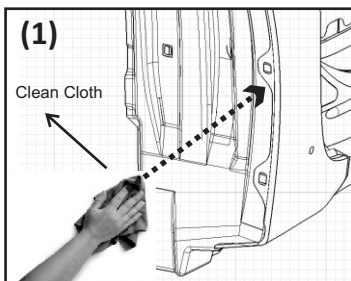

1. Before installing, use cloth dipped with alcohol or white gasoline to clean the vehicle installation surface. Installation procedure is as following

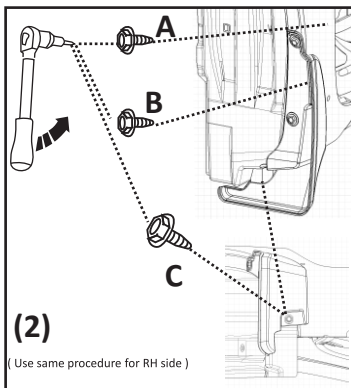


2. Install the Mud Guard with grommet screw in position as shown in the picture in position A, B, C.

Notice

1. When installing, tighten the screws in the order indicated in picture.
2. During installation, use socket head to slightly tighten the upper and lower screws. After securely tightening the middle screw, adjust and fully tighten the other two screws.
3. Do not apply excessive force when tightening screws.

Caution

Please use Socket Head to Tighten the Screws at Position A, B, C as in picture.

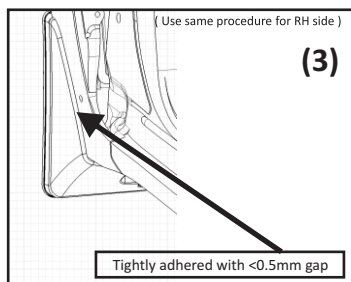

3. Check the gap and tighten the screw firmly ensure gap < 0.5mm between mud guard and fender panel as show in the picture.


4. For Installation of FR Mud Guard RH follow step 1 to 3.





TOYOTA KIRLOSKAR MOTOR PRIVATE LIMITED

Page-2 of 4

Install Rear Mud Guard


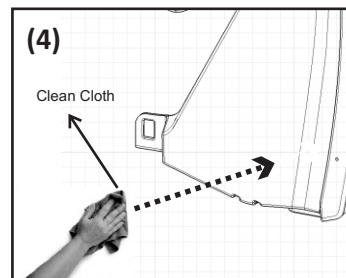


5. Before installing, use cloth dipped with alcohol or white gasoline to clean the vehicle installation surface. Installation procedure is as following

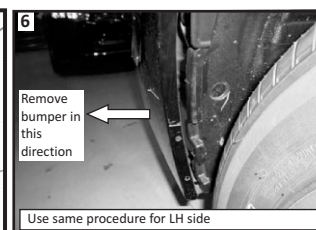

6. Remove clips D & E as shown in pic (5) using clip remover.
7. Remove the screw F as shown in pic (5) using socket head

8. Remove RR Bumper in direction as shown in pic (6)

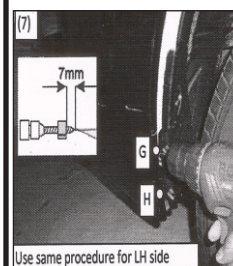


9. Mask the drill bit with the masking tape refer to picture (7). Recommended drilling depth 7mm

10. Drill the hole on the marking already (as picture No. 7a) provided in bumper at position G & H

Drilling procedure :

Initial drill the hole by $\varnothing 4$ mm drill bit & then use $\varnothing 7$ mm drill bit for drilling.

11. Install clips D & E as shown in pic (8).
12. Install the screw F as shown in pic (8) using socket head.

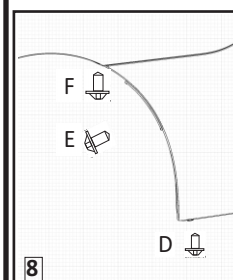

TOYOTA KIRLOSKAR MOTOR PRIVATE LIMITED

Page-3 of 4