

Installation Guide

Front Control Arm - Rear Bushing

Suggested Install Method:

- Raise vehicle evenly and safely support.



Never rely on a Jack only

- Start by removing the front wheels.
- Proceed to completely remove both front control arms. Refer basic drawing below.
- Pull the bracket and old bushing off the control arm using a vice and twisting method.
- Clean up the spindle of control arm.
- Press or cut out the old bushing from the OE bracket. Remove the old bushing steel shell.
- Press new bushing **4263** into the clean housing. Refer RH image.
- Grease bushing internal diameter with supplied grease only.
- Push bushing onto clean spindle. Re-fit arm to vehicle using original bolts.

Application - Honda Jazz 2008-14
- Honda City 2008-14

(Always refer current catalogue listings)

Contents - Bushing 4263 x2
- Grease

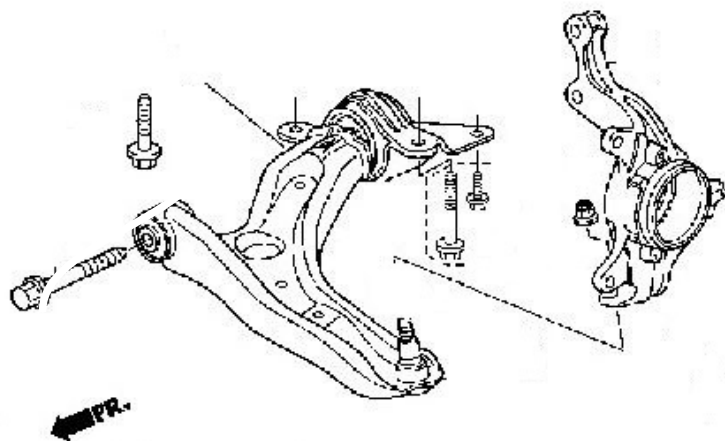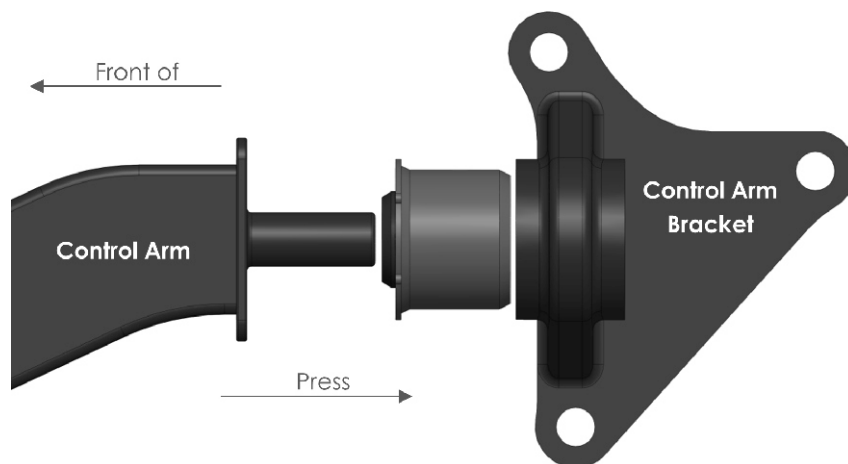

- A wheel alignment soon after install is recommended to correct and Toe change.
- Re-check all bolts after 500kms

It is recommended that a licenced workshop or tradesperson carry out the above procedure and that workshop manual and relevant safety procedures are followed in addition to the above.