


## R-LMJL-01 JL LOADMAX

PN	DESCRIPTION	QTY
1	JL MOUNT BAR	2
2	JL MOUNT BAR END CAP	4
3	JL REAR BRACKET L	1
4	JL REAR BRACKET R	1
5	JL BRACE BRACKET	2
6	JL FRONT BRACKET	2
7	JL SHIM	12
8	M8 x 20mm CAP SCREW	4
9	M8 x 25mm WASHER	8
10	M8 x 100mm CAP SCREW	4
11	M6 x 30mm CAP SCREW	12
12	M6 WASHER	12
13	M6 x 1/2 x 1 x 16G WASHER	8
14	M6 NYLOC NUT	8
15	BUTYL PATC H	12
16	M6 CAGE NUTS	4
17	M8 CAGE NUTS	4
18	ANTI ABRASION TAPE	1

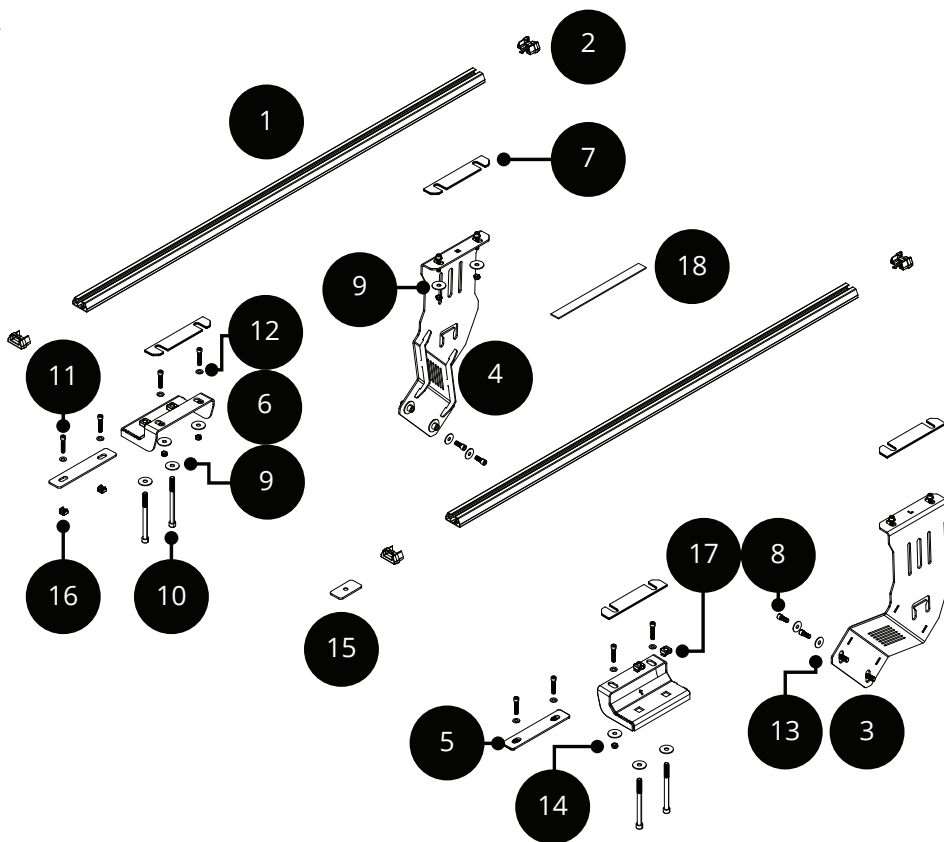



Fitment time: **120-180min**  
Suitable for **Jeep Wrangler JL**

Hardware	Torque setting
M6	12Nm ±2
M8	20Nm ±2

### Tools required




- 5mm hex wrench
- 6mm hex wrench
- Marker
- Ladder
- Ratchet
- 10mm socket
- 13mm socket
- T27 Torx
- 2mm bit
- 6.5mm bit
- Drill

**5 YEARS WARRANTY** For full warranty details refer to the website: [www.rola.com.au](http://www.rola.com.au)

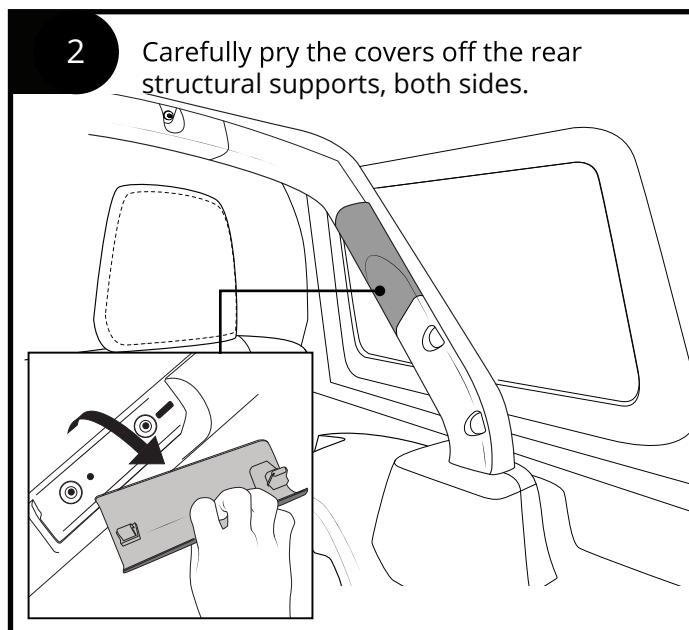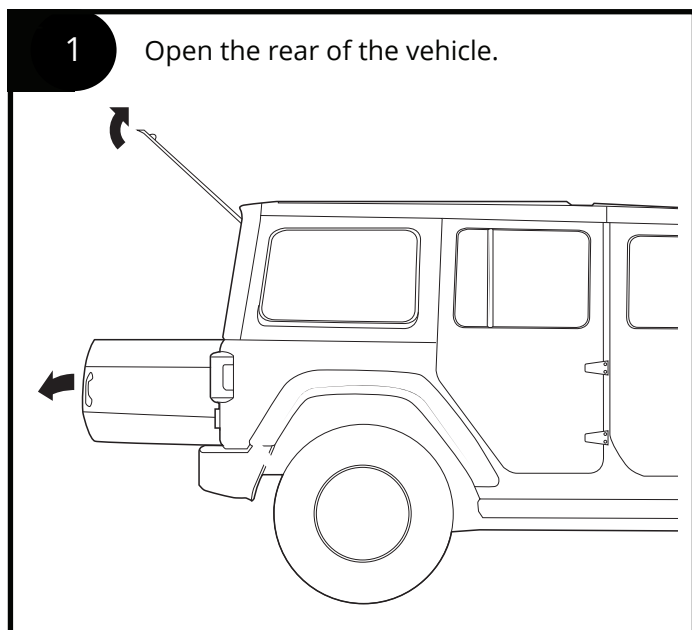


3

Remove the forward cover panels on the underside of the roll cage. These are secured with 5 torx screws, with 3 on the bottom and 2 accessible from on top.

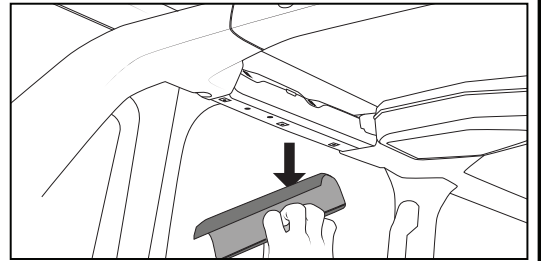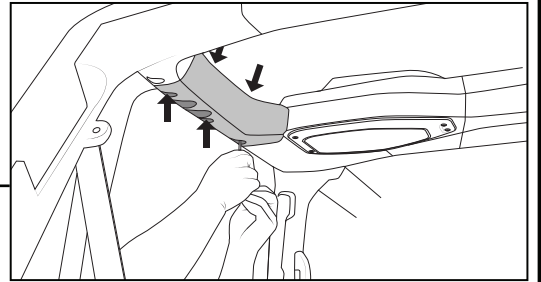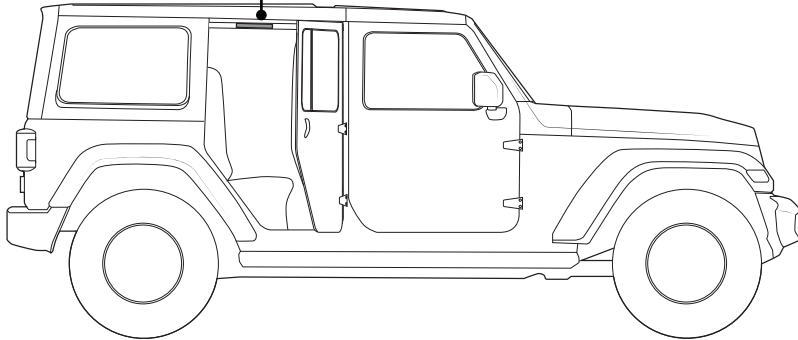


4

Install the rear brackets using M8 x 20mm screws and flat washers. Finger tighten.

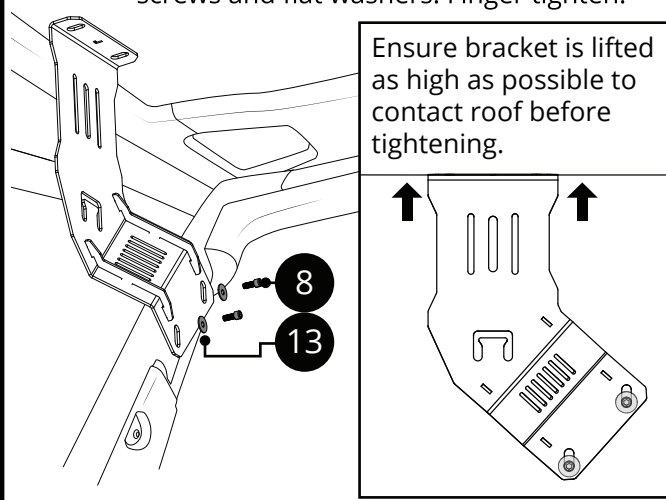



5

Install M8 cage nuts into front brackets.

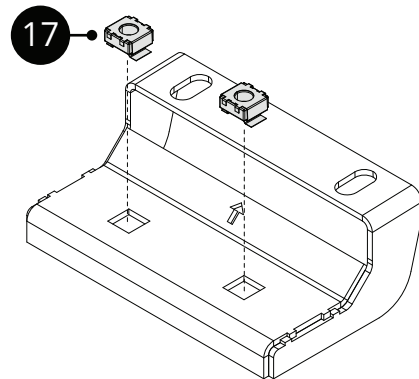


6

Put the front bracket into position. The high side of the bracket faces the interior of the vehicle.

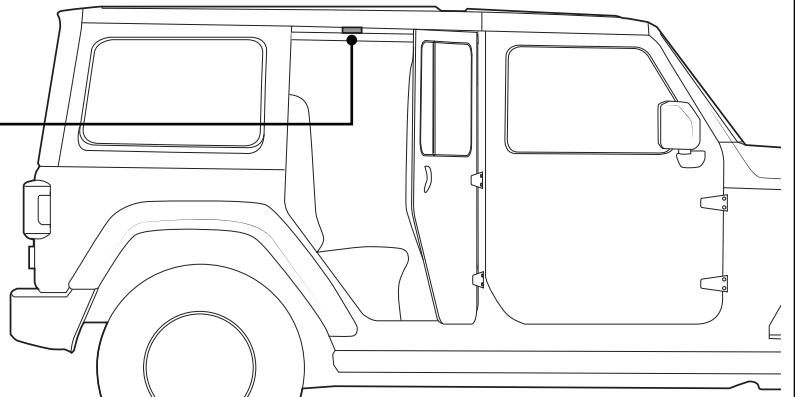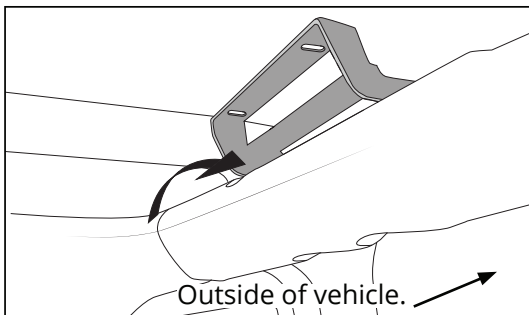


7

Install the bracket with M8 x 100mm screws and M8 x 25mm washers. While applying downward pressure, finger tighten to fix in place.

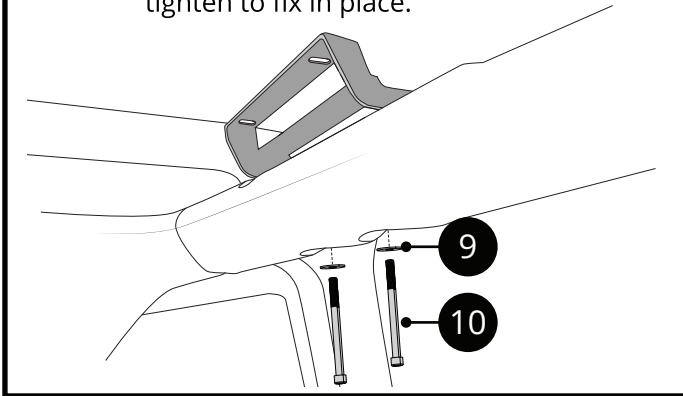


8

If fitted with roof insulation, trace around front and rear brackets, remove the velcro attached insulation, cut traced markings and reinstall insulation.

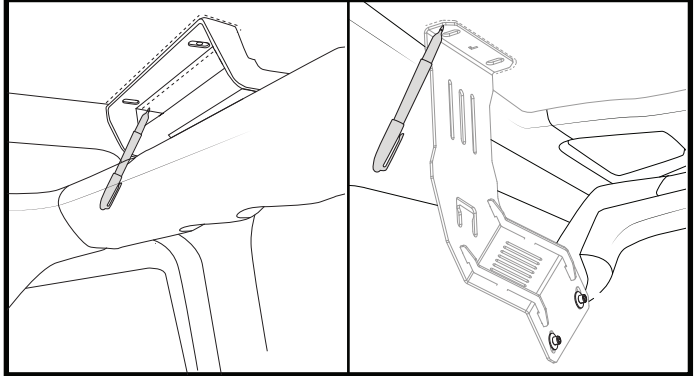


9

Using a marker, create references on the roof through the mount holes in the front brackets.

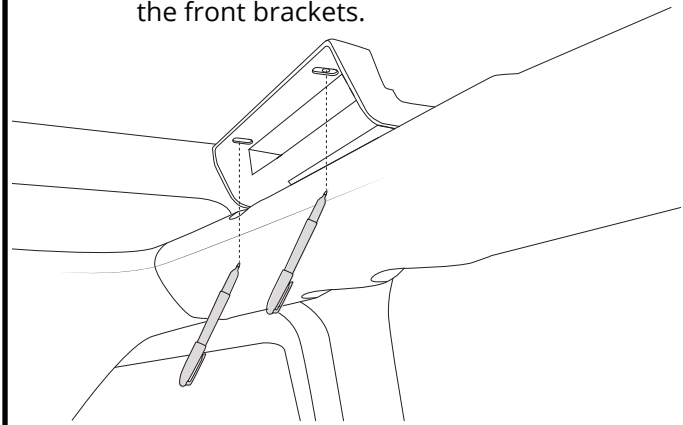


10

Using a marker, create references on the roof through the mount holes in the rear brackets.

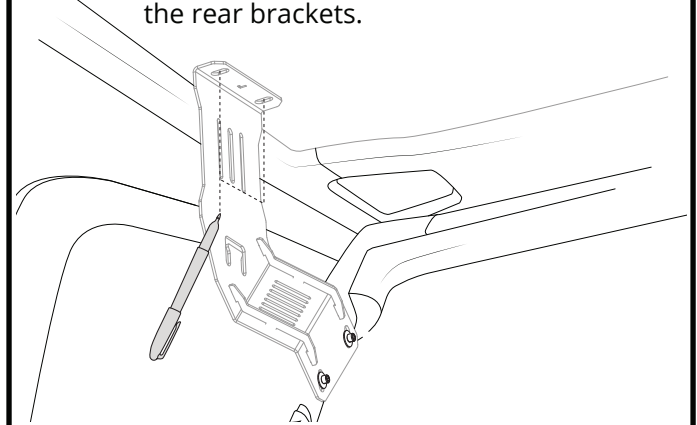


11

Remove the brackets and pilot hole the references made with a 2mm bit, for both front and back brackets.

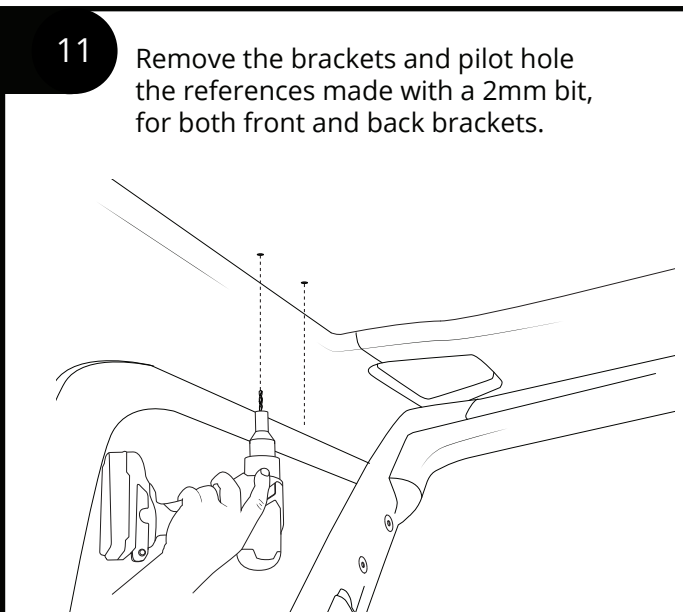


12


Place the mount bar onto the roof on the vehicle. Ensure the drilled holes align with the last 4 slots in the bars. The mount bar should follow the side of the outer roof retail as shown. Ensure mount bars are evenly spaced.

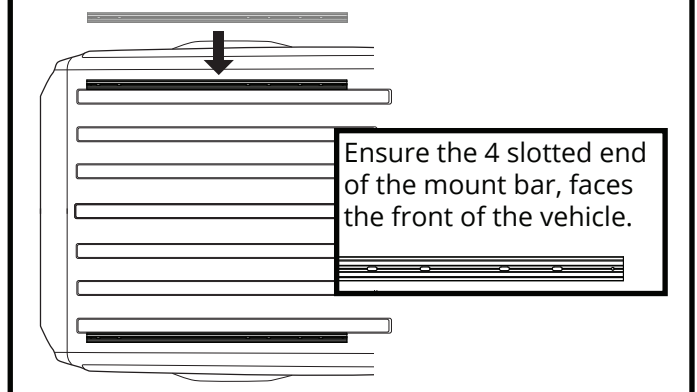


13 With the mount bar in place, mark the front two mounting holes.

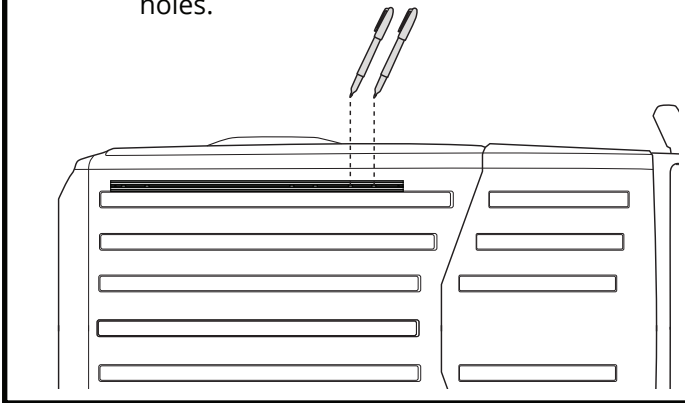

14 Remove the mount bar and pilot drill these references. If insulation is present, drill through it.

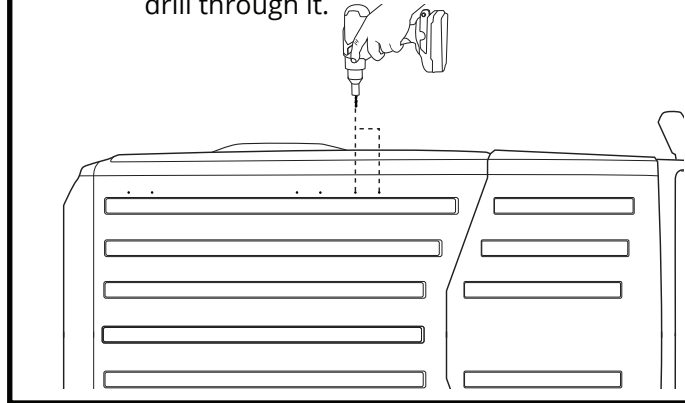




15 Drill out pilot holes with a 6.5mm drill bit.

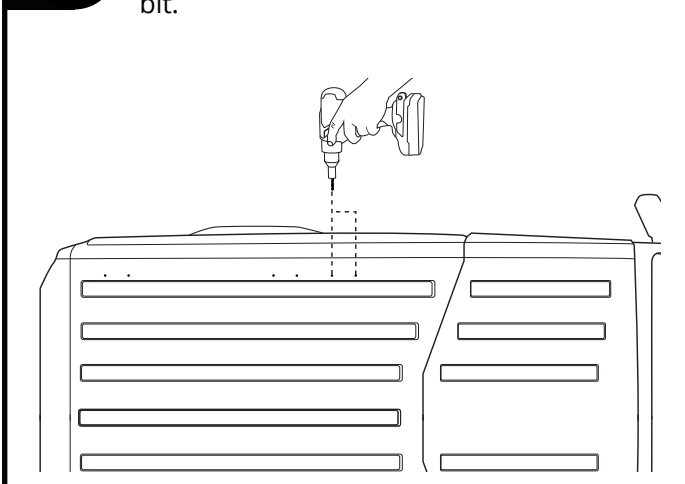



16 Vacuum and clean any material from the roof caused by drilling.




17 Refit the forward cover panels on the underside of the roll cage. These are secured with 5 torx screws, with 3 on the bottom and 2 accessible from on top.

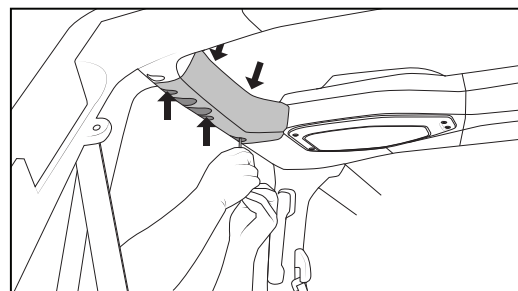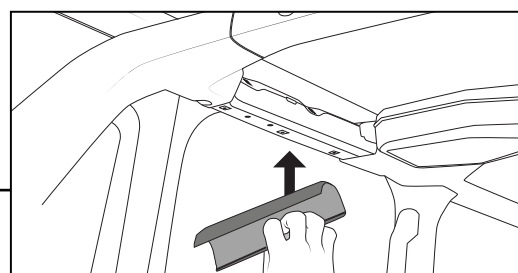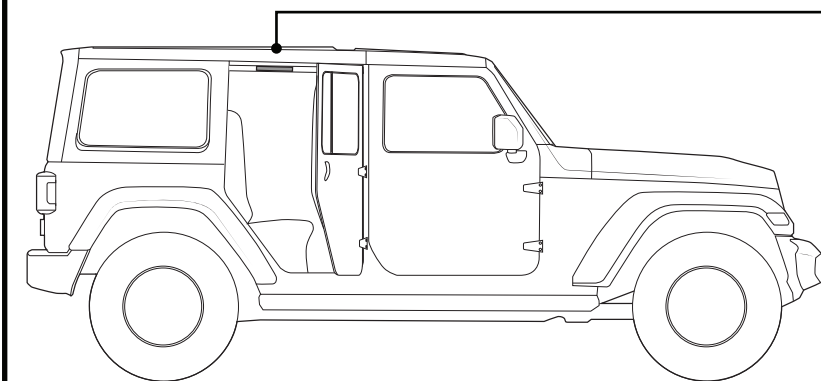


**18** Refit both front and rear brackets. Finger tighten only.

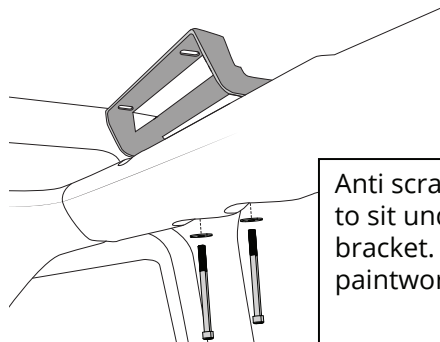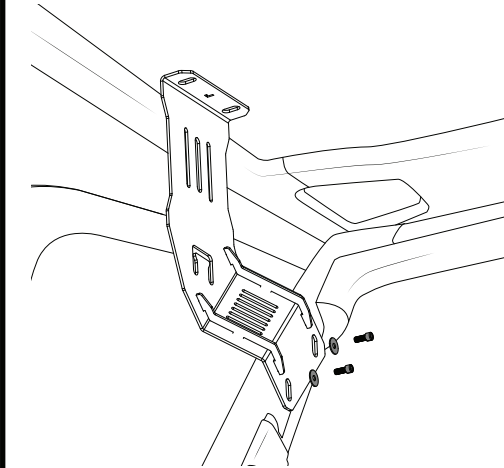


Anti scratch tape can be applied to sit underneath the front bracket. This will protect the paintwork.

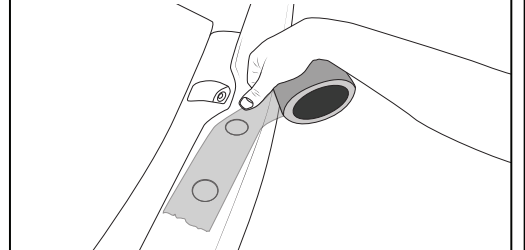

**19** Place butyl patches over holes drilling in the roof (outside of vehicle).

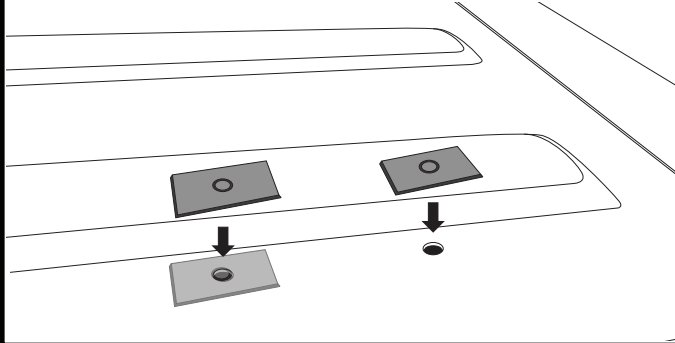


**20** Place the mount bars back onto the roof.

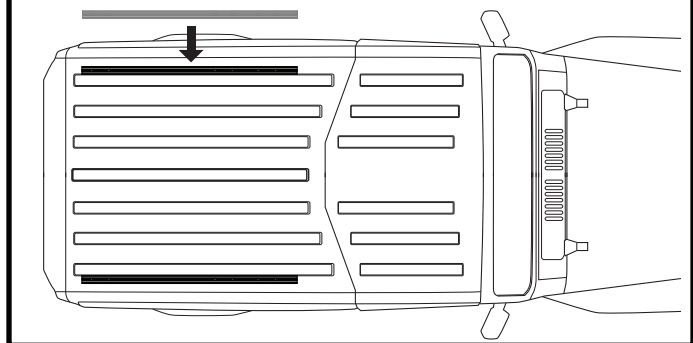


**21** Place the mount bar over the drilled holes, using M6x30mm screws and small M6 washers as fasteners and align with the front and rear bracket inside the vehicle. Secure using wide washers and nylocs from the interior. Ensure all fasteners are torqued before use.

Brace bracket is fixed to the ceiling of the vehicle. Bracket sits on top of insulation if present.

Install cage nuts.

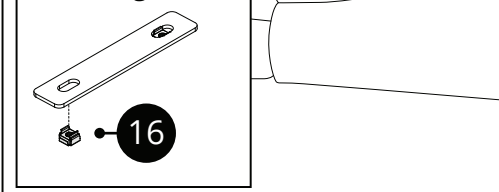

**16**

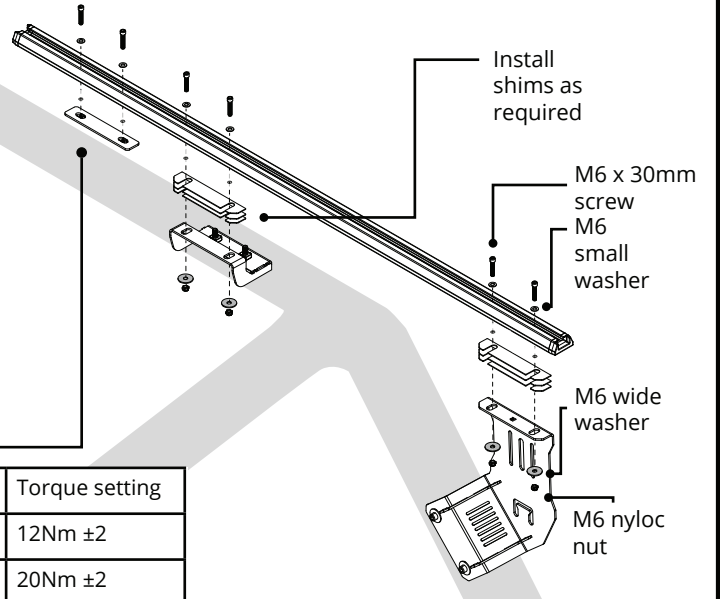

Install shims as required

M6 x 30mm screw  
M6 small washer




M6 wide washer

M6 nyloc nut

Hardware	Torque setting
M6	12Nm ±2
M8	20Nm ±2

22

Attach Ridge Mount & Tray Kit, Low Mount & Tray Kit or Crossbar Kit per corresponding instructions.

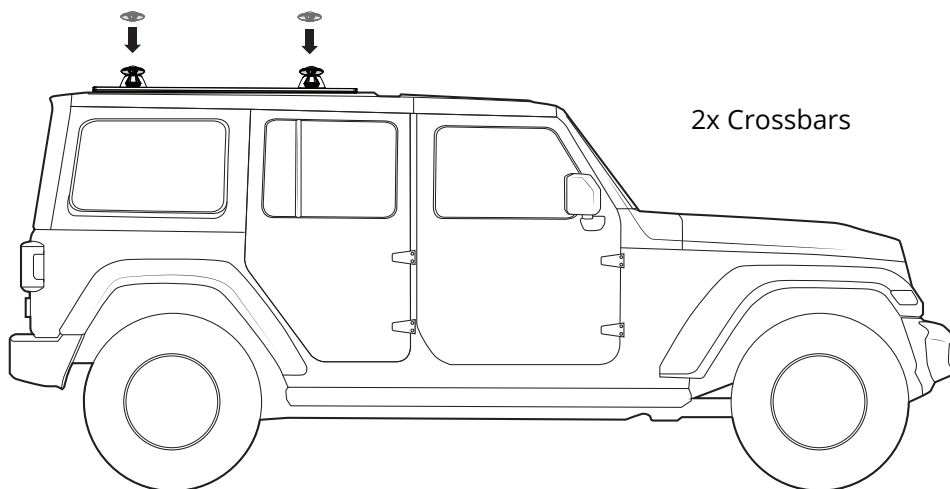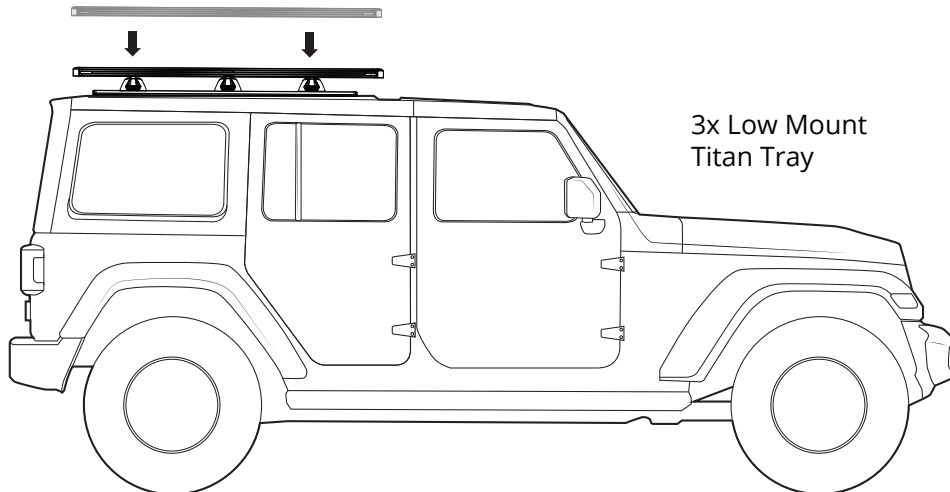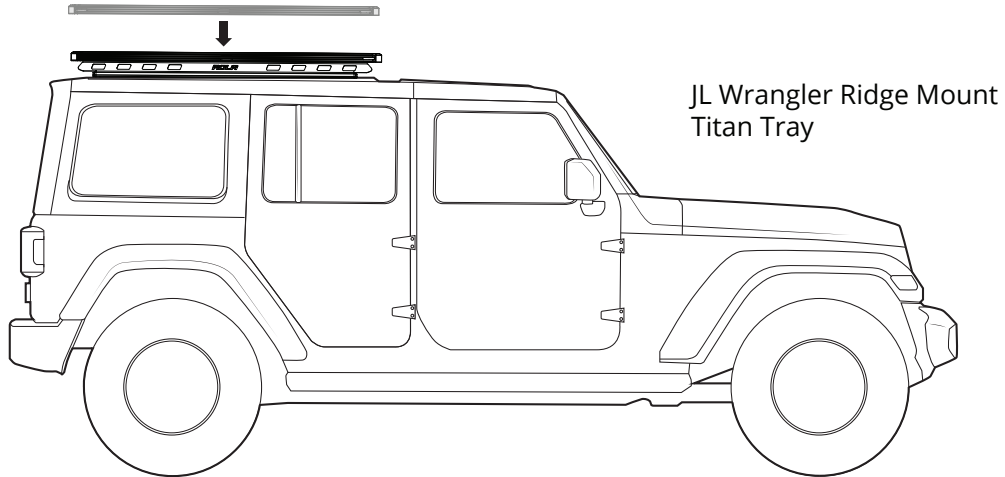

## IMPORTANT - READ BEFORE USE

Please ensure the system is fitted in accordance with the fitting instructions. It is important that you observe all outlined below.



## WARRANTY INFORMATION

Rola warrants that, subject to exclusions and limitations below, the system will be free from defects in materials and workmanship for a period of 5 years commencing on the date of sale by the authorized Rola stockist to the original purchaser of the system.

If a defect appears in the system before the end of the warranty period and Rola finds that the defect is in materials or workmanship, Rola will, in its sole discretion, either:

1. Repair the system or the defective component of the system free of charge
2. Replace the system or the defective component of the system; or
3. Refund the purchase price of the system to the original purchaser.

Rola reserves the right to change the design, specifications or composition of the system without notice and without liability.

Rola reserves the right to replace defective products or components with products or components of similar quality, grade and composition, where an identical product or component is not available. Goods presented for repair may be replaced by refurbished goods of the same type rather than being repaired. Refurbished parts may be used to repair the goods. The 2 year warranty does not apply where:

1. The system is not installed in compliance with the fitting instructions provided
2. The system is not used as intended or designed
3. The system has been on-sold or assigned by the original purchaser
5. The system has been modified or repaired by someone other than Rola or an authorized Rola stockist
6. Rola cannot establish any fault after inspection of returned product
7. The system has been subject to abnormal conditions, including fire, water, humidity, pressure, stress or similar
8. The defect in the system has arisen due to abuse, misuse, neglect or accident
9. The defect in the system has arisen due to the unlawful or unusual operation of the vehicle to which it is fitted
10. The defect in the system has arisen due to the purchaser's failure to properly assemble, install, fit, maintain or use the system in accordance with the specifications and instructions provided by Rola.

For safety and use instructions, please refer to any General or Specific Fitting Instructions and Warning & Care Instructions enclosed within the system or on our website at [www.rola.com.au](http://www.rola.com.au).

This warranty does not extend to fair wear and tear. Warranty claims can be made by contacting Rola directly using the details below. A warranty claim must be accompanied by proof of purchase (such as receipt), details of the alleged defect and appropriate documentation (such as historical and maintenance records where appropriate). The customer must make the product available to Rola or its authorized repair agent for inspection and testing. If such inspection and testing finds no defect in the product, the customer must pay Rola usual costs of service work and testing. It is the purchaser's responsibility to arrange and pay to return the product or component to the place of purchase. The purchaser may seek reimbursement from Rola for the cost of such activities, providing Rola notifies the purchaser in writing that a warranty claim is justified. Any such claims made must be in writing via post or email.

The benefits of this warranty are in addition to any rights and remedies imposed by Australian State and Federal legislation that cannot be executed. Nothing in this warranty is to be interpreted as excluding, restricting or modifying any State or Federal legislation applicable to the supply of goods and services which cannot be so excluded, restricted or modified. Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure. Rola makes no express warranties or representations other than set out in this warranty.


## System carrying capacities

Fitment	A	B	C	D
	Maximum Vehicle Roof Load Rating (KG)	Rola System Weight (KG)	Actual Maximum Dynamic Payload (KG) (C=A-B)	Actual Maximum Static Payload (KG)
Ridge Mount + Titan Tray	150	31	119	400
Low Mount + Titan Tray	105	27	78	235
2x Rola Cross Bars	70	4	66	170


# ROLA®

## SAFETY REQUIREMENTS

Manufactures roof weight limit - rack system weight = Max carrying capacity.

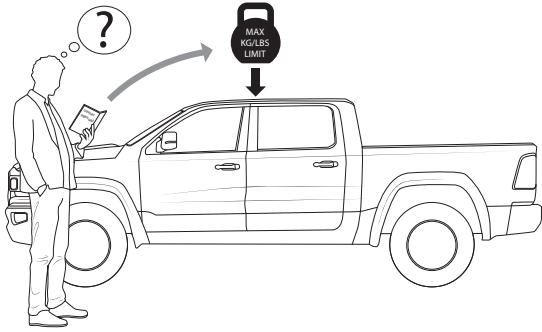


Cross reference with system max carrying capacity. **Always use the lower of the two figures.**

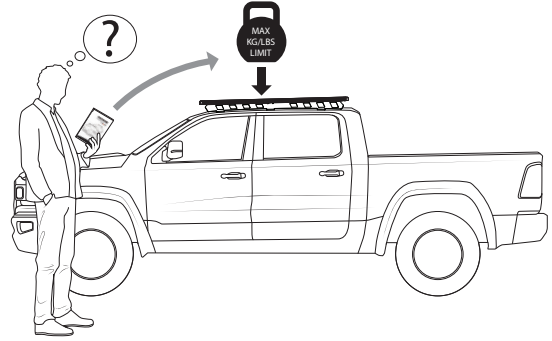


### IMPORTANT - Off-road load rating reduction.

System	Track Mount	Anchor Point	Gutter Mount	Raised Rail	Flush Rail	Clamp Mount
Tray+ Ridge Mount	0%	0%	25%	0%	N/A	N/A
Tray+ Low Mount	33%	33%	33%	33%	33%	50%
Sports Extended	33%	33%	33%	33%	33%	50%
Sports Concealed	33%	33%	33%	33%	33%	50%

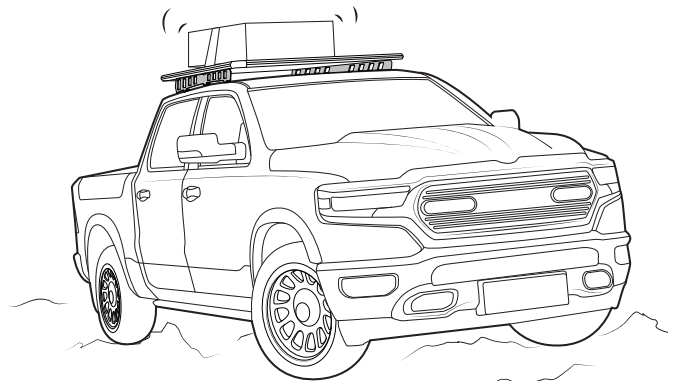


Distribute carried load evenly longitudinally and as low as possible. Do not concentrate loads front or rear.


**CORRECT**




**CORRECT**




**X**




**CORRECT**

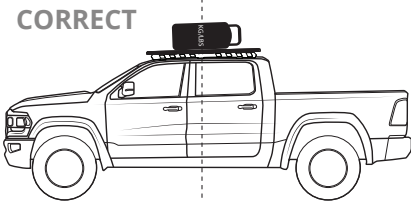


**CORRECT**

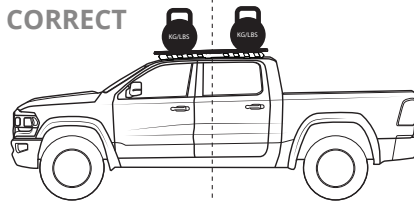


**X**

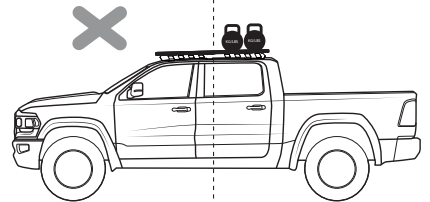

**X**

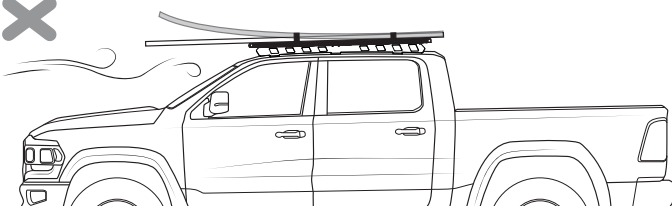

**CORRECT**

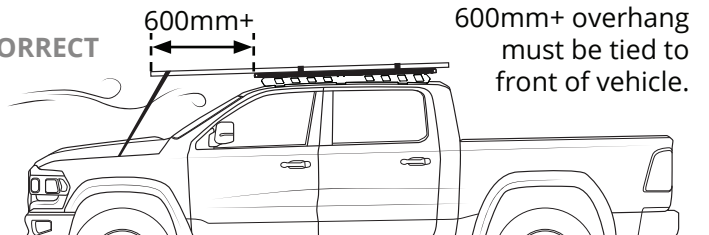

600mm+ overhang must be tied to front of vehicle.

JUST ADD ADVENTURE

ROLA

# ROLA®

## SAFETY REQUIREMENTS

