


# RIDGE MOUNT

by **ROLA**®

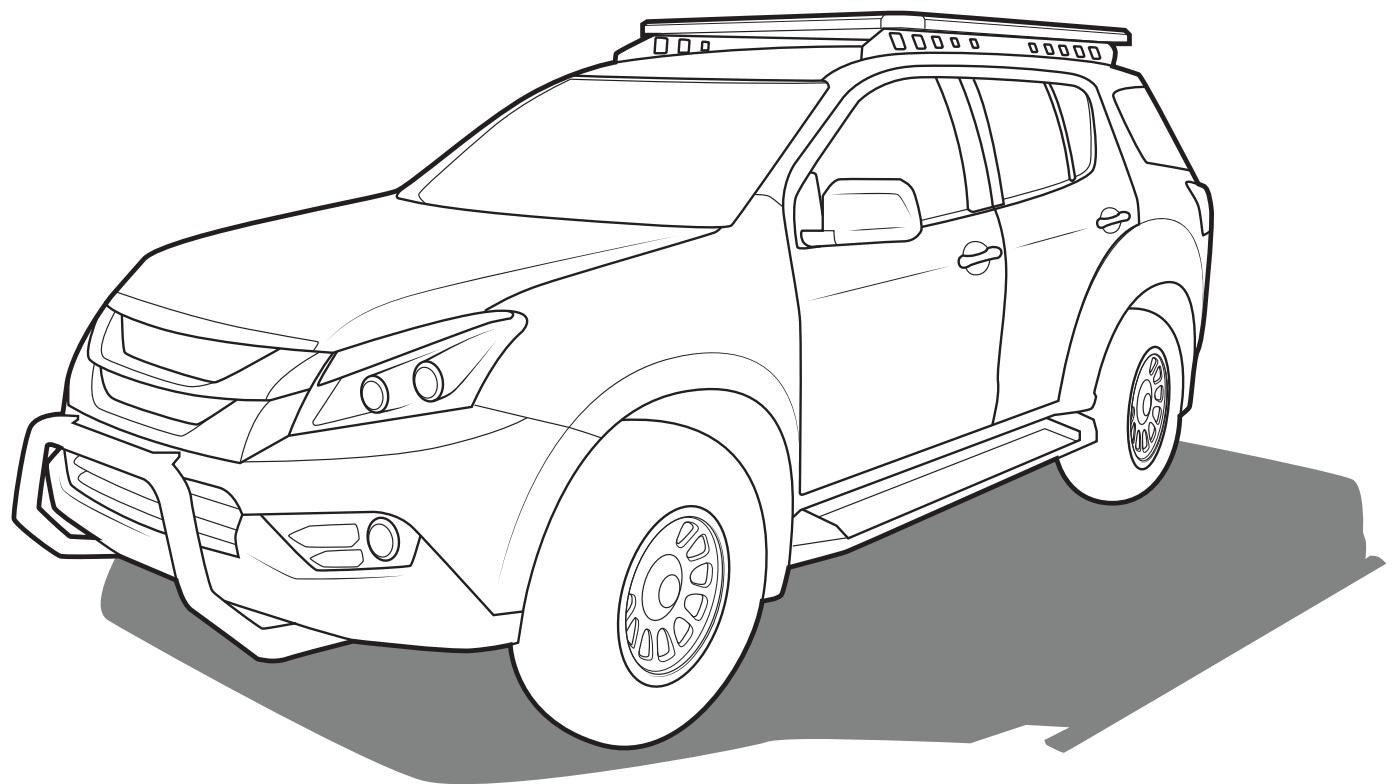

ISUZU MUX GEN 1 LSU, LSM, LST - RIDGE MOUNT SYSTEM  
RM36830 Issue 02

Read this full instruction prior to commencing assembly and fitment of Ridge Mount System.

CONTENT - CHECK ALL PARTS ARE CORRECT BEFORE PROCEEDING

A		Ridge Mount (pair)	1
B		Front Stud Plate	2
C		Middle and Rear Stud Plate	4
D		M8 x 25mm Cap Screw	24
E		M8 Flat Washer	40
F		M8 Nyloc Nut	16
G		Butyl Patch	12
H		Interlocking Block	3



TOOLS REQUIRED

- 6mm Allen tool.
- Step ladder.
- 12mm Socket wrench.
- Tape measure.
- Chisel.
- Nylon scrape.
- Dremel.
- Cold galvanising paint.
- Small flat blade screwdriver.
- Hammer.
- Power drill.
- Drill stop.
- 3mm drill bit.


## LSU-LSM FITMENT (FOR LST MOVE TO STEP 11)

1

Measure 205mm back from the tooling mark on the gutter fill, just behind the windshield. Create a reference on the gutter fill.

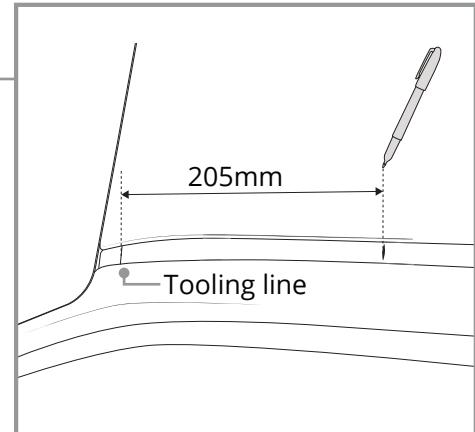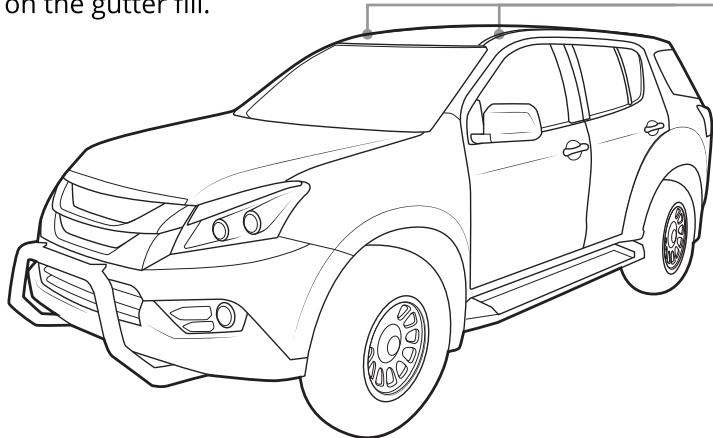


Using a chisel, strike the gutter fill at the reference made previous.

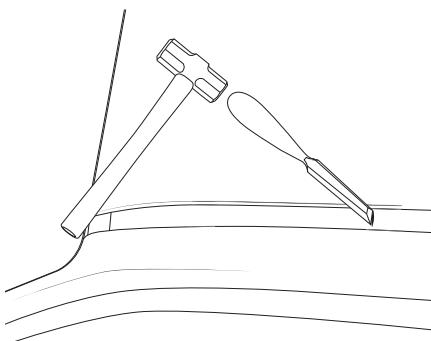


Lift the gutter fill, up to the chisel strike.



Move the fill back and forth until it breaks free of the vehicle. Use cutters if required.

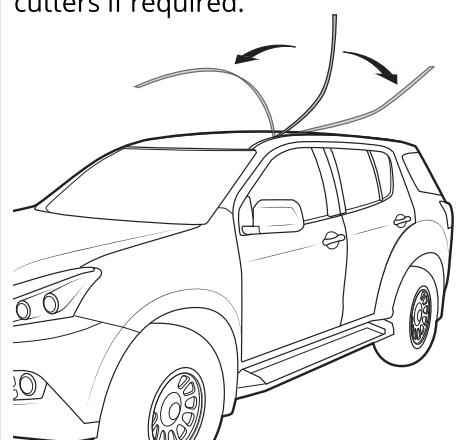



Use a nylon scrape and remove any material from the now bare gutter.

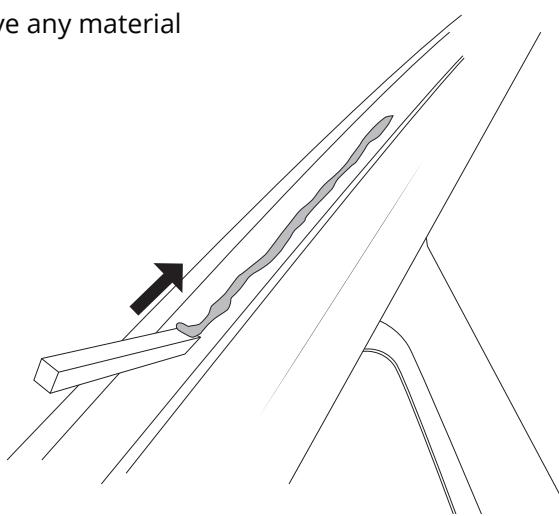

3


4

Measure 220mm forward, from the inside lip of the 5th door, and create a reference, centred, in the gutter.

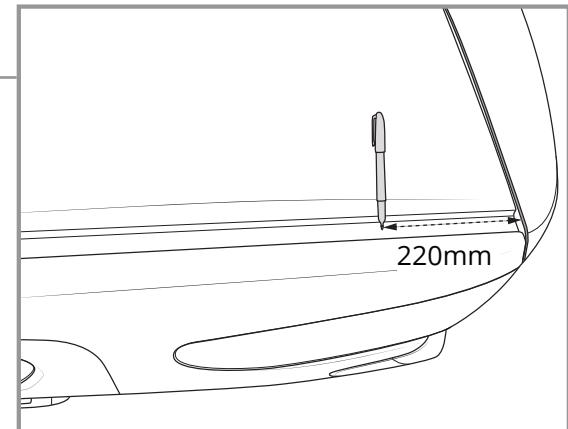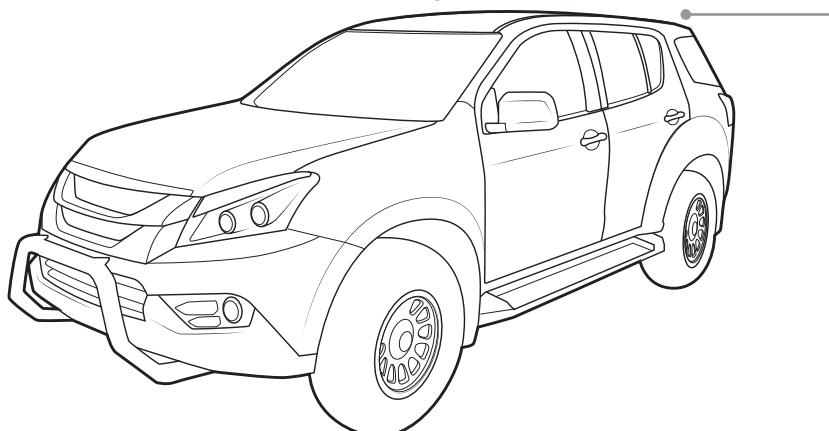


5

Using a 3mm drill bit, drill through the reference made previous.

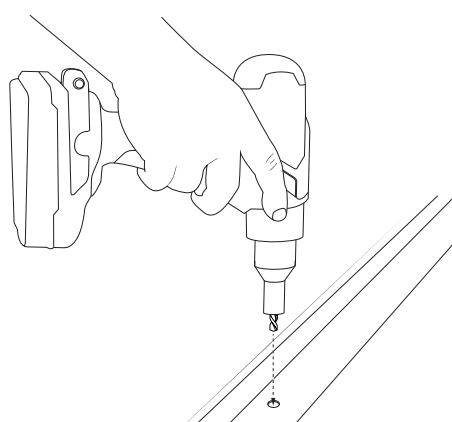


Use a drill stop set to 5mm.

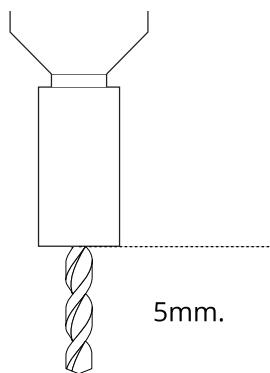


6

With a dremel, slowly open out the hole drilled previously. Fully expose the thread below the roof surface.

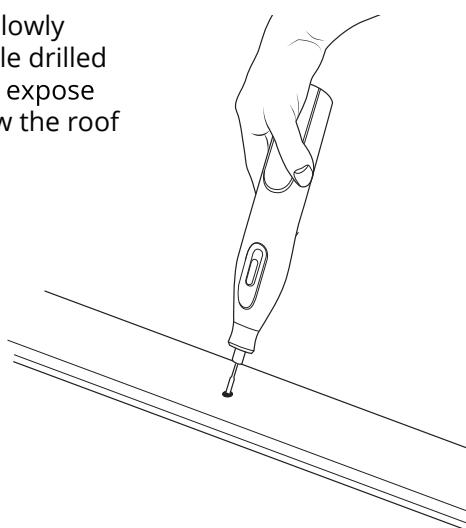


Vacuum any swarf from the roof.

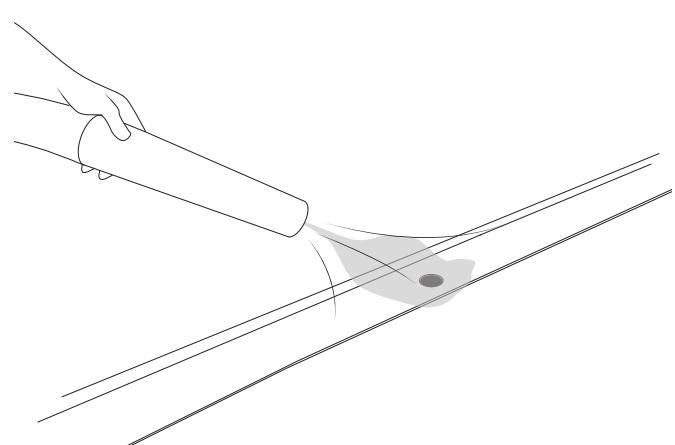


7

Place the Ridge Mounts onto the roof and fix in place with an M8 cap screw at the rear.

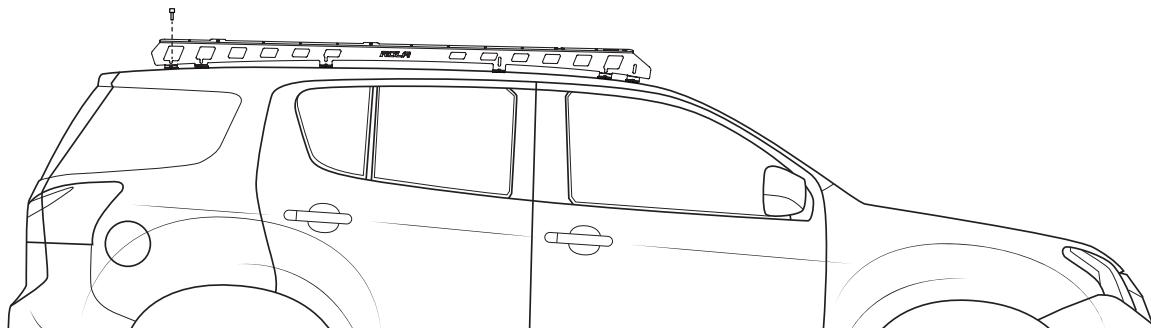


8

Place the Ridge Mounts onto the roof and fix in place with an M8 cap screw at the rear. Remove the Ridge Mount when complete.

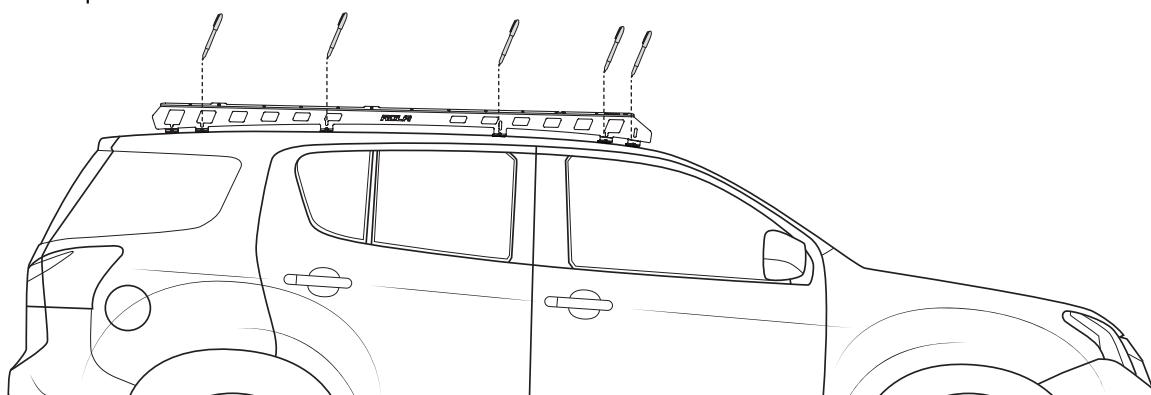

9


Repeat steps 5 and 6, for the references made previous.

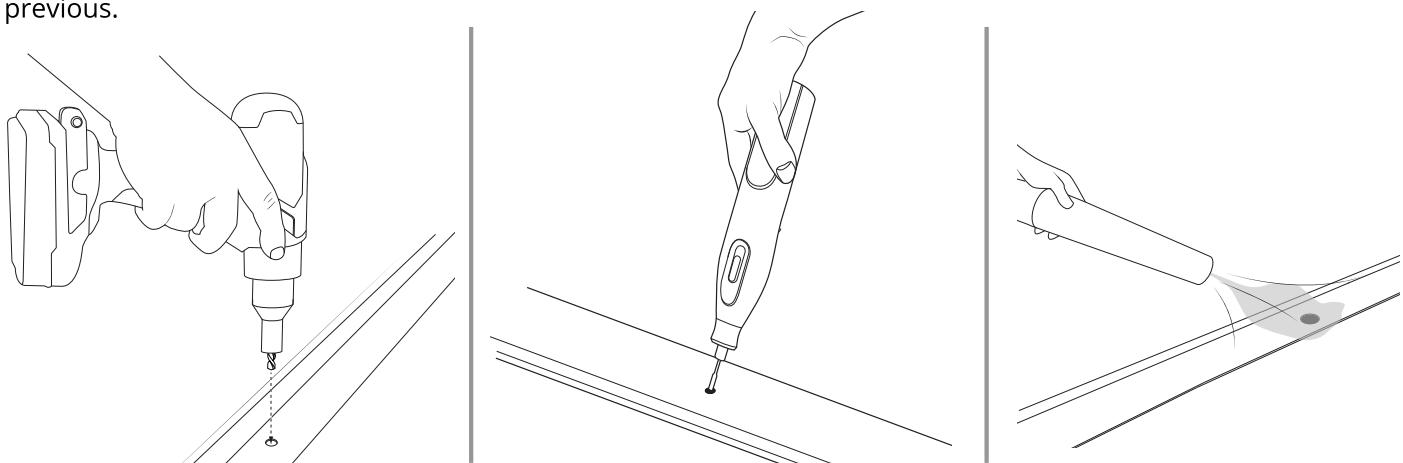


## MOVE TO STEP 15 WHEN COMPLETE

10

Use cold galvanising paint on all holes drilled. Allow 15min to dry.

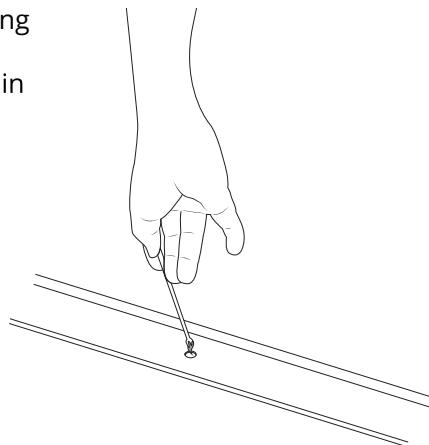

Apply butyl patches to all holes in the roof.

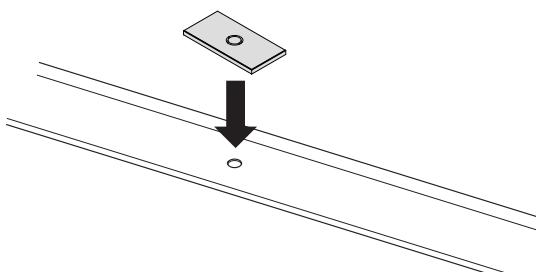


## LST RAIL REMOVAL



11

Remove the end caps and covers of the factory rail.

Use a small flat blade screwdriver to release the covers along the rail.

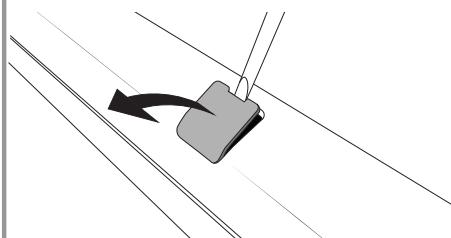


Pry the inside edge, carefully outward to release clips. Pull forward and out to remove.

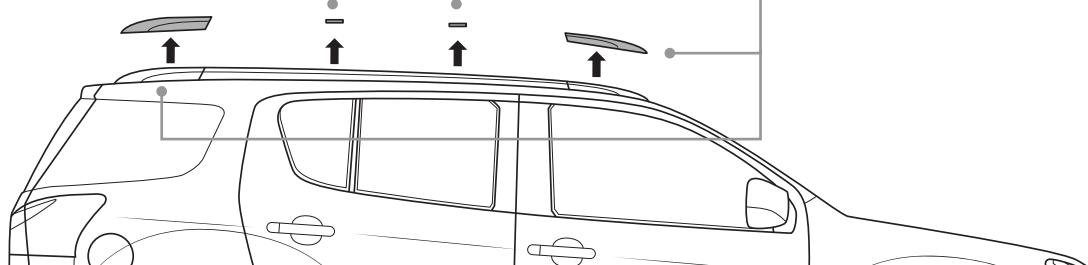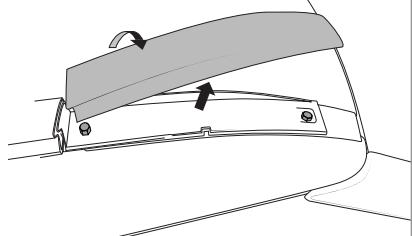


12

Remove hardware from the front and rear of the rail, using a 12mm socket.


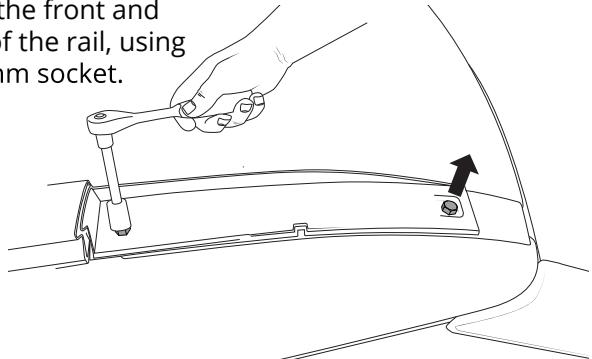


Use a torx 25 tool to remove the mid rail hardware.

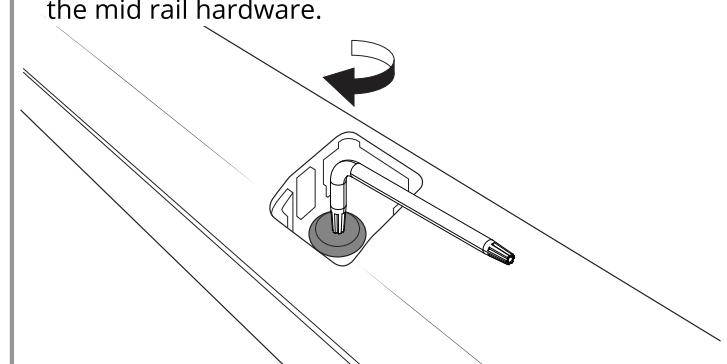


13

Remove the rails from the roof of the vehicle.

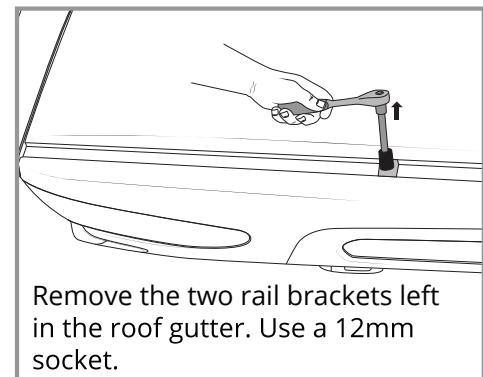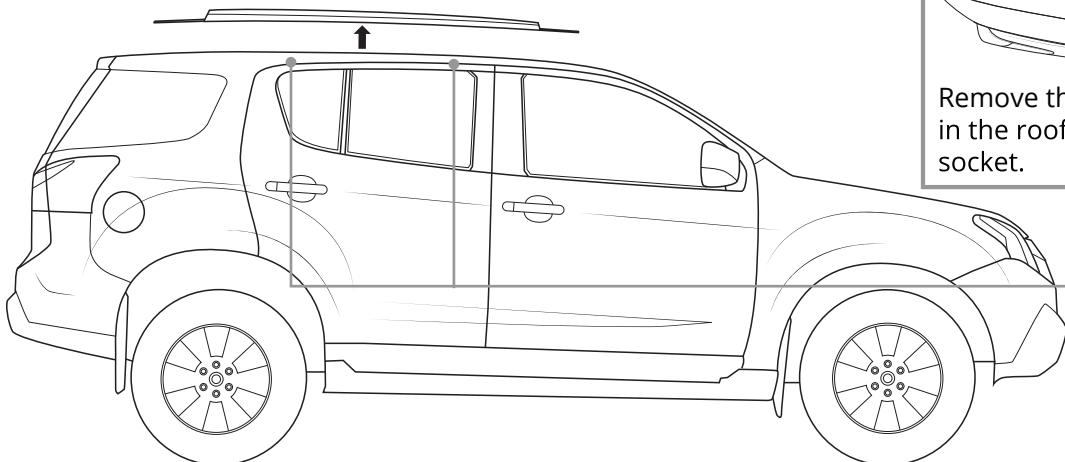


14

Apply butyl patches to all mounting holes in the roof.

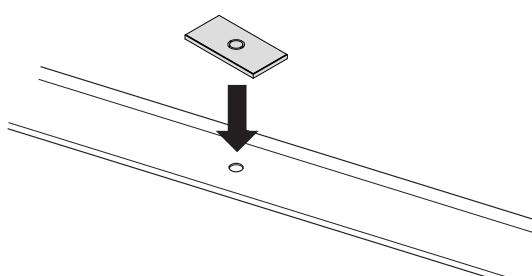


15

Fix the Ridge Mounts to the roof of the vehicle.

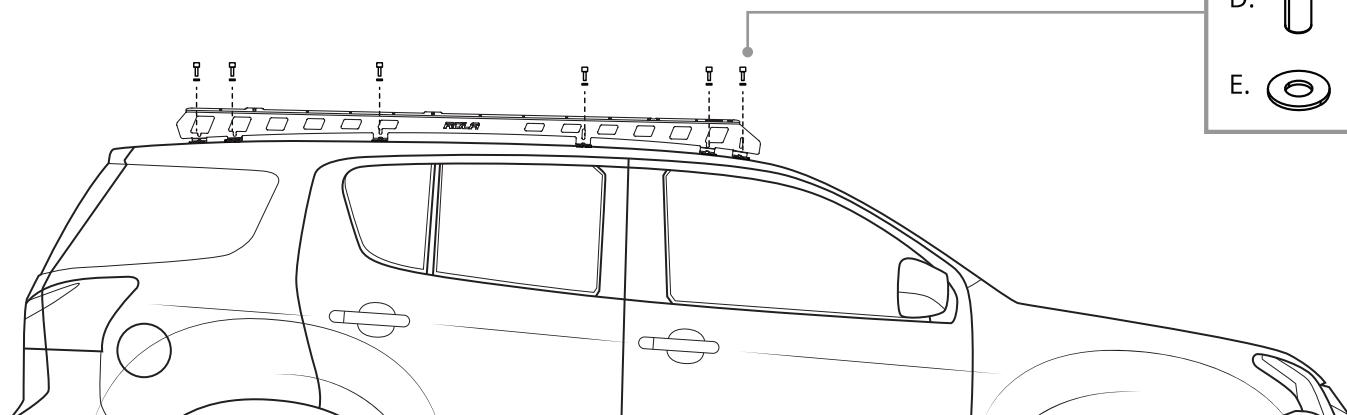

16


Install the front stud plates.

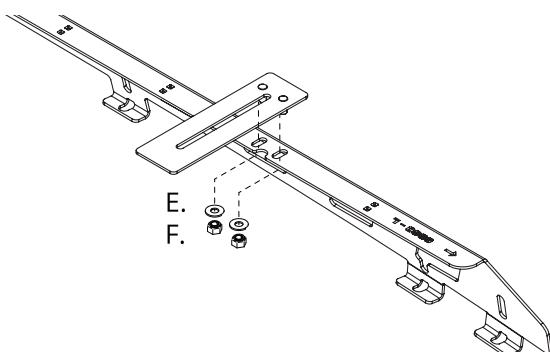

## TITAN TRAY FITMENT


17

Install the Rola Titan Tray as per corresponding instructions.

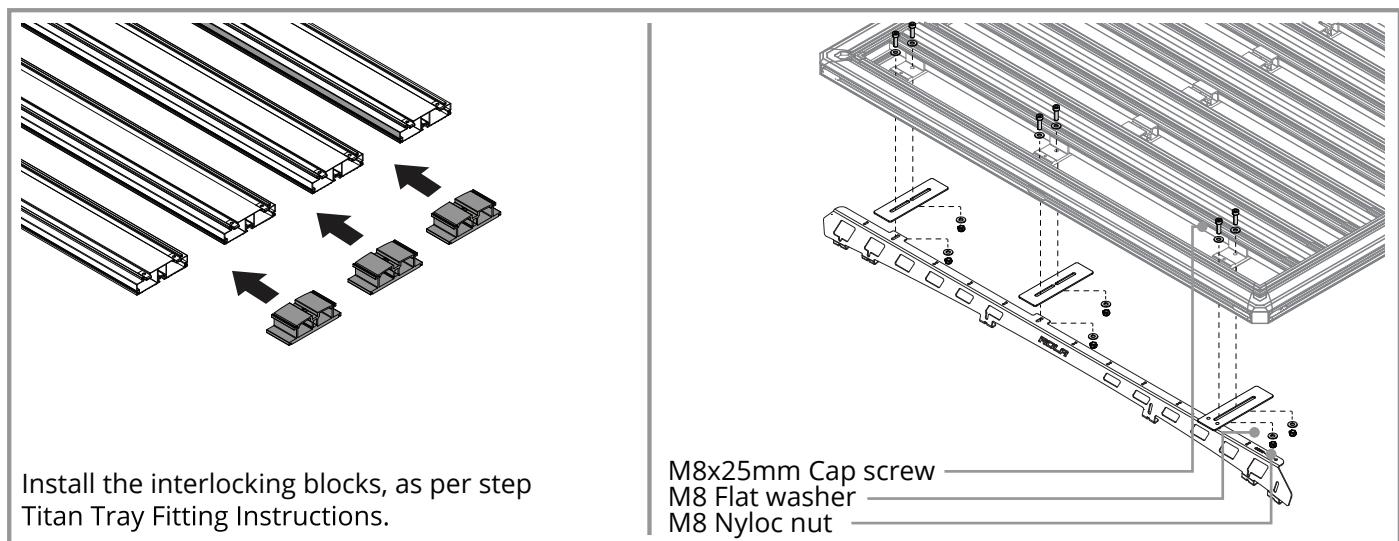


Install the interlocking blocks, as per step  
Titan Tray Fitting Instructions.

Note:

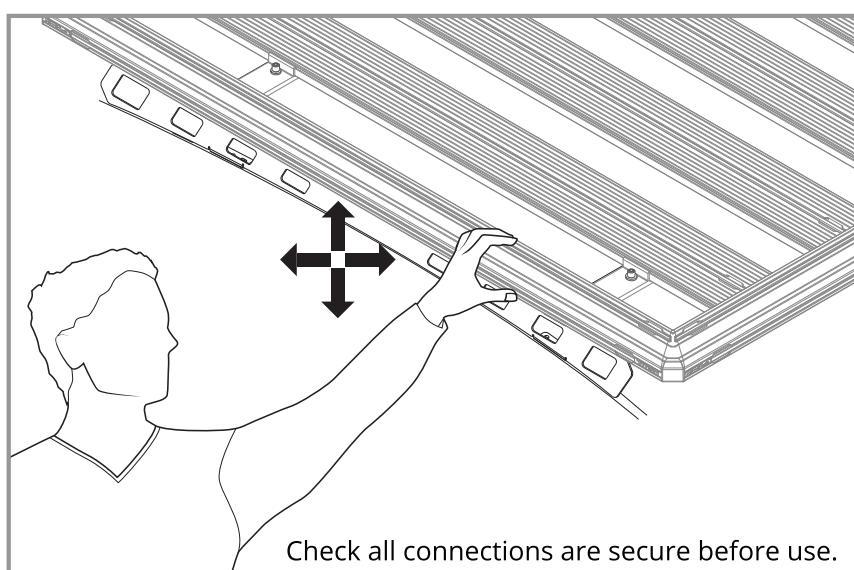

Wiring can be run and secured on the  
underside of the Ridge Mount rail as  
shown.

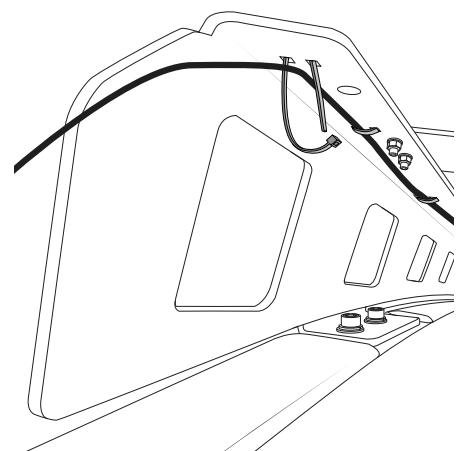

**IMPORTANT - READ BEFORE USE**

Please ensure the system is fitted in accordance with the fitting instructions.  
It is important that you observe all outlined below.

**WARRANTY INFORMATION**

Rola warrants that, subject to exclusions and limitations below, the system will be free from defects in materials and workmanship for a period of 2 years commencing on the date of sale by the authorized Rola stockist to the original purchaser of the system.

If a defect appears in the system before the end of the warranty period and Rola finds that the defect is in materials or workmanship, Rola will, in its sole discretion, either:

1. Repair the system or the defective component of the system free of charge
2. Replace the system or the defective component of the system; or
3. Refund the purchase price of the system to the original purchaser.

Rola reserves the right to change the design, specifications or composition of the system without notice and without liability.

Rola reserves the right to replace defective products or components with products or components of similar quality, grade and composition, where an identical product or component is not available. Goods presented for repair may be replaced by refurbished goods of the same type rather than being repaired. Refurbished parts may be used to repair the goods. The 2 year warranty does not apply where:

1. The system is not installed in compliance with the fitting instructions provided
2. The system is not used as intended or designed
3. The system has been on-sold or assigned by the original purchaser
5. The system has been modified or repaired by someone other than Rola or an authorized Rola stockist
6. Rola cannot establish any fault after inspection of returned product
7. The system has been subject to abnormal conditions, including fire, water, humidity, pressure, stress or similar
8. The defect in the system has arisen due to abuse, misuse, neglect or accident
9. The defect in the system has arisen due to the unlawful or unusual operation of the vehicle to which it is fitted
10. The defect in the system has arisen due to the purchaser's failure to properly assemble, install, fit, maintain or use the system in accordance with the specifications and instructions provided by Rola.


For safety and use instructions, please refer to any General or Specific Fitting Instructions and Warning & Care Instructions enclosed within the system or on our website at [www.rola.com.au](http://www.rola.com.au).

This warranty does not extend to fair wear and tear. Warranty claims can be made by contacting Rola directly using the details below. A warranty claim must be accompanied by proof of purchase (such as receipt), details of the alleged defect and appropriate documentation (such as historical and maintenance records where appropriate). The customer must make the product available to Rola or its authorized repair agent for inspection and testing. If such inspection and testing finds no defect in the product, the customer must pay Rola usual costs of service work and testing. It is the purchaser's responsibility to arrange and pay to return the product or component to the place of purchase. The purchaser may seek reimbursement from Rola for the cost of such activities, providing Rola notifies the purchaser in writing that a warranty claim is justified. Any such claims made must be in writing via post or email.


The benefits of this warranty are in addition to any rights and remedies imposed by Australian State and Federal legislation that cannot be executed. Nothing in this warranty is to be interpreted as excluding, restricting or modifying any State or Federal legislation applicable to the supply of goods and services which cannot be so excluded, restricted or modified. Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure. Rola makes no express warranties or representations other than set out in this warranty.

## SAFETY REQUIREMENTS

Manufacture's roof weight limit - rack system weight = Max carrying capacity.

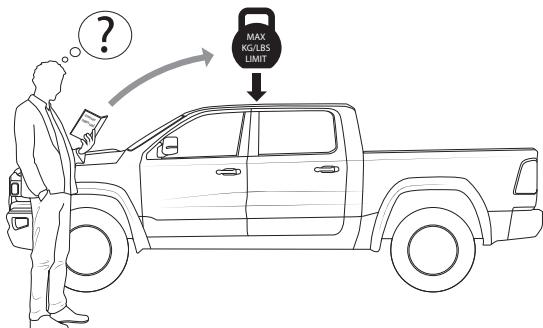


Cross reference with system max carrying capacity.  
**Always use the lower of the two figures.**

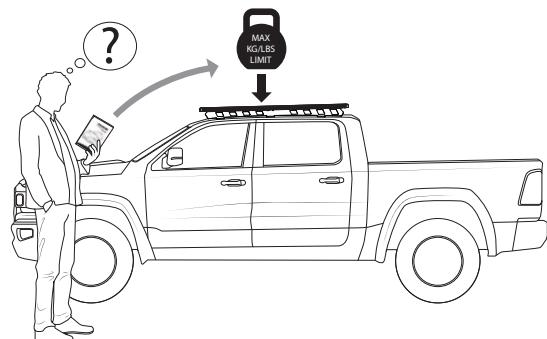


## IMPORTANT - Off-road load rating reduction.

System	Track Mount	Anchor Point	Gutter Mount	Raised Rail	Flush Rail	Clamp Mount
Platform+ Ridge Mount	0%	0%	25%	0%	N/A	N/A
Platform+ Low Mount	33%	33%	33%	33%	33%	50%
Sports Extended	33%	33%	33%	33%	33%	50%
Sports Concealed	33%	33%	33%	33%	33%	50%


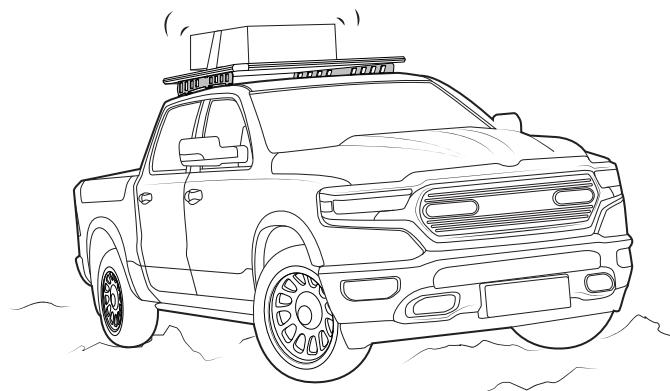


Distribute carried load evenly longitudinally and as low as possible.


**CORRECT**

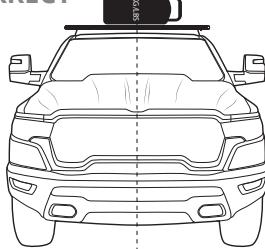




**CORRECT**

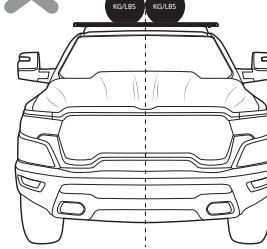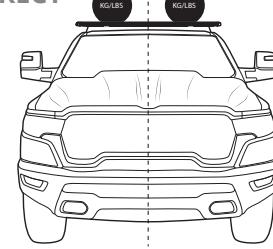


**CORRECT**

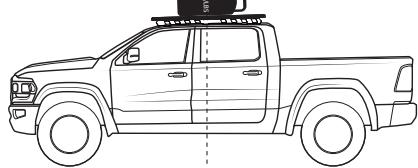

**CORRECT**

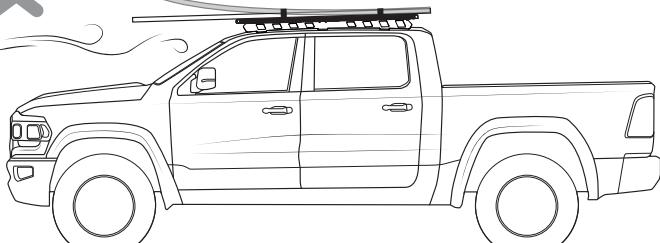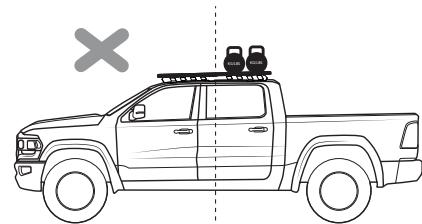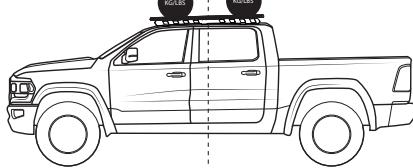

**CORRECT**

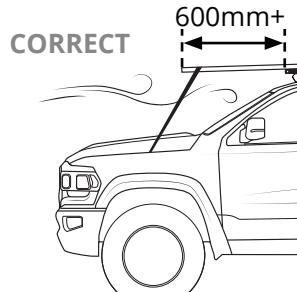


600mm+


600mm+ overhang  
must be tied to  
front of vehicle.

## SAFETY REQUIREMENTS

(A)

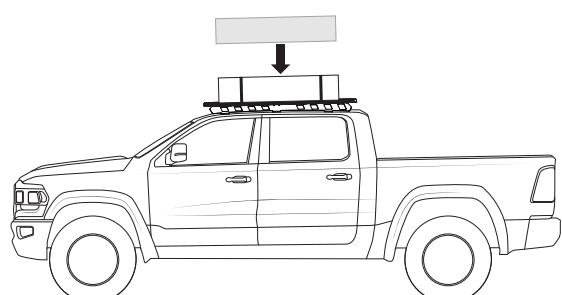


Check all fixtures are secured and torqued correctly.

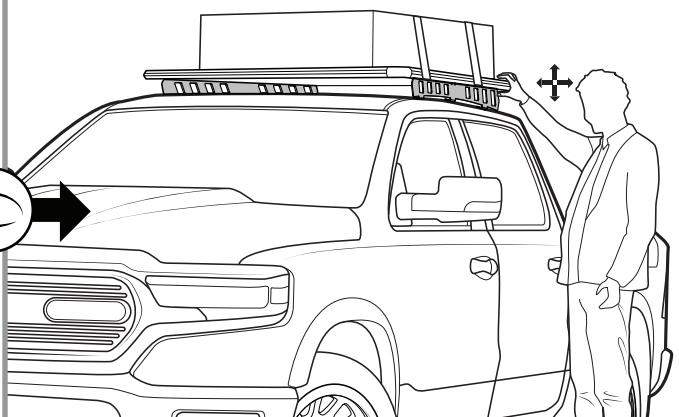


(B)


50km/ 31mi

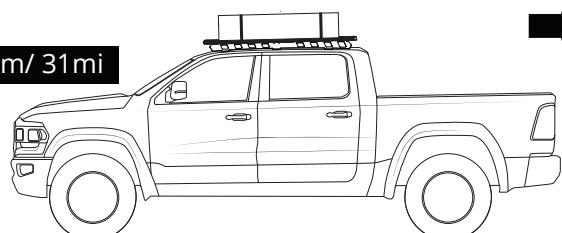


Check all fixtures are secured and torqued correctly.

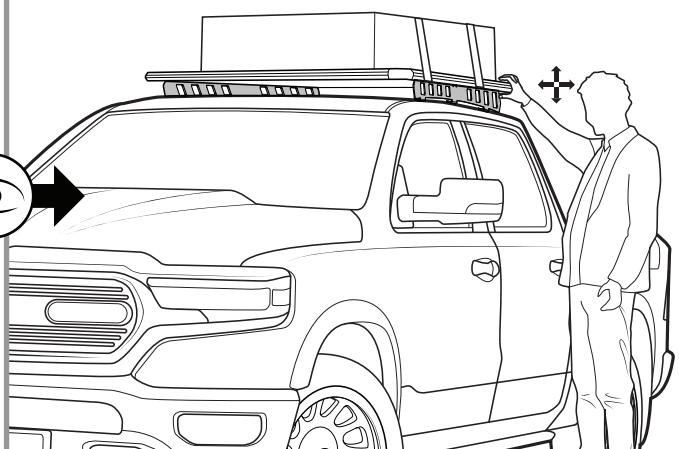

Do not use car-wash with roof rack systems.

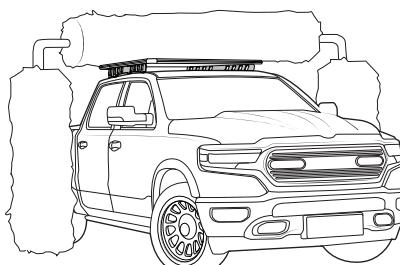

Be aware of adjusted vehicle height.

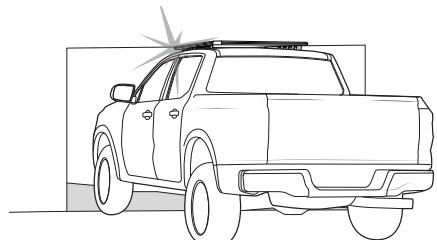

Cab and canopy can move independently, do not fix load across both.

Long loads fixed at front only.

