




RIDGE MOUNT

by **ROLA**[®]

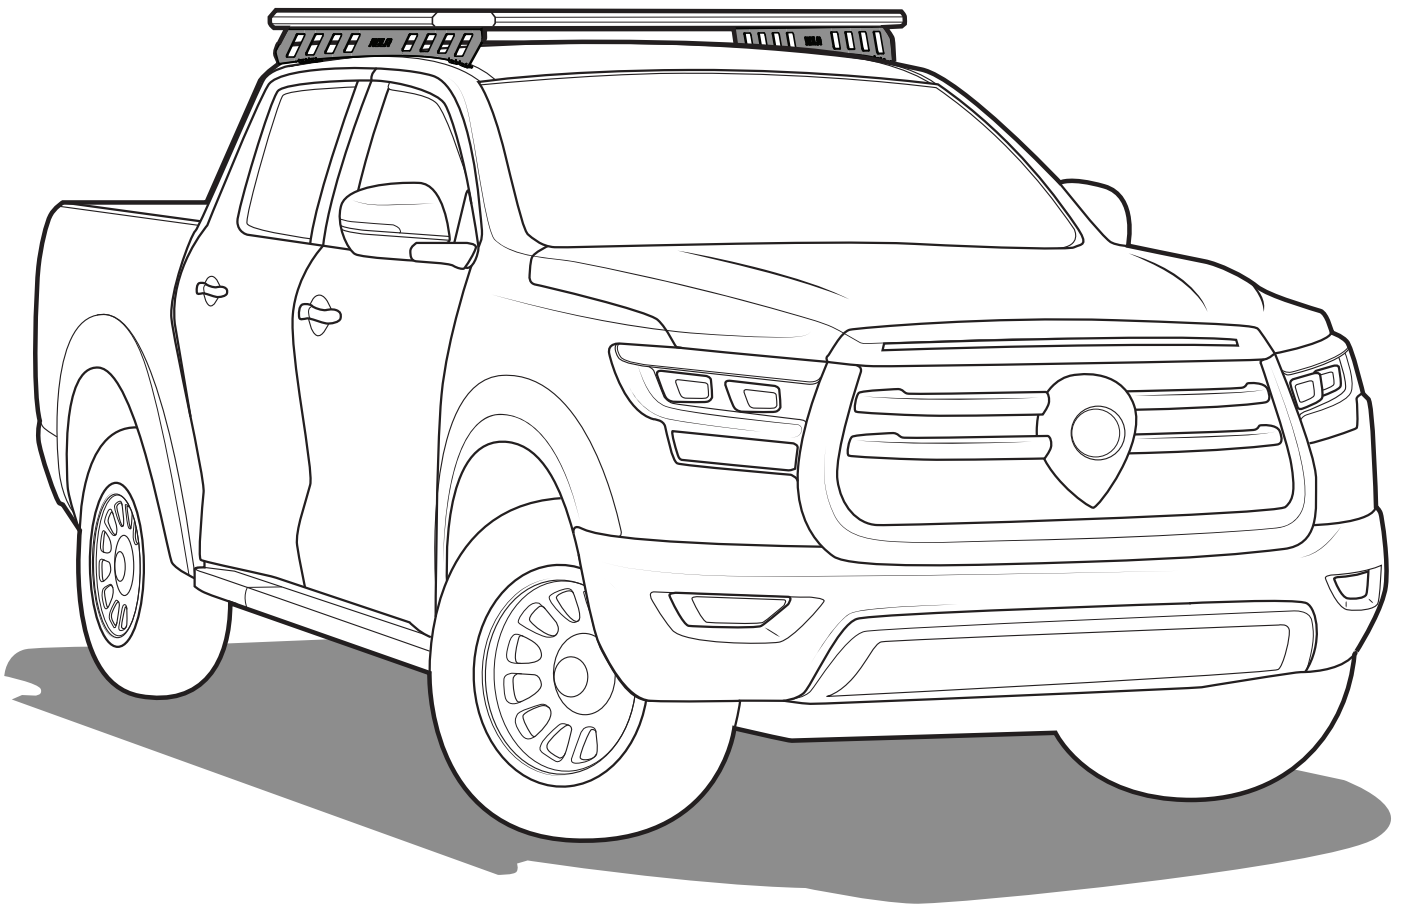

Read this full instruction prior to commencing assembly and fitment of Ridge Mount System.

CONTENT - CHECK ALL PARTS ARE CORRECT BEFORE PROCEEDING


A		Ridge Mount (pair)	1
B		Stud Plate	4
C		M6x30mm Socket Head Screw	8
D		M6 Wide Washer	16
E		M6 Nyloc Nut	8
F		M8 x 30mm Button Head Screw	8
G		M8 Flat Washer	24
H		M8 Nyloc Nut	16
I		Butyl Patch	16
J		Small Spacer	8
K		Interlocking Block	3

TOOLS REQUIRED

- 5mm, 6mm allen tool.
- Socket wrench and set.
- Step ladder.
- Trim tools.
- Butyl mastic
- 10mm spanner
- PH2 screwdriver


1

Move to the side of the vehicle. Use a step ladder to get access to the vehicle.

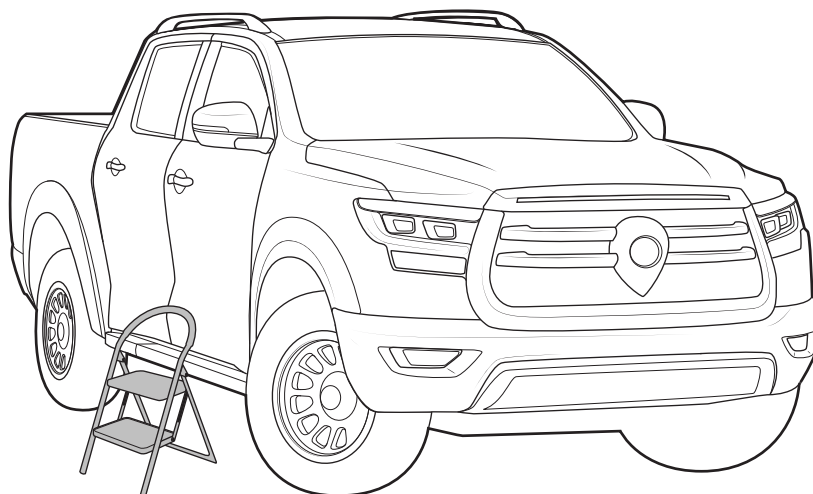


2

To remove the factory rails, the hood lining must be dropped. Begin with removing the sun visors.

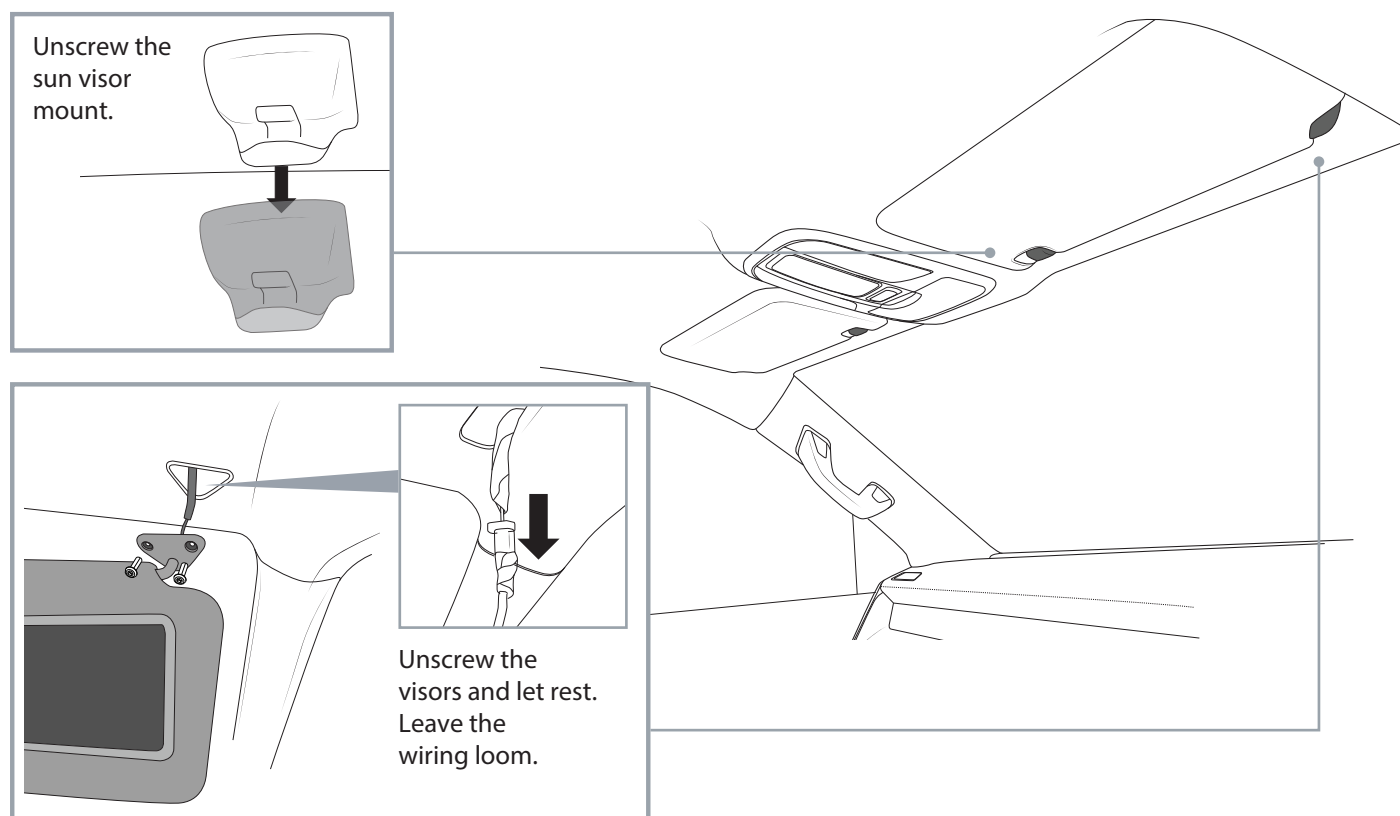



3

Go around the car and pull the door seals down to gain access to the back of the roof trims.

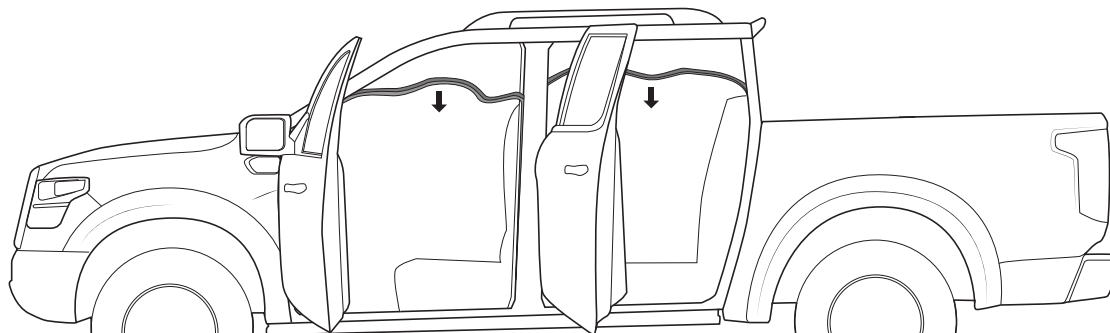


4

Locate the handles on the B-pillars. Pry on the two covers at the top and bottom as shown above the covers will pop out. Remove the 2x 8mm bolts and remove the handle.

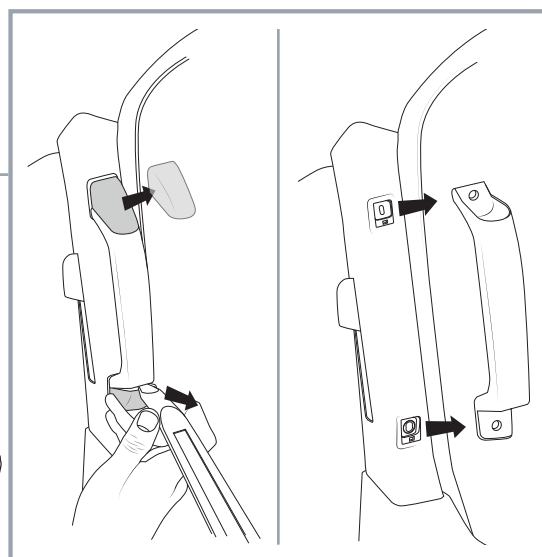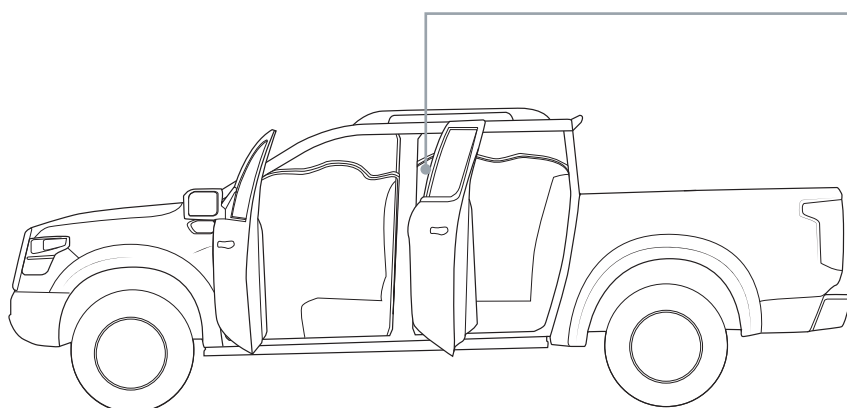


5


Locate the upper grab handles. Pry on the two covers at the top and bottom as shown and the covers will pop out.

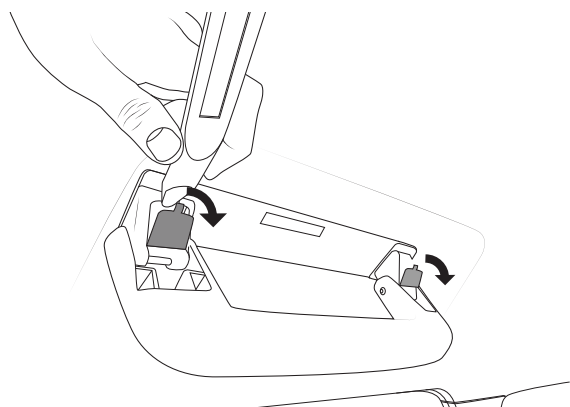

Remove the 2x 10mm bolts and remove the handle.


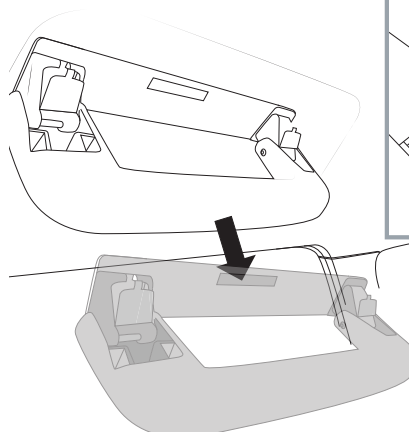


Disconnect wiring harness

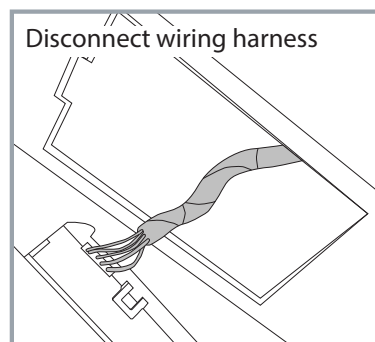



6

Remove the bottom trim of the B-pillar. Pry backwards on both sides to release the clips holding in from behind.

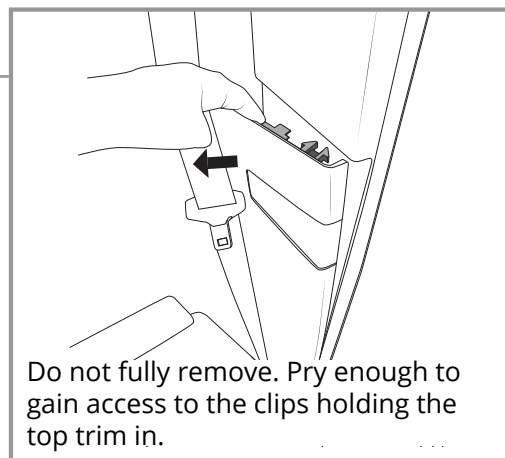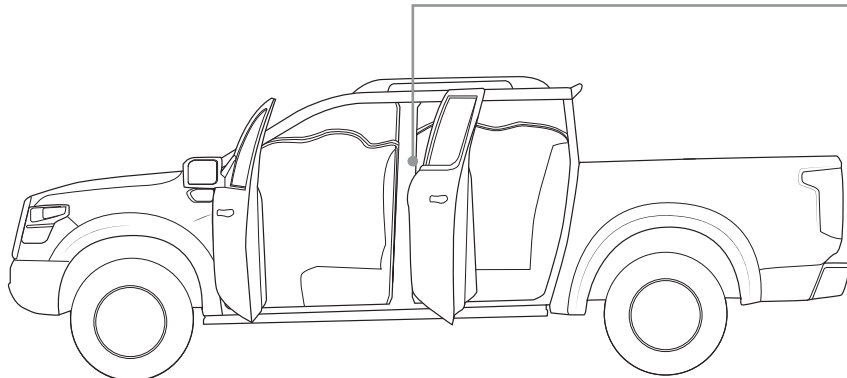


7

To remove the top B-pillar trim, first release the two clips holding it in using the trim removal tool shown as it allows it to go around the clip and pry outwards.

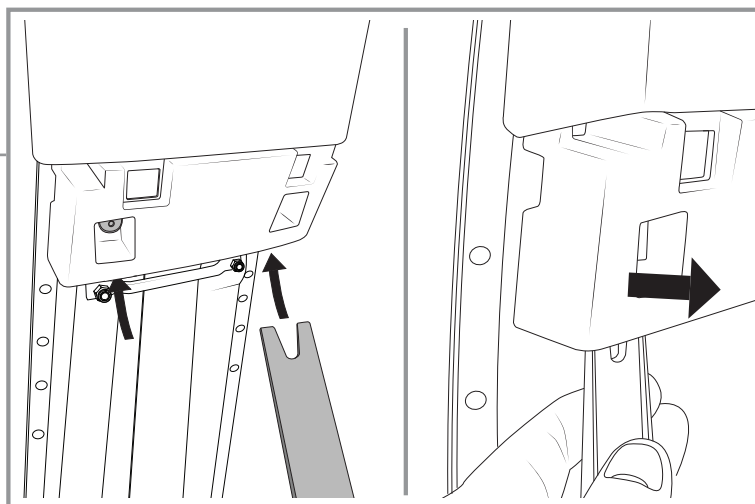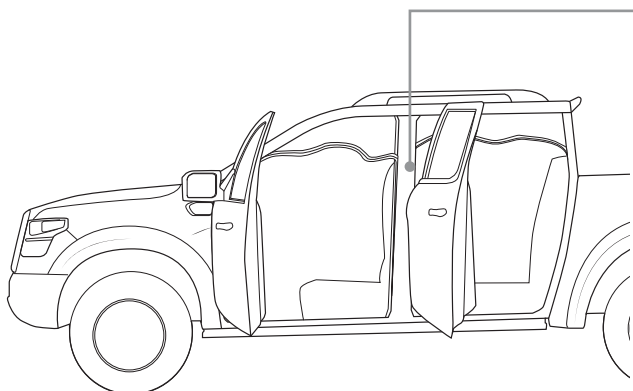


8

Remove the airbag hardware cover, at the top of the B-pillar trim. Remove the 8mm hardware housed below.


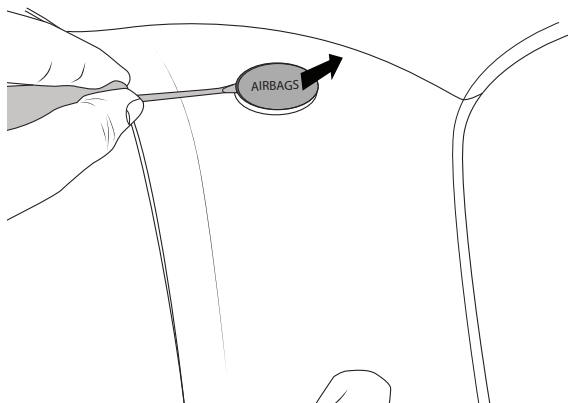


Pry the cover forward slightly, removing its grip from the roof liner.

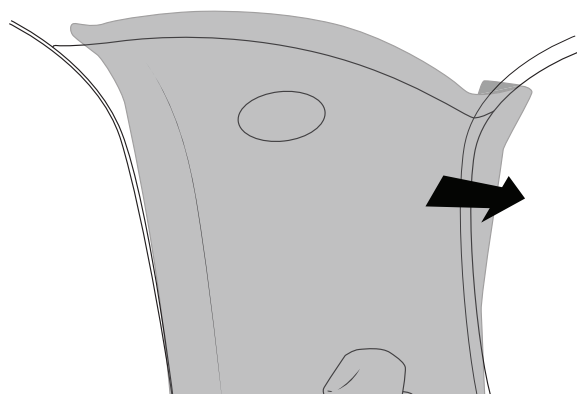



9

Pull the back seat to a forward position.

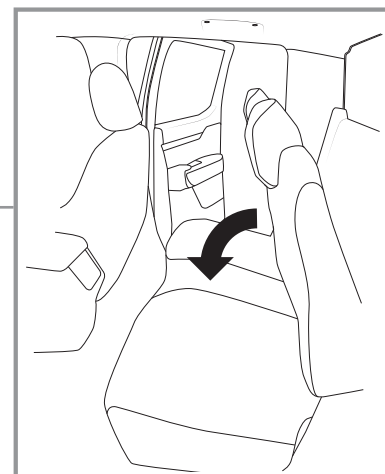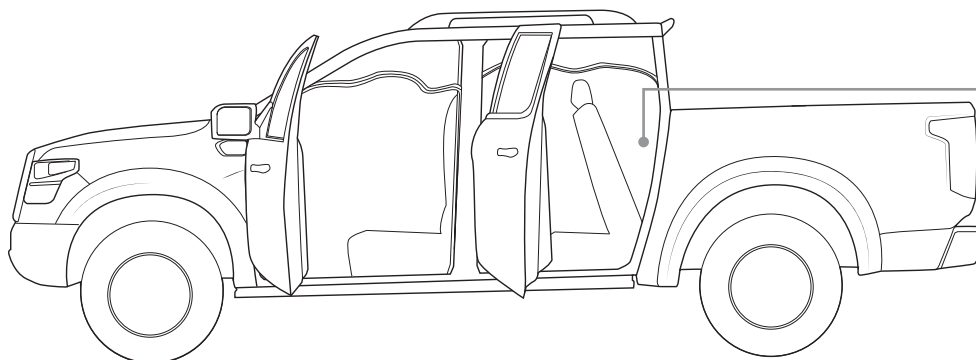



10

With the rear seat forward, a small cushion on either side of the rear of the cab will be exposed. Pry these cushions in towards the centre of the vehicle to remove. Force will be required.

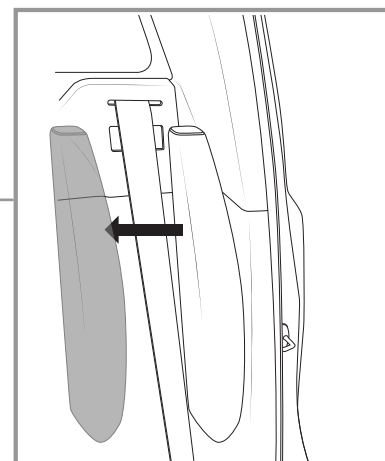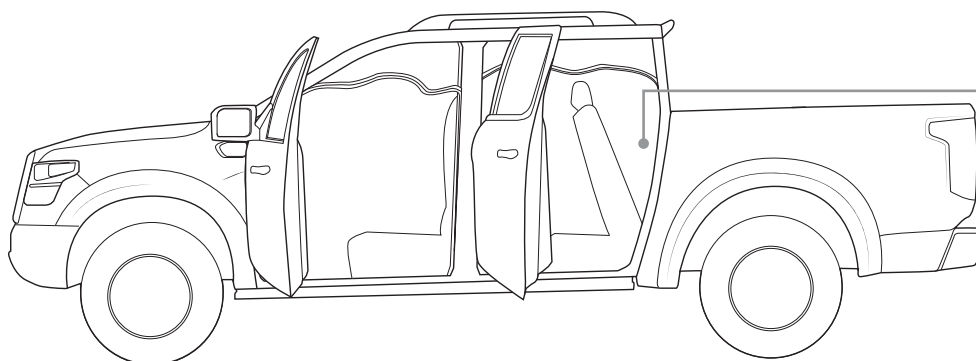


11

Pry the rear seatbelt cover off from the top as shown, the clips will release relatively easily.

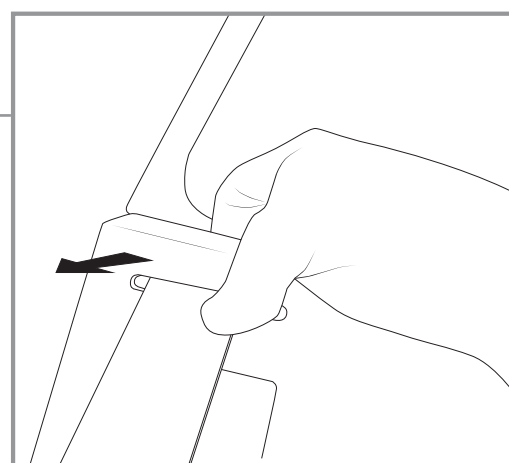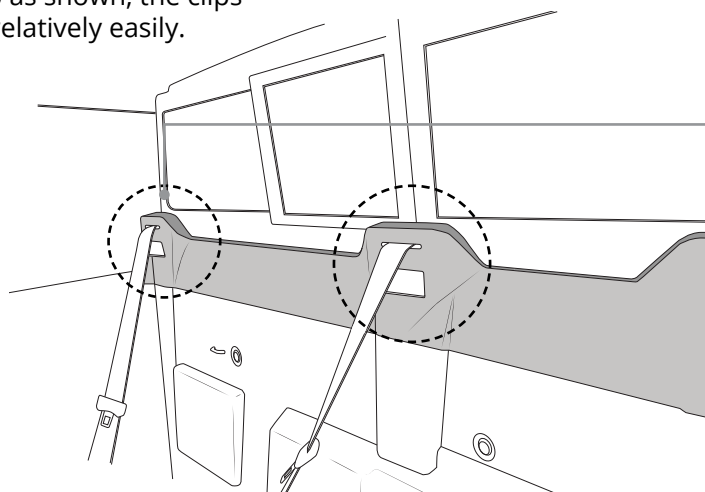


12


Slide the seatbelt cover down, resting it in place as shown.

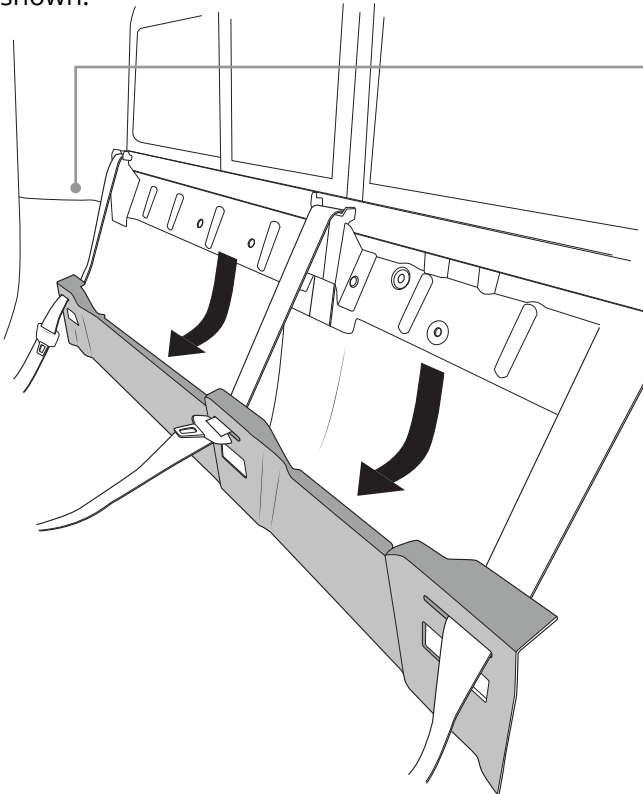

Using trim removal tools pry the two clips holding the carpet at the back.

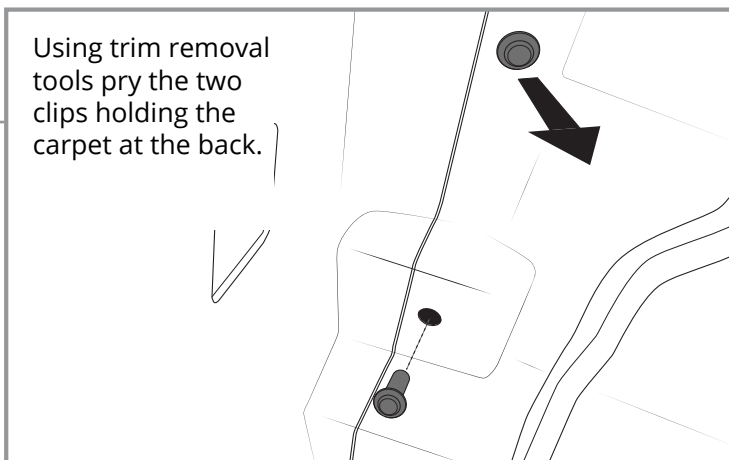


Pry from the outside in to release the bottom trim from the top trim as shown.

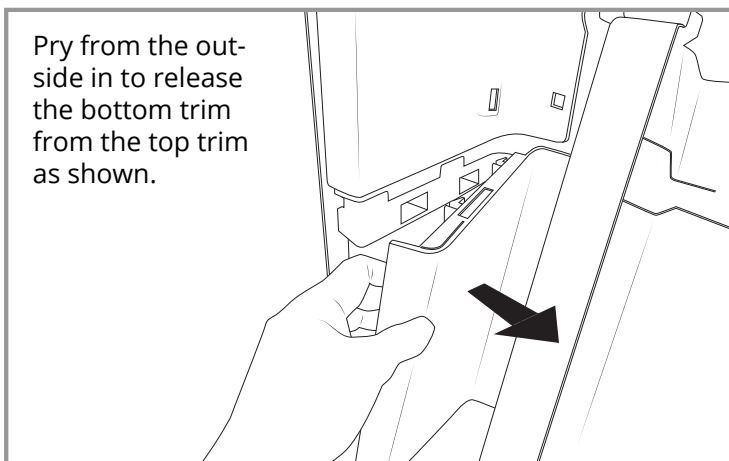


13


Remove the airbag hardware cover, at the top of the C-pillar trim. Remove the 8mm hardware housed below.

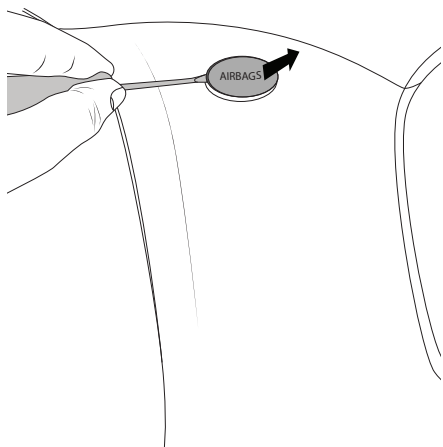

Pry the cover forward slightly, removing its grip from the roof liner.

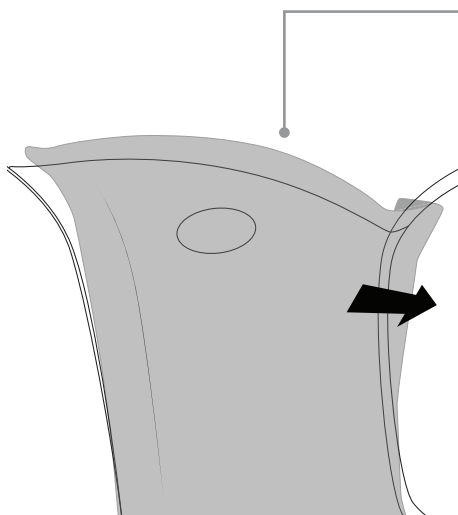


The two marked prongs are slotted into the body work. Pry the trim inwards as much as possible while pushing on the trim from the top to release it.

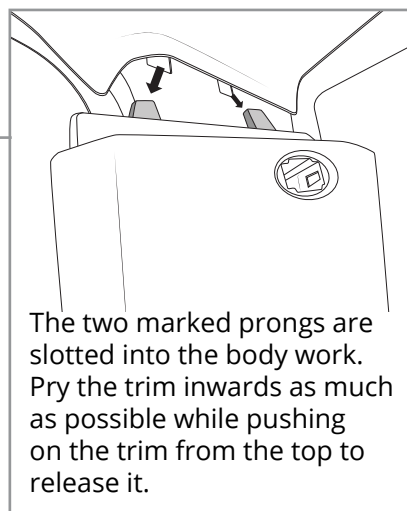


14

Remove the seatbelt bracket from either side of the back seat. 2x 15mm bolts need to be removed to free the bracket.

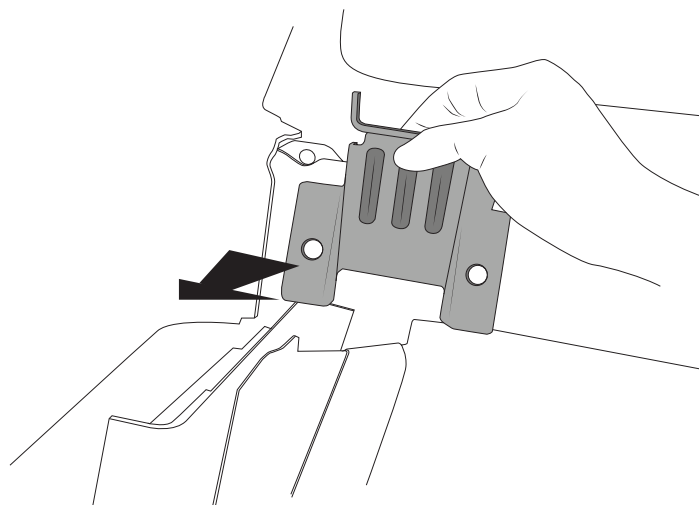


15

Unscrew and remove the grab handles from the A-pillar.

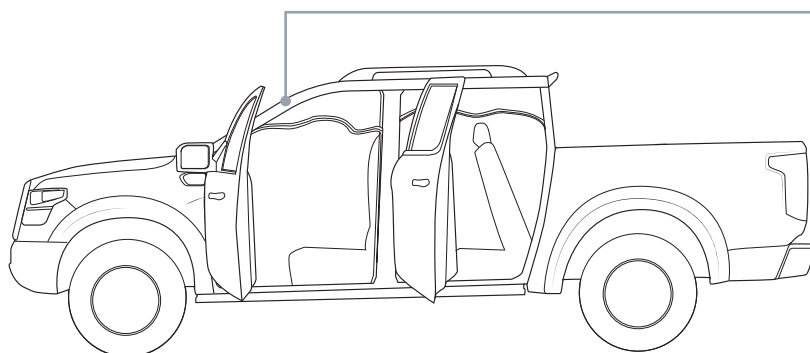

Access hardware through port.


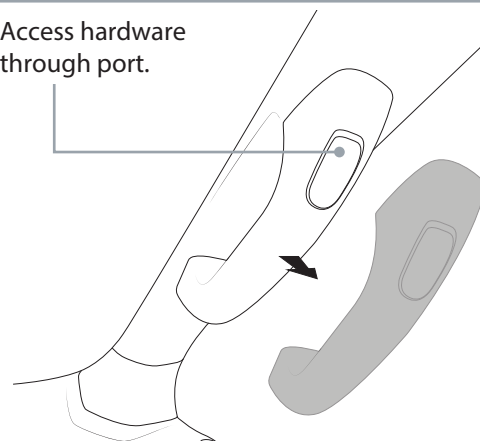


16

Once the grab handle is removed, pry from the outside to release the A-Pillar trim from its clips.



Raise upward once the clips are released to remove it from the dashboard.

Note: The drivers side does not need to be completely removed. The trim just needs to be unclipped.

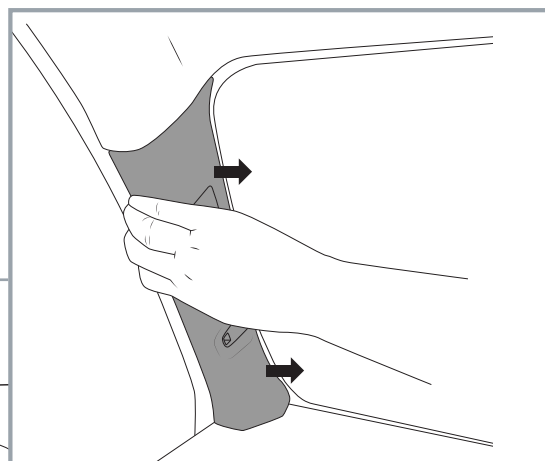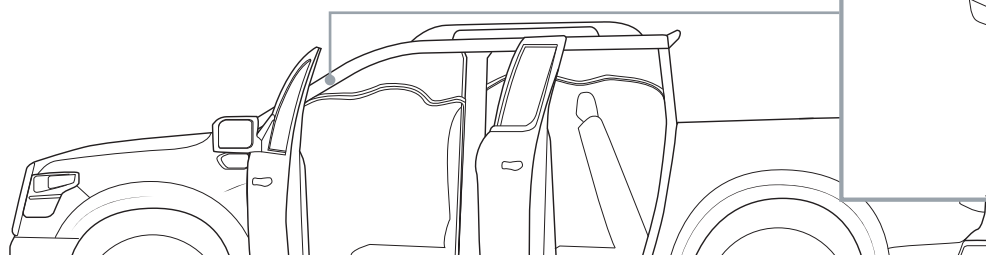


17

Open the sunglass holder, locate the 2x PH2 screws within and remove.

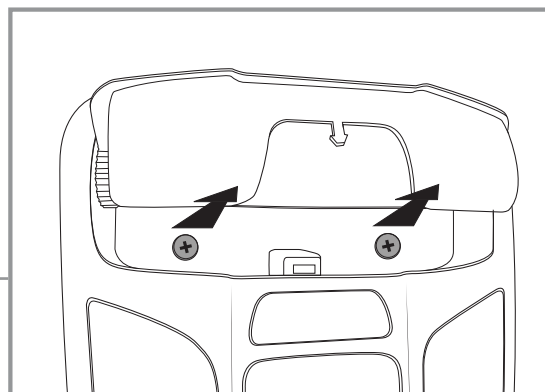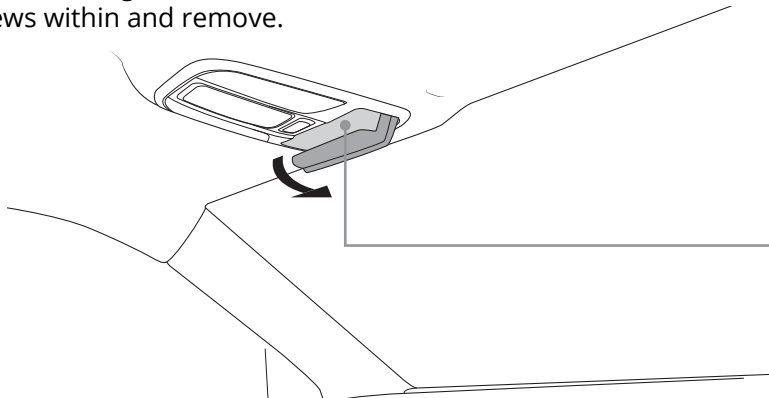


18

Pull the console down carefully and undo the wiring harness.

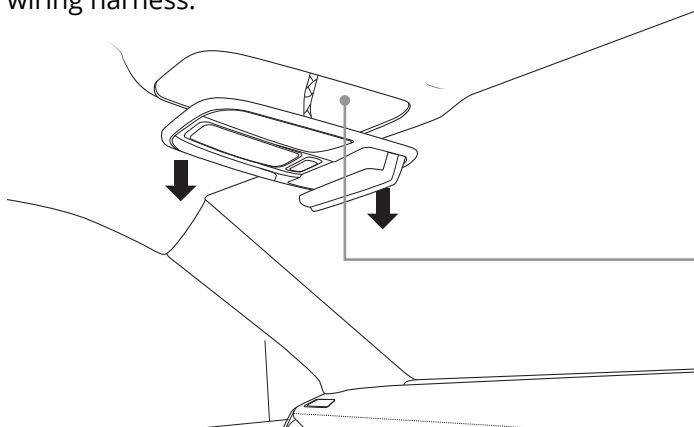


With the console removed, unscrew the 2x PH2 fasteners holding the roof liner to the vehicle.

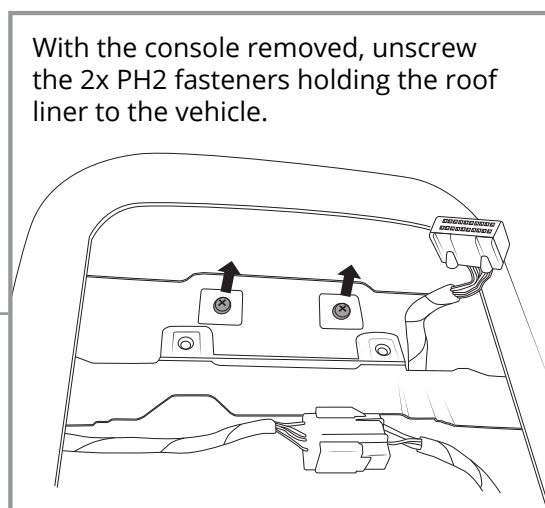



19

Drop the headliner of the vehicle.

Carefully pull around the sun-roof, releasing the velcro tabs holding the roof liner in place.


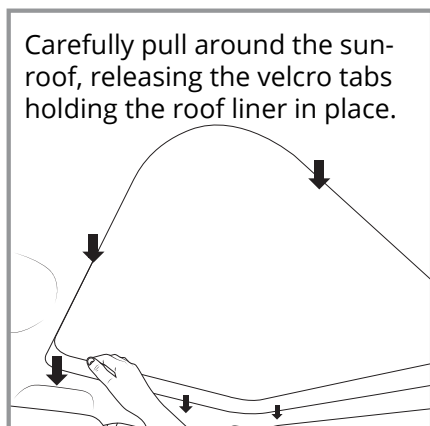


Use a trim tool to release the two clips at the rear of the roof liner.

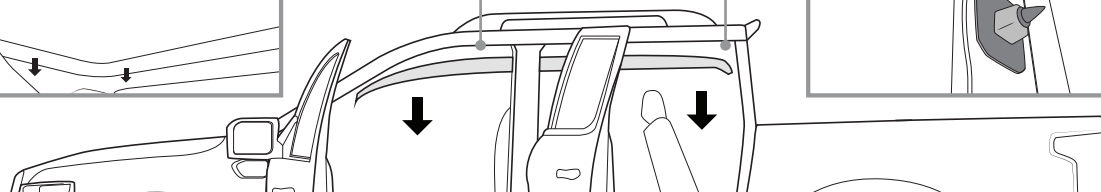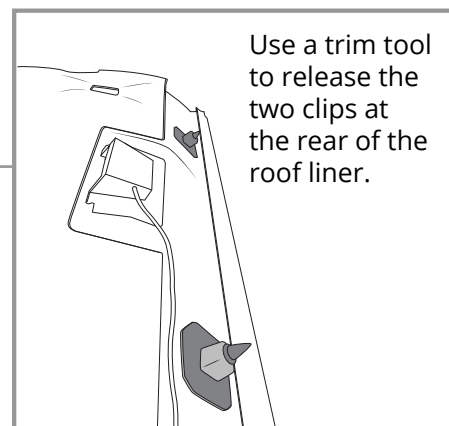


20

The factory rail mount hardware can now be accessed. Remove the 4 factory nuts per side of the vehicle. Use a 10mm socket. **Nut #2** can be difficult to access and may require a spanner.

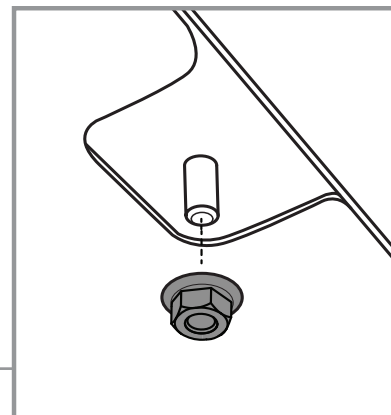
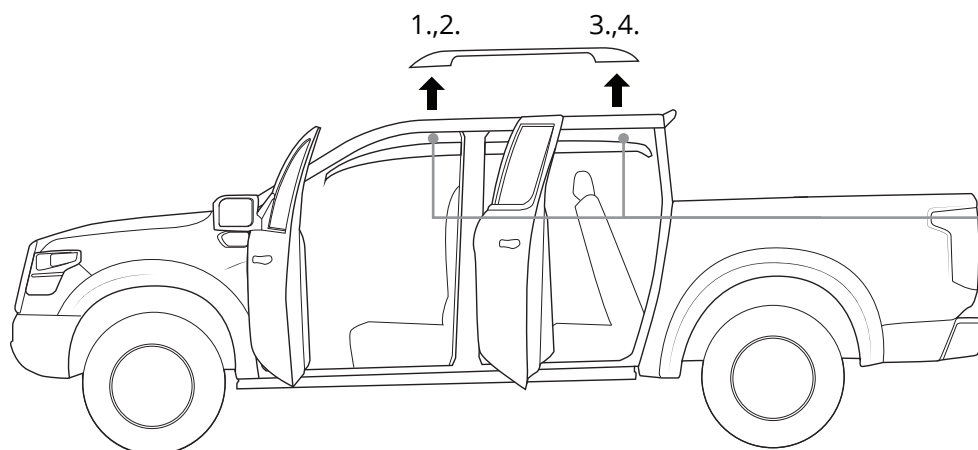


21

Move to the rear of gutter trim. Pinch the holes exposed where the factory rail was removed and lift upward.



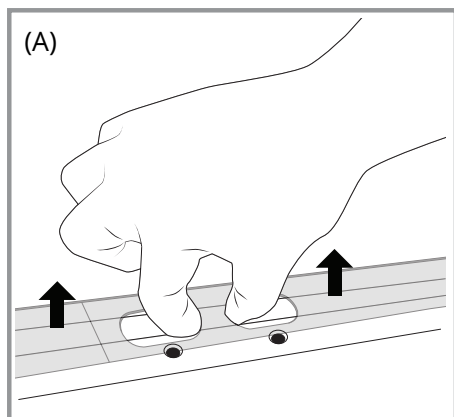


(B) With the gutter trim lifted, a clip holding the trim in place can be located at the rear of the vehicle. Carefully disengage.

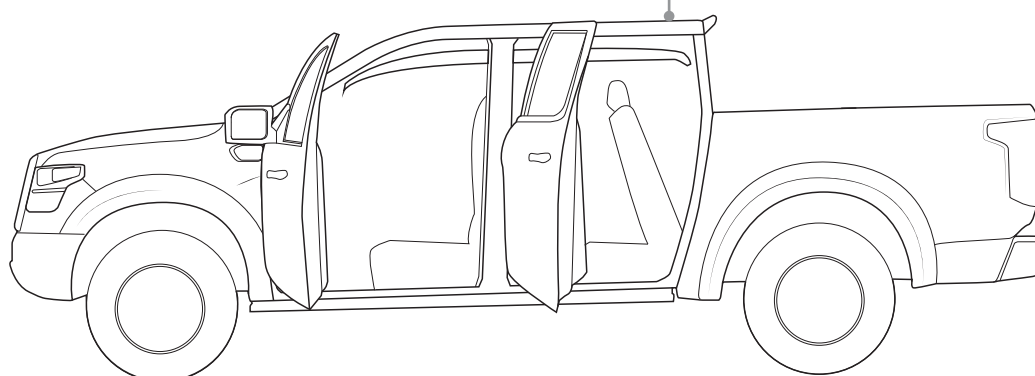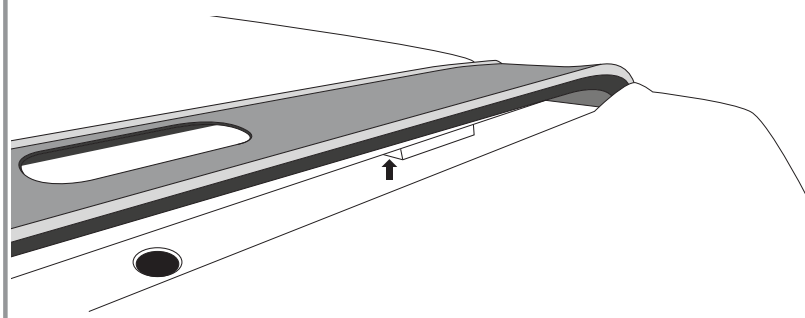


22

(A - OPTIONAL) Using butyl mastic, apply the sealant to all exposed holes in the roof.
(B) Add 2x butyl patches to the exposed threads in the roof.

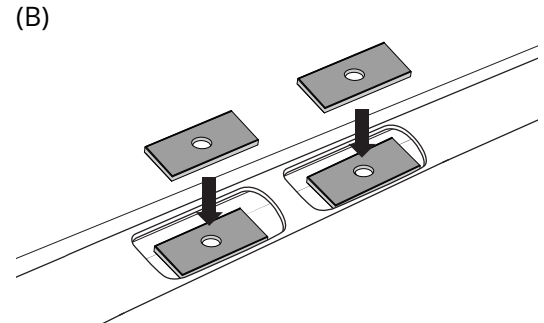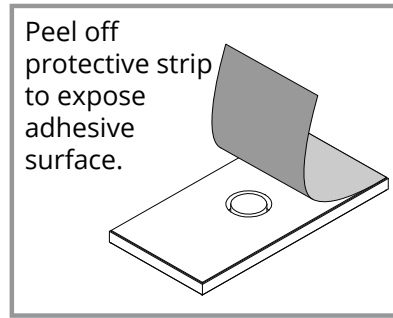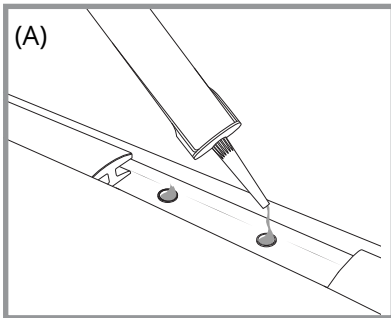


23

With the gutter trim clips released in step 20, there will be enough space to insert the spacers, sliding them carefully under the trim as shown.

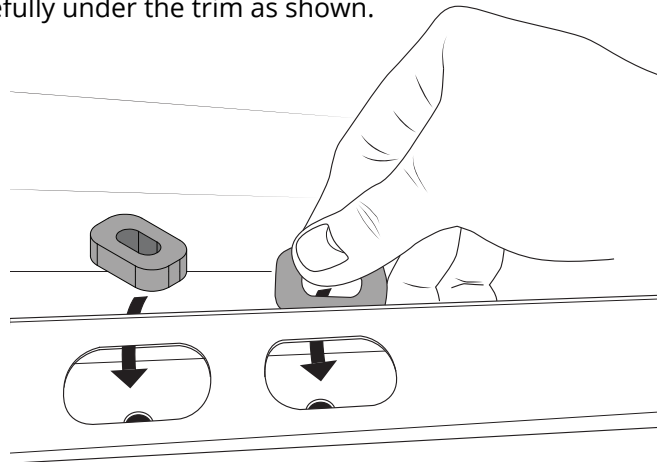


24

Install the M6 Ridge Mount hardware.

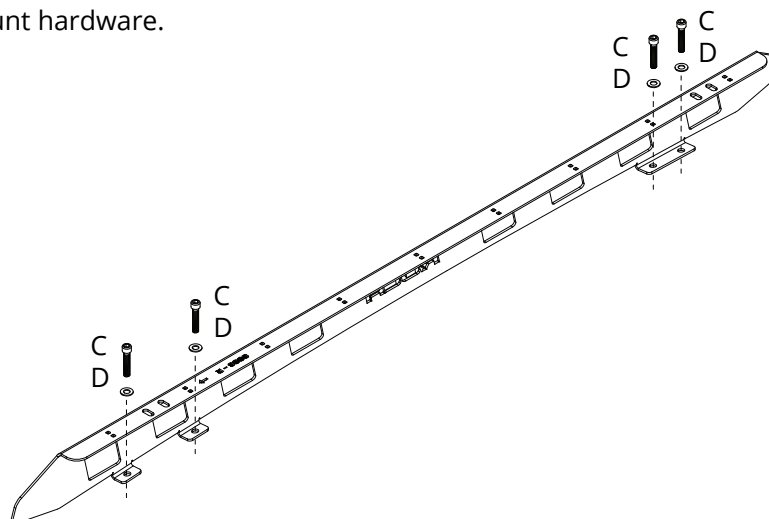




25

Install the stud plates front and rear.

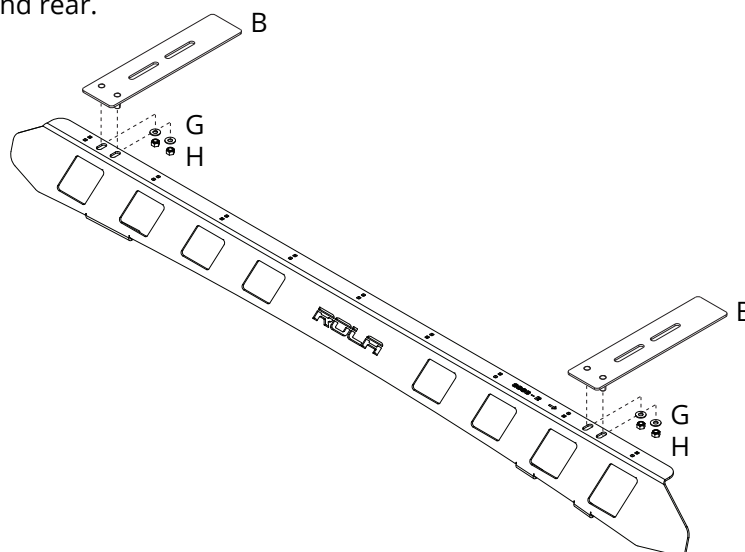


26

Install the Ridge Mount assemblies.

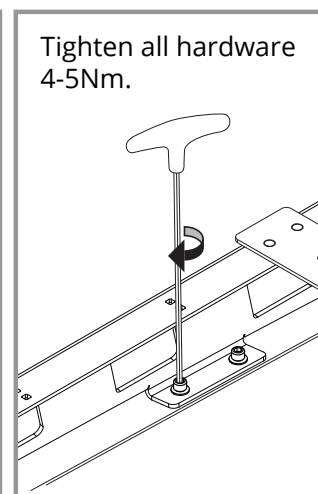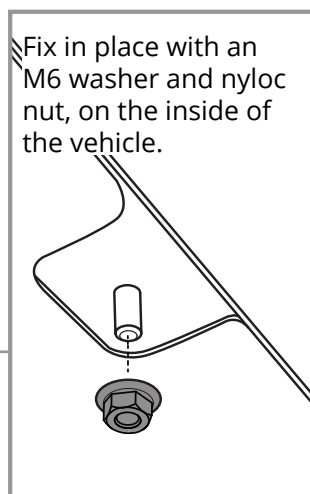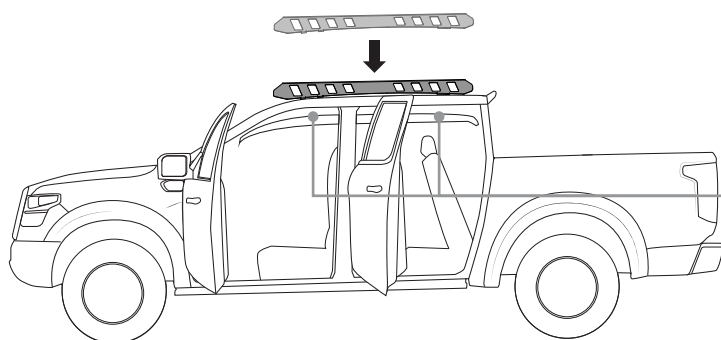

27



Re-install the roof liner by completing steps 18-2 in reverse.

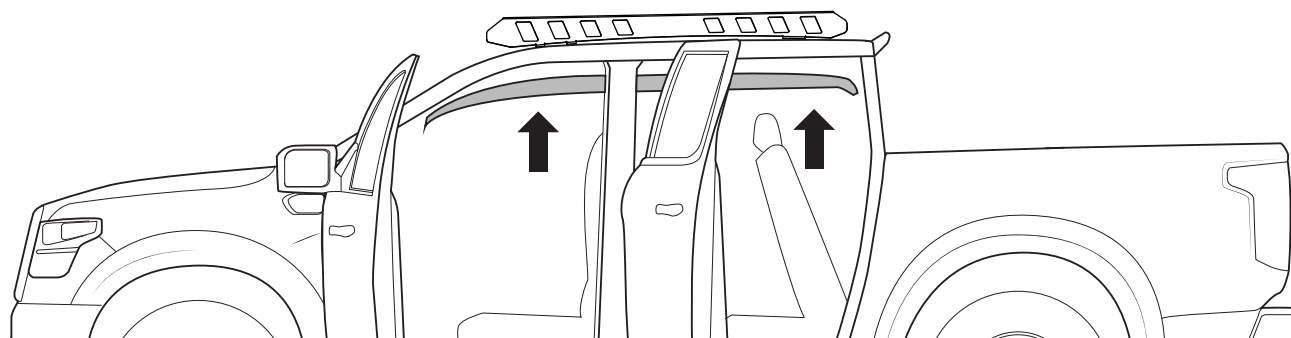


TITAN TRAY FITMENT

28


Install the Rola Titan Tray as per corresponding instructions.

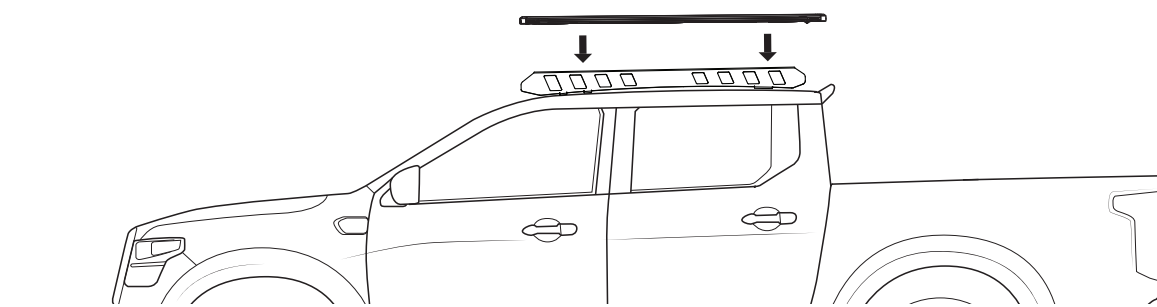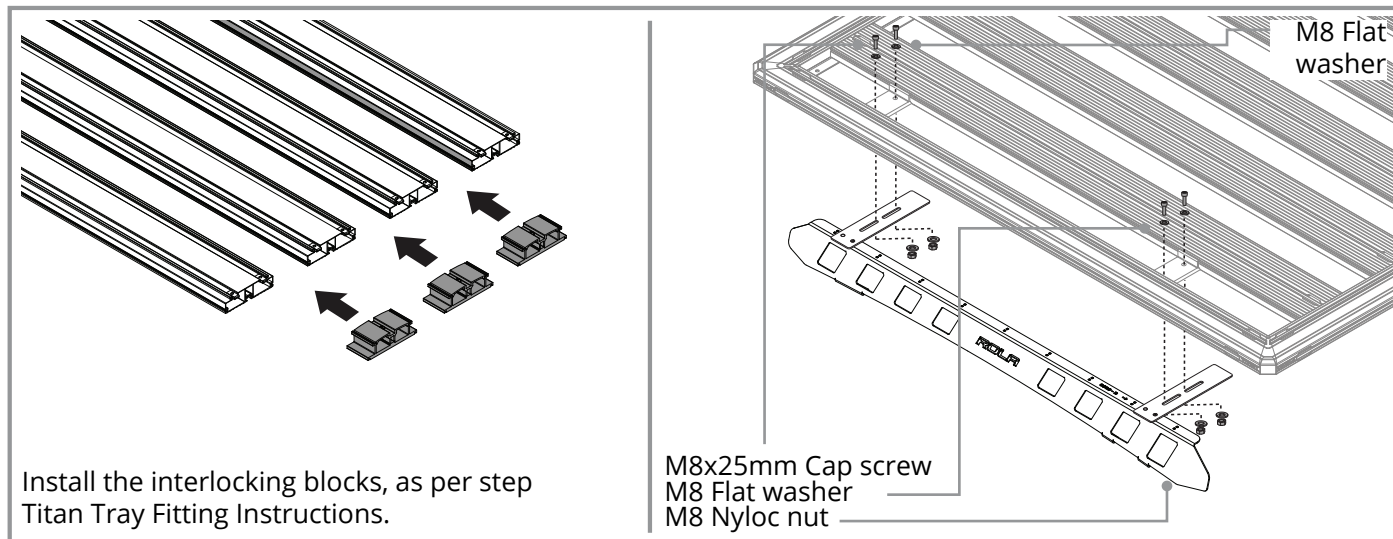

Note:

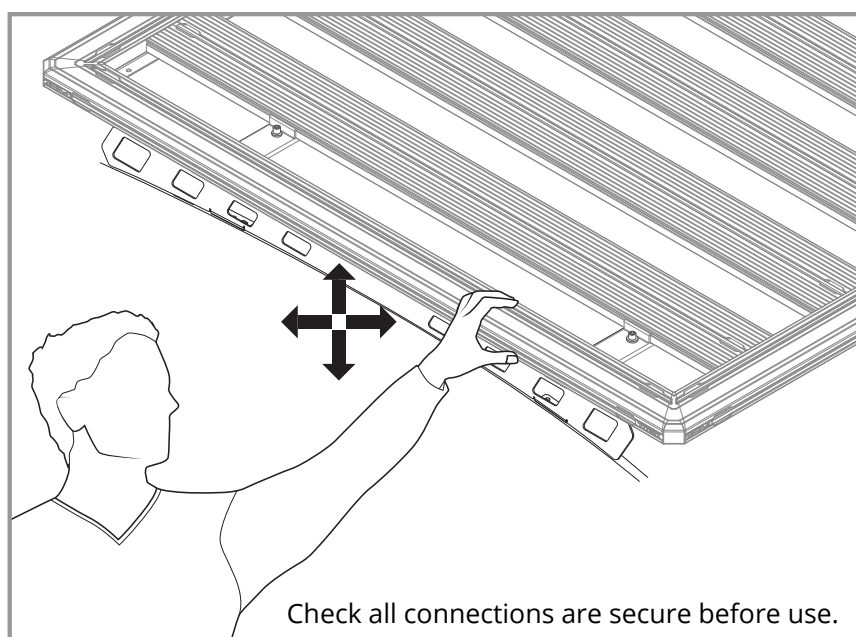

Wiring can be run and secured on the underside of the Ridge Mount rail as shown.

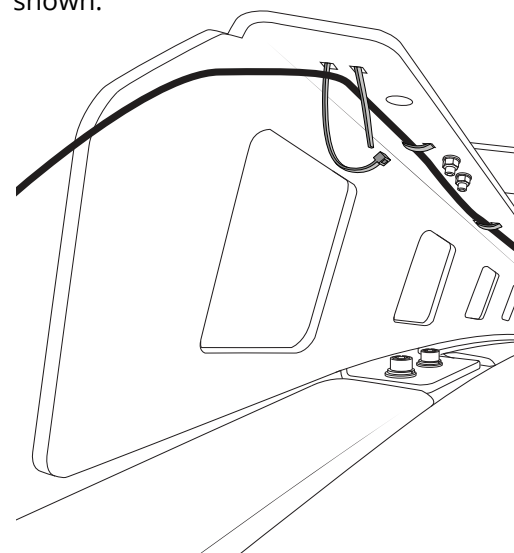

IMPORTANT - READ BEFORE USE

Please ensure the system is fitted in accordance with the fitting instructions. It is important that you observe all outlined below.



LOAD RECOMMENDATIONS

- Routinely and regularly check the proper functioning of the system. Check all fixtures at regular intervals.
- Do not use an automatic carwash with system installed.
- Maximum load capacity of the system is 400kg under static conditions.
- Maximum load capacity of the system is 100kg under dynamic including off-road conditions.
- Do not exceed vehicle manufacturers recommended load rating if it is lower than the maximum load capacity specified in this document (i.e., 100kg).
- Ensure any load carried is evenly distributed.
- Actual load on vehicle Roof (Refer to owner's manual) = Weight of Roof rack system / Ridge Mount + Weight of Tray + Weight of cargo.
- Actual load on rack system (Refer to product instructions) = Tray weight + cargo.

WARRANTY INFORMATION

Rola warrants that, subject to exclusions and limitations below, the Ridge Mount system will be free from defects in materials and workmanship for a period of 5 years commencing on the date of sale by the authorized Rola stockist to the original purchaser of the system.

If a defect appears in the Ridge Mount system before the end of the warranty period and Rola finds that the defect is in materials or workmanship, Rola will, in its sole discretion, either:

1. Repair the Ridge Mount or the defective component of the Ridge Mount system free of charge
2. Replace the Ridge Mounts or the defective component of the Ridge Mount system; or
3. Refund the purchase price of the Ridge Mount system to the original purchaser.

Rola reserves the right to change the design, specifications or composition of the Ridge Mount system without notice and without liability.

Rola reserves the right to replace defective products or components with products or components of similar quality, grade and composition, where an identical product or component is not available. Goods presented for repair may be replaced by refurbished goods of the same type rather than being repaired. Refurbished parts may be used to repair the goods.

The 5 year warranty does not apply where:

1. The Ridge Mount system is not installed in compliance with the fitting instructions provided
2. The Ridge Mount system is not used as intended or designed
3. Any part of the Ridge Mount system is used with other products or components not intended to be used in conjunction with the Ridge Mount system
4. The Ridge Mount system has been on-sold or assigned by the original purchaser
5. The Ridge Mount system has been modified or repaired by someone other than Rola or an authorized Rola stockist
6. Rola cannot establish any fault after inspection of returned product
7. The Ridge Mount system has been subject to abnormal conditions, including fire, water, humidity, pressure, stress or similar
8. The defect in the Ridge Mount system has arisen due to abuse, misuse, neglect or accident
9. The defect in the Ridge Mount system has arisen due to the unlawful or unusual operation of the vehicle to which it is fitted
10. The defect in the Ridge Mount system has arisen due to the purchaser's failure to properly assemble, install, fit, maintain or use the Ridge Mount system in accordance with the specifications and instructions provided by Rola.

For safety and use instructions, please refer to any General or Specific Fitting Instructions and Warning & Care Instructions enclosed within the Ridge Mount system or on our website at www.rola.com.au.

This warranty does not extend to fair wear and tear. Warranty claims can be made by contacting Rola directly using the details below. A warranty claim must be accompanied by proof of purchase (such as receipt), details of the alleged defect and appropriate documentation (such as historical and maintenance records where appropriate). The customer must make the product available to Rola or its authorized repair agent for inspection and testing. If such inspection and testing finds no defect in the product, the customer must pay Rola usual costs of service work and testing. It is the purchaser's responsibility to arrange and pay to return the product or component to the place of purchase. The purchaser may seek reimbursement from Rola for the cost of such activities, providing Rola notifies the purchaser in writing that a warranty claim is justified. Any such claims made must be in writing via post or email.

The benefits of this warranty are in addition to any rights and remedies imposed by Australian State and Federal legislation that cannot be executed. Nothing in this warranty is to be interpreted as excluding, restricting or modifying any State or Federal legislation applicable to the supply of goods and services which cannot be so excluded, restricted or modified. Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure. Rola makes no express warranties or representations other than set out in this warranty.