


R-JLAD-01 JL SIDE LADDER

PN	DESCRIPTION	QTY
1	TOP MOUNTING PLATE	1
2	LADDER BODY	1
3	M8x20mm FLANGE BUTTON SCREW	4
4	M8 SPRING WASHER	6
5	M8 FLAT WASHER	12
6	M8 CHANNEL NUT	6
7	SMALL MAGNET BRACKET	1
8	LARGE MAGNET BRACKET	1
9	M8x45mm SOCKET HEAD SCREW	2
10	M8 SPACER WASHER	2
11	M8 NYLOC	4
12	ANTI ABRASION TAPE	1
13	M8x25mm FLANGE BUTTON SCREW	2
14	FOAM BLOCK	4

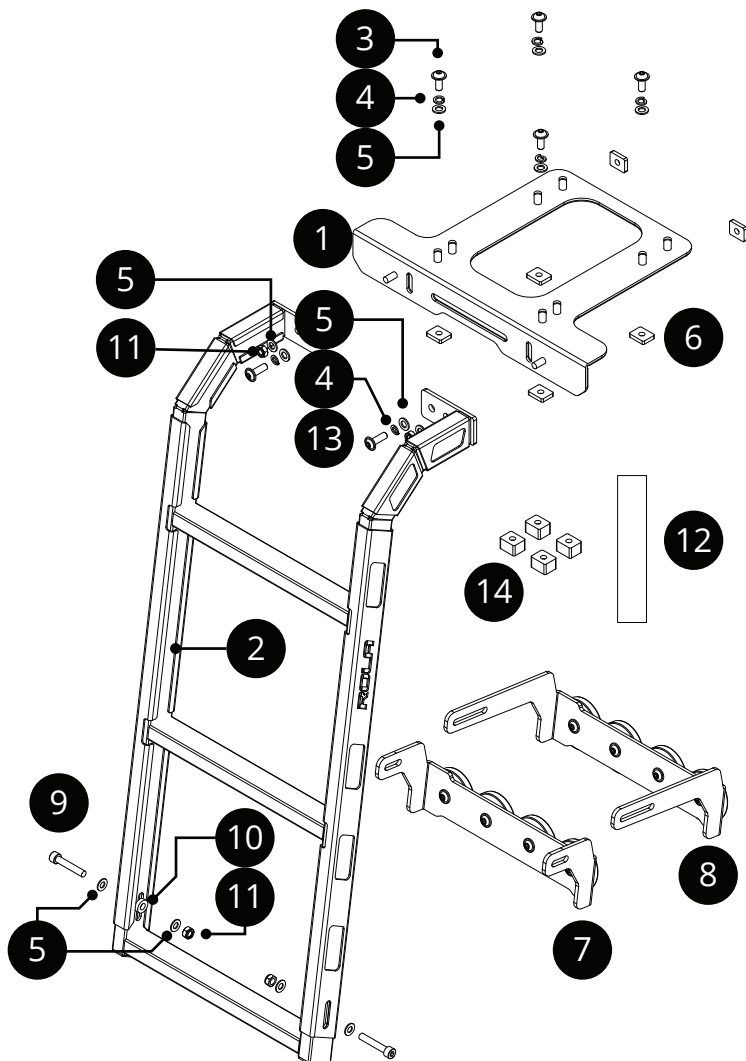

Product intended for fitment to Jeep Wrangler JL and 1300mm Titan Tray.
Compatible with Rhino-Rack and Yakima platforms.
Ensure fasteners are secure before use.

Tools required

- 5mm hex wrench
- 6mm hex wrench
- 13mm spanner
- Clean cloth
- Ladder


5
YEARS
WARRANTY

For full warranty details refer to the
website: www.rola.com.au



1



Choose the installation side for the system.
Thoroughly clean the chosen vehicle surface with a clean cloth to remove all dirt and debris.

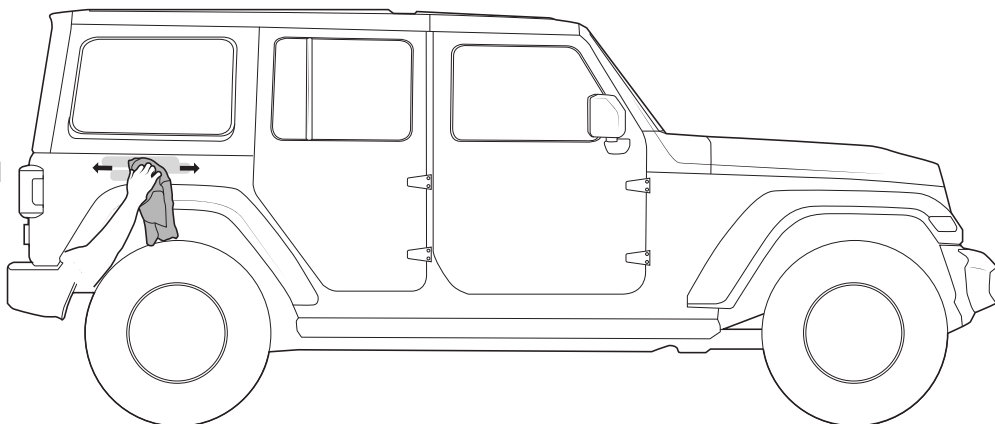


R-JLAD-01 JL SIDE LADDER

- 2** Fit the anti abrasion tape to the vehicle. Centre the tape above the wheel guard.

Situate the tape 10-20mm above the wheel arch.

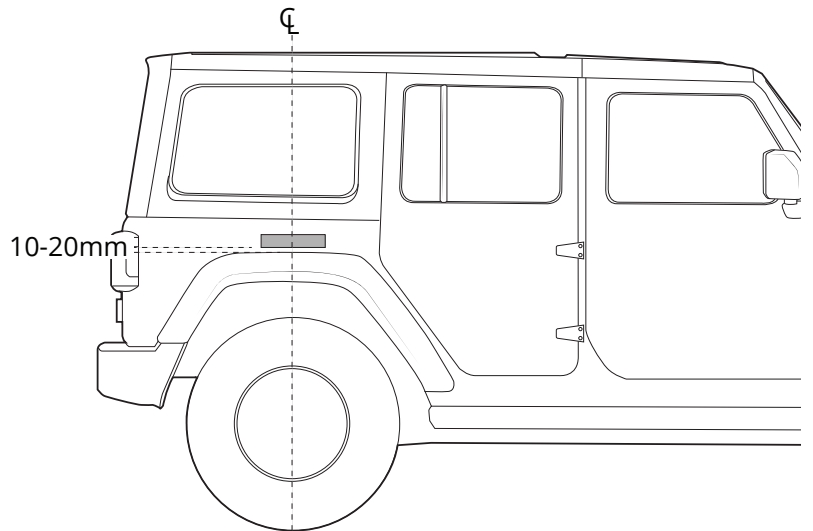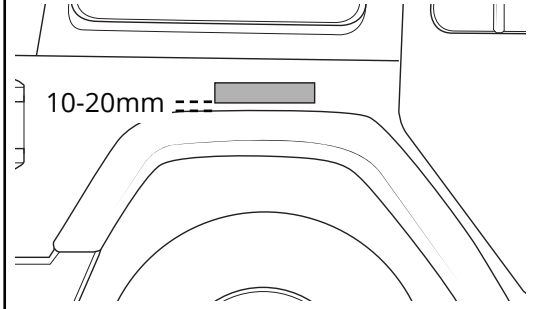


- 3** Assemble the top mounting plate and ladder, using a 13mm spanner and M8 hardware provided.

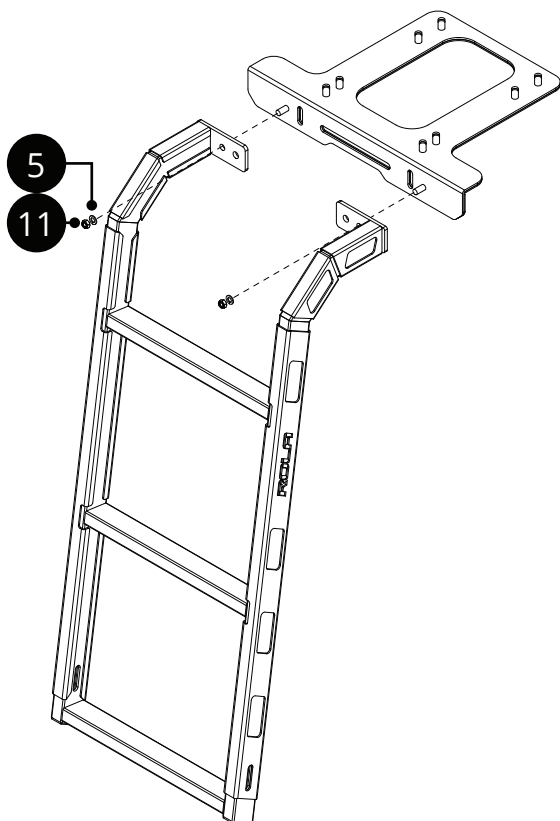


Torque: 15-20Nm.

- 4** Fit the appropriate magnetic bracket as shown.

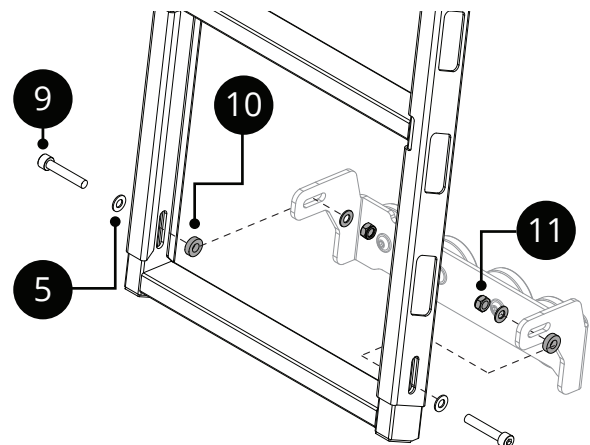

Small bracket - Suitable for Rola 1300mm Titan Tray


Large bracket - Suitable for Rhino-Rack and Yakima platforms



R-JLAD-01 JL SIDE LADDER

5


Slide the channel nuts into the plank channels shown. Be aware of the differences in tray / platforms.

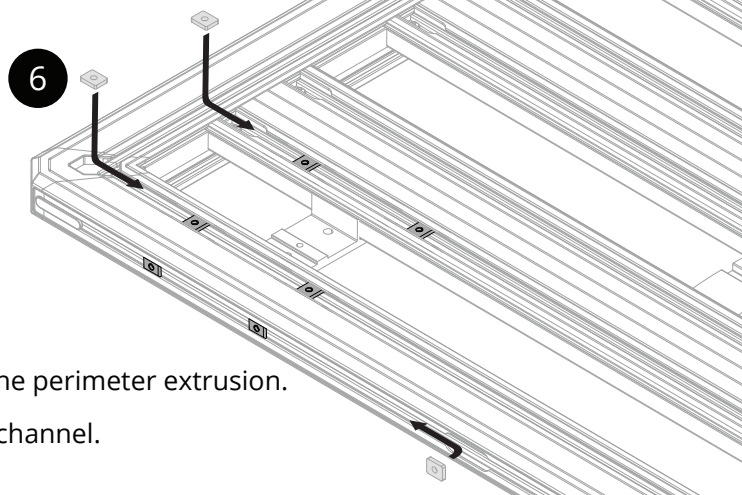

Slide 2x channel nuts into the side and top of the perimeter extrusion.

Slide 2x channel nuts into the first inner plank channel.



ROLA

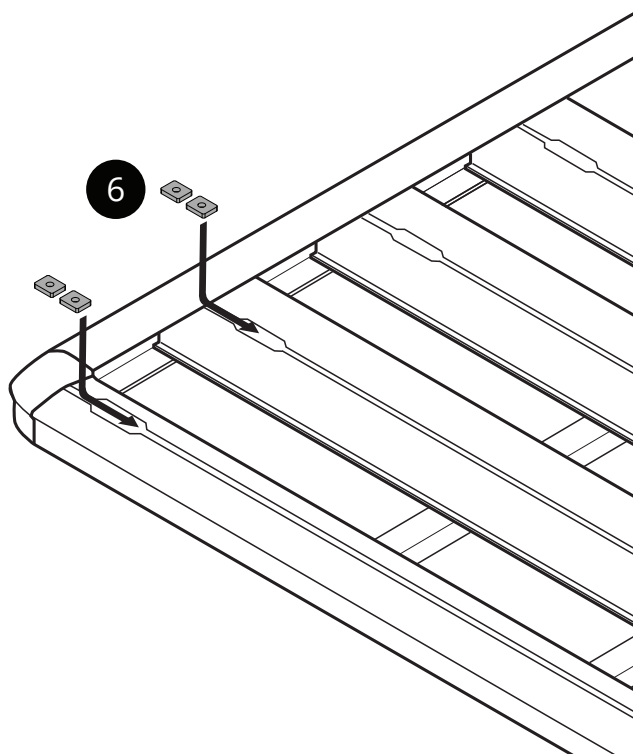

Slide 2x channel nuts into the side and first plank of the platform.

RHINO-RACK

Remove the backing tape of the foam supplied and attach to the channel nuts.

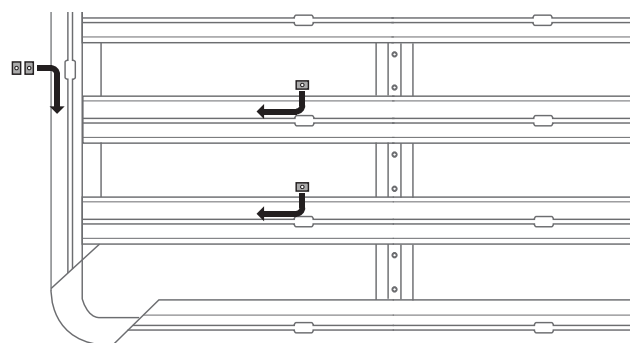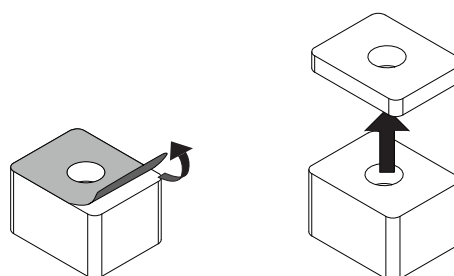

Slide a single channel nut into two planks that are side by side.


Slide 2x channel nuts into the outer extrusion.

YAKIMA

R-JLAD-01 JL SIDE LADDER

6


Fix the ladder assembly to the rooftop tray or platform as shown. Finger tight the fasteners only at this stage.

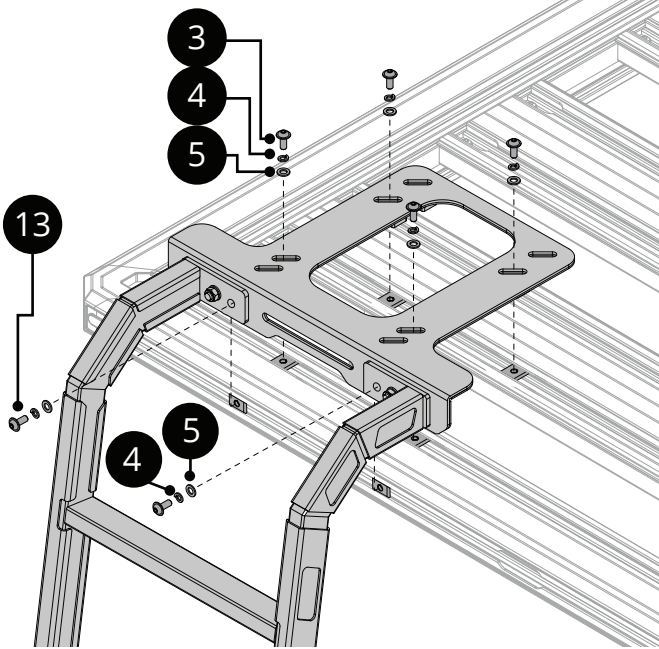

Side fixture for Rola Titan Tray only.

7


Align the ladder assembly, ensuring the magnetic bracket sits on the tape from Step 2. Tighten the top plate fasteners with a 5mm hex wrench.

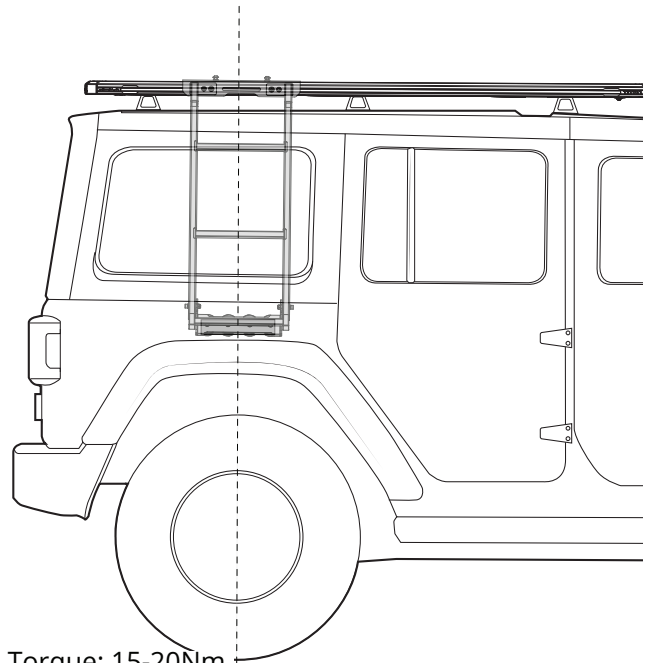

Torque: 15-20Nm.

8

Adjust the magnetic bracket to follow the contour of the vehicle. Secure it by tightening with a 13mm spanner and 6mm hex wrench.

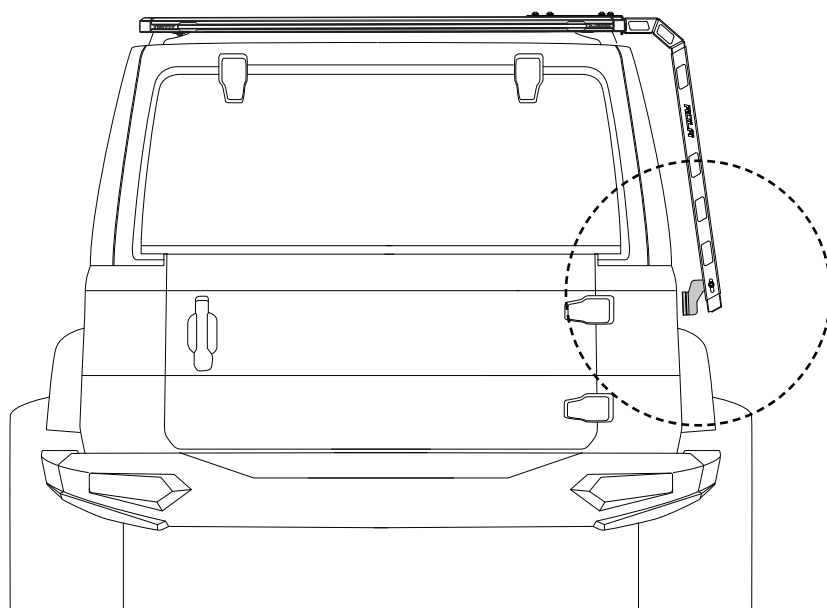



IMPORTANT - READ BEFORE USE

Please ensure the system is fitted in accordance with the fitting instructions. It is important that you observe all outlined below.



WARRANTY INFORMATION

Rola warrants that, subject to exclusions and limitations below, the system will be free from defects in materials and workmanship for a period of 5 years commencing on the date of sale by the authorised Rola stockist to the original purchaser of the system.

If a defect appears in the system before the end of the warranty period and Rola finds that the defect is in materials or workmanship, Rola will, in its sole discretion, either:

1. Repair the system or the defective component of the system free of charge
2. Replace the system or the defective component of the system; or
3. Refund the purchase price of the system to the original purchaser.

Rola reserves the right to change the design, specifications or composition of the system without notice and without liability.

Rola reserves the right to replace defective products or components with products or components of similar quality, grade and composition, where an identical product or component is not available. Goods presented for repair may be replaced by refurbished goods of the same type rather than being repaired. Refurbished parts may be used to repair the goods. The 5 year warranty does not apply where:

1. The system is not installed in compliance with the fitting instructions provided
2. The system is not used as intended or designed
3. The system has been on-sold or assigned by the original purchaser
4. The system has been modified or repaired by someone other than Rola or an authorised Rola stockist
5. Rola cannot establish any fault after inspection of returned product
6. The system has been subject to abnormal conditions, including fire, water, humidity, pressure, stress or similar
7. The defect in the system has arisen due to abuse, misuse, neglect or accident
8. The defect in the system has arisen due to the unlawful or unusual operation of the vehicle to which it is fitted
9. The defect in the system has arisen due to the purchaser's failure to properly assemble, install, fit, maintain or use the system in accordance with the specifications and instructions provided by Rola.


For safety and use instructions, please refer to any General or Specific Fitting Instructions and Warning & Care Instructions enclosed within the system or on our website at www.rola.com.au.

This warranty does not extend to fair wear and tear. Warranty claims can be made by contacting Rola directly using the contact details on the website. A warranty claim must be accompanied by proof of purchase (such as receipt), details of the alleged defect and appropriate documentation (such as historical and maintenance records where appropriate). The customer must make the product available to Rola or its authorised repair agent for inspection and testing. It is the purchaser's responsibility to arrange and pay to return the product or component to the place of purchase. The purchaser may seek reimbursement from Rola for the cost of such activities, providing Rola notifies the purchaser in writing that a warranty claim is justified. Any such claims made must be in writing via post or email.


The benefits of this warranty are in addition to any rights and remedies imposed by Australian State and Federal legislation that cannot be excluded. Nothing in this warranty is to be interpreted as excluding, restricting or modifying any State or Federal legislation applicable to the supply of goods and services which cannot be so excluded, restricted or modified. Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure. Rola makes no express warranties or representations other than set out in this warranty.

SAFETY REQUIREMENTS

Manufactures roof weight limit - rack system weight = Max carrying capacity.

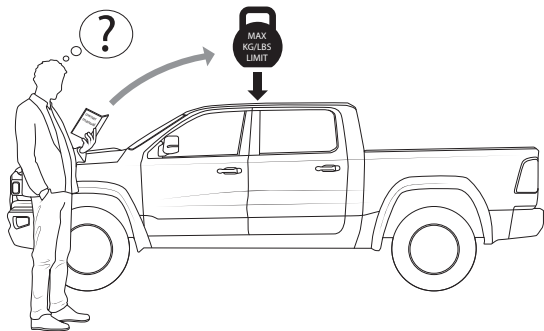


Cross reference with system max carrying capacity. **Always use the lower of the two figures.**

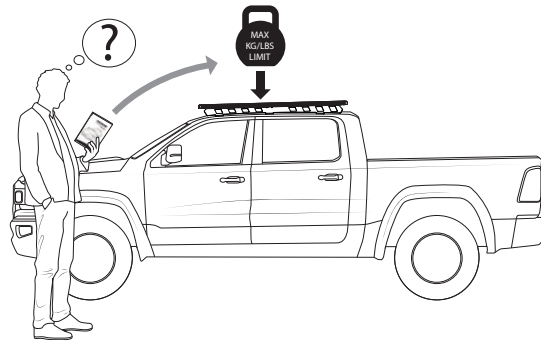

IMPORTANT - Off-road load rating reduction.


System	Track Mount	Anchor Point	Gutter Mount	Raised Rail	Flush Rail	Clamp Mount
Tray + Ridge Mount	0%	0%	25%	0%	N/A	N/A
Tray + Low Mount	33%	33%	33%	33%	33%	50%
Sports Extended	33%	33%	33%	33%	33%	50%
Sports Concealed	33%	33%	33%	33%	33%	50%

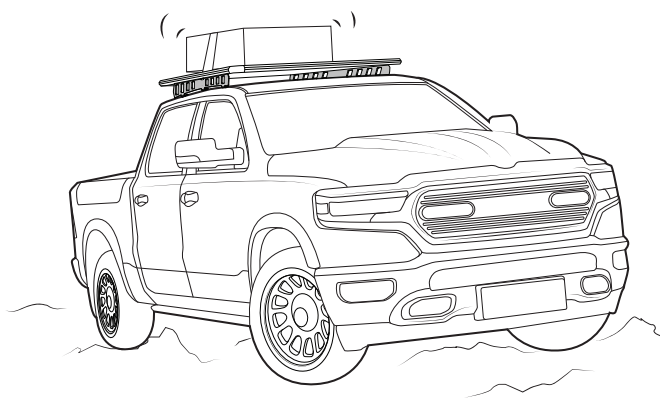



Distribute carried load evenly longitudinally and as low as possible.

Do not concentrate loads front or rear.


CORRECT






CORRECT




CORRECT

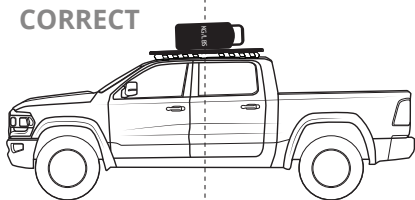

CORRECT

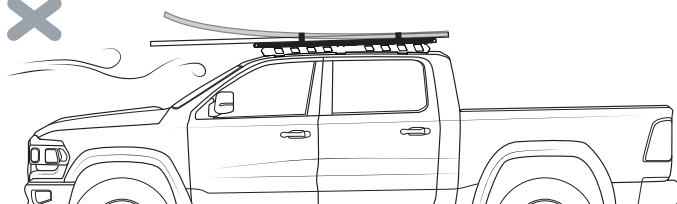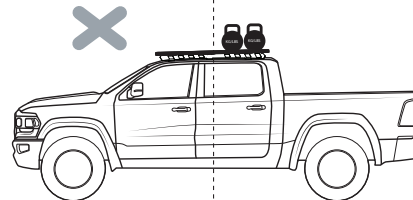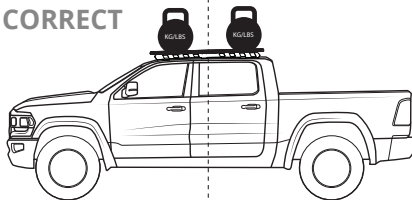


CORRECT

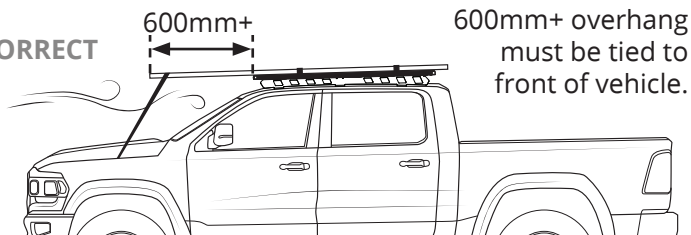


SAFETY REQUIREMENTS


(A)

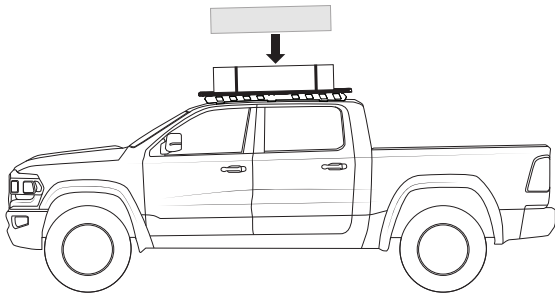



Check all fixtures are secured and torqued correctly.

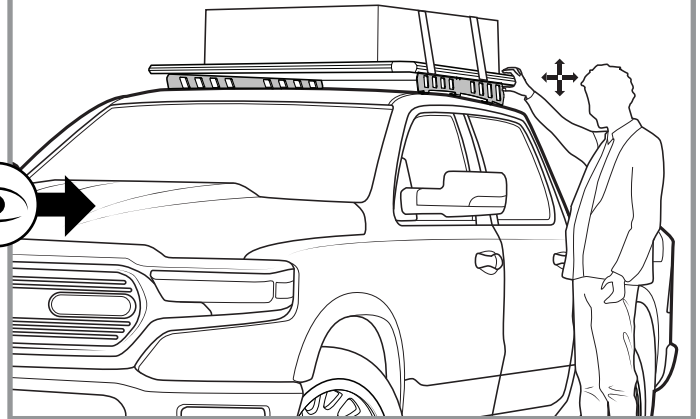

(B)


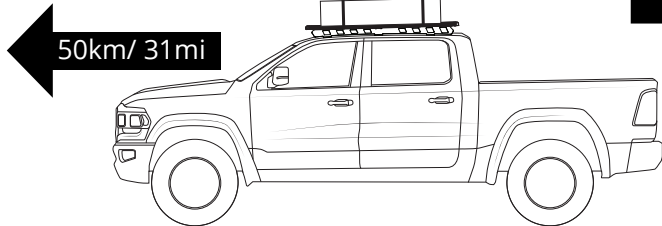


Check all fixtures are secured and torqued correctly.

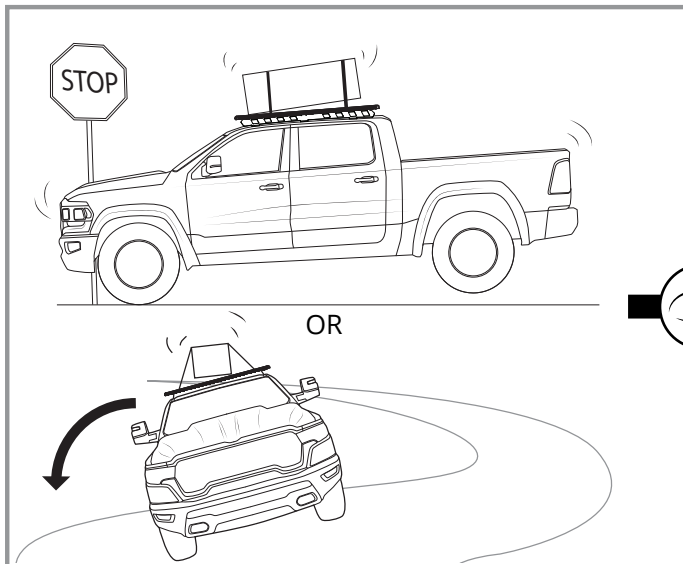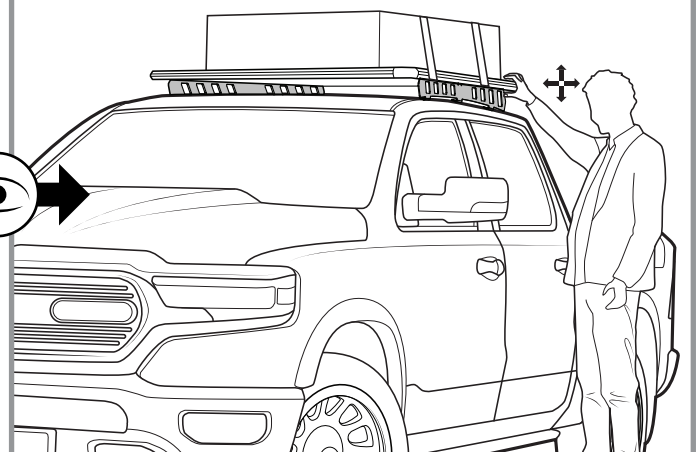


Cab and canopy can move independently, do not fix load across both.

Long loads fixed at front only.

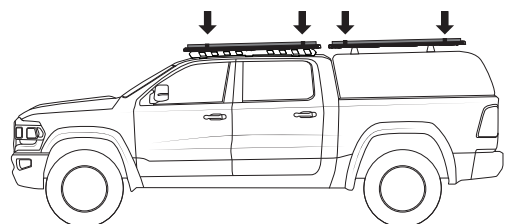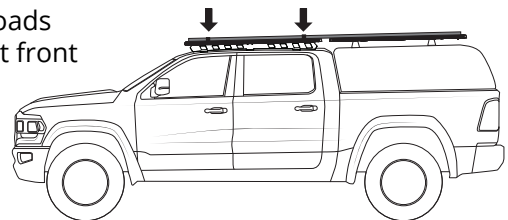

Do not use car-wash with roof rack systems.

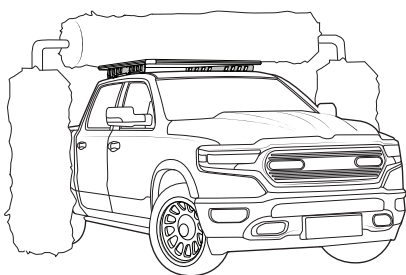

Be aware of adjusted vehicle height.

