

END SUPPORT (RIGHT) x2	END SUPPORT (LEFT) x2	MOUNT PAD (RIGHT) x2	MOUNT PAD (LEFT) x2	SNAP-ON COVER x4	SECURITY COVER x4	STRAP BRACKET x4	SCREW x4	SECURITY BOLT x4	SECURITY BOLT x4	ASSEMBLY KEY x1	CROSS-BAR ASSEMBLY x2
<b>SOME FITMENTS MAY ALSO FEATURE THE FOLLOWING COMPONENTS:</b>				<b>Please Note: You will require the following tools</b>							
ANCHOR POINT BOLT x4	ALLEN KEY x1	BOTTOM STRAP BRACKET x4	BOLT COVER x4	Phillips Head Screwdriver    Flat Head Screwdriver    Rubber Mallet    Safety Knife							


#### ASSEMBLY OF CROSS-BARS

1. Ensure the roof is clean, free from dust and grease.
  2. Insert the neck of the End-Support into the void of the Cross-bar profile. They are designed to be a tight fit: use a rubber mallet if necessary (Fig.1)
  3. Pull back the rubber Buffer Strip about 20mm until the screw hole can be accessed.(Fig. 2) Using a Phillips Head Screwdriver, fasten the screw through the cross-bar and into the End Support.
- Do this for all four sides and replace the buffer strip.
- NOTE:** The longer cross-bars are to be fitted to the front of the vehicle. Check labelling on the underside of the cross-bar.

#### FITTING CROSS-BARS TO VEHICLE

4. On the vehicle roof you will find 6 Anchor points. Carefully remove the screw plugs from the roof with a small coin or screw driver, taking care no to scratch the paint work (Fig.4b).
- (**NOTE:** Remove the front and centre plugs for fitment of RM241 and the front and rear plugs for RM242). Keep the plugs in a safe place to re-install when the roof racks are removed and not in use.
5. Place the rubber pads over the threaded anchor points with the pointer end facing towards the front of the vehicle (Fig.5).
6. Place the appropriate crossbar assemblies onto the rubber pads.
- NOTE:** The longer crossbar is fitted to the front of the vehicle.
7. Loosely fit the M6 x 45mm special bolt with washer through the end support and bolt cover then into the anchor point. Give two or three turns of the special bolt in the anchor point with the security key provided. Go to the other side of the vehicle and pull on the end support and the fit same way. This will allow for correct alignment of the anchor point and special bolt threads (Fig.5).
8. Gradually tighten the bolts alternately until an even tensioning is achieved. A firm hand tightness is adequate for correct tension.
- DO NOT** overtighten the special bolts as this may result in roof damage.
9. Proceed to follow steps 5 to 8 when mounting the Rear Cross-bar Assy.
10. You are now ready to mount your "Accessories" set onto the cross-bars using the Global Mount Channel. Once installed, insert the 'Global Channel' Covers into the End Supports.

**NOTE:** You have a choice of 2 - (a) quick access snap-on cover or (b) long term mounting - security cover to cap off and lock the mount channel. (Fig. 6)

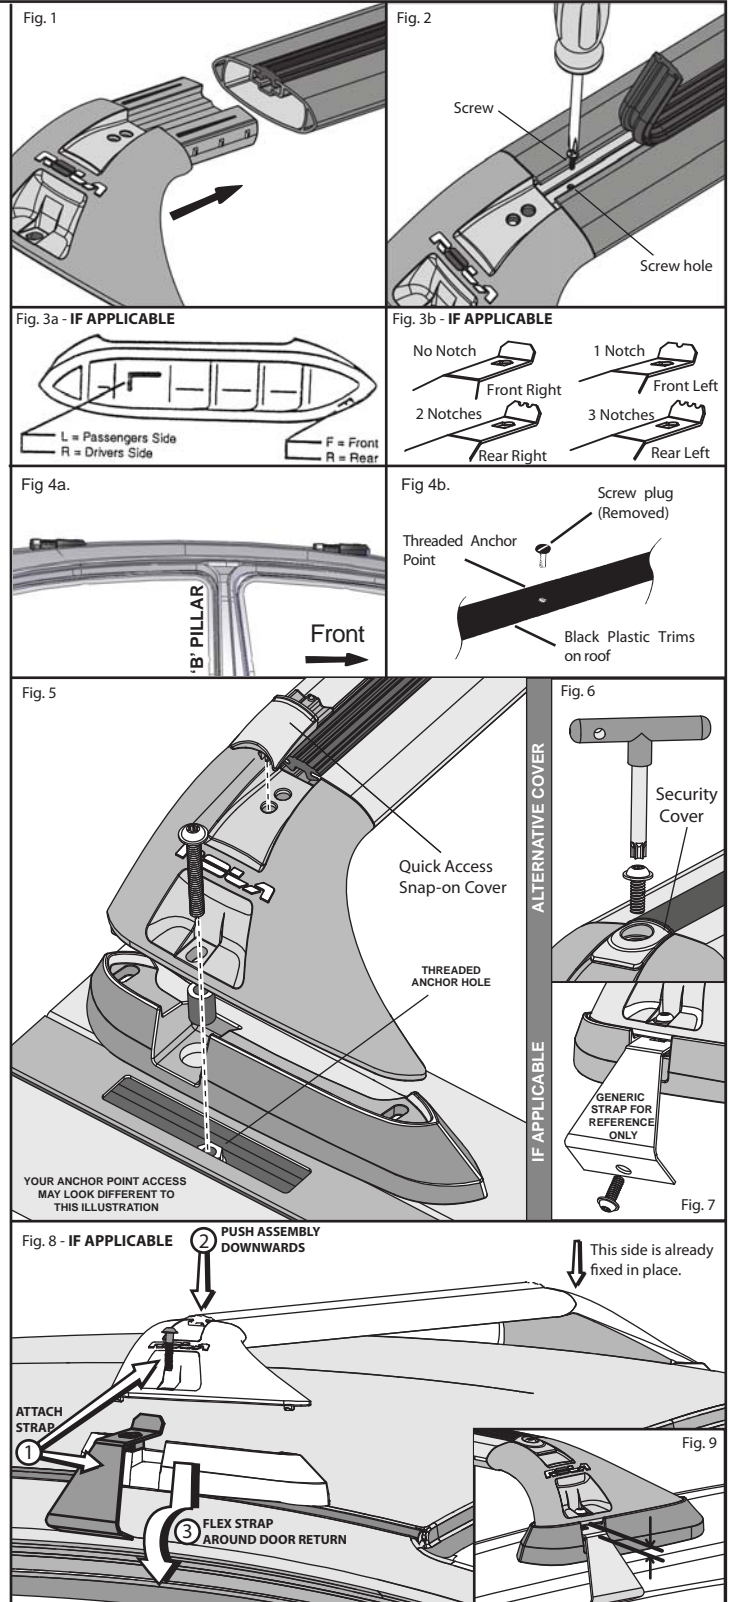

**General Usage Information**

It is essential for the proper assembly, operation and use of the Roof Rack that the instructions and safety precautions supplied are strictly observed. Read any fitting, care and usage instruction carefully.

The maximum permissible load for your Roof Bar is the lower of the maximum load capacity specified in your vehicle operation manual, or specified as applying to the Roof-Rack. Do not exceed the maximum specified load capacity.

Maximum permissible load = weight of the Roof Rack + weight of accessories + weight of load (cargo).

When fitting the Roof-Rack and transporting a load, ensure the vehicle's functions are not impaired (eg, sunroof, aerials, windscreen wipers, mirrors). Rear doors on Hatch- and Wagon-type vehicles should be inspected for adequate clearance for full opening operation of the boot/tailgate.

Stop and check all screw connections, bolts and retaining straps after a short distance of travel. Repeat these checks at regular intervals.

**Warnings**

Remember that the fitting of a Roof Rack and the transport of a load increases the overall height of the carrying vehicle.

Where the Roof-Rack is to be used in off-road conditions, a safety weight reduction of 1.5 should be observed from the total carrying capacity. (eg. 60kg becomes 40kg)

Cequent will not be liable to the purchaser or any other person for any consequential, incidental, direct or indirect loss, damage or costs incurred or suffered by the purchaser or any other person including but not limited to damage to persons or property, loss of turnover, loss of profits, loss of business or goodwill, arising from or in relation to the assembly and use of the Roof rack, or the non-observance of the fitting and care instructions.

**APPENDICES & ADDITIONAL 'FITMENT SPECIFIC' FITTING STEPS - IF REQUIRED**

This area has been intentionally left blank.