









RIDGE MOUNT

by **ROLA**®

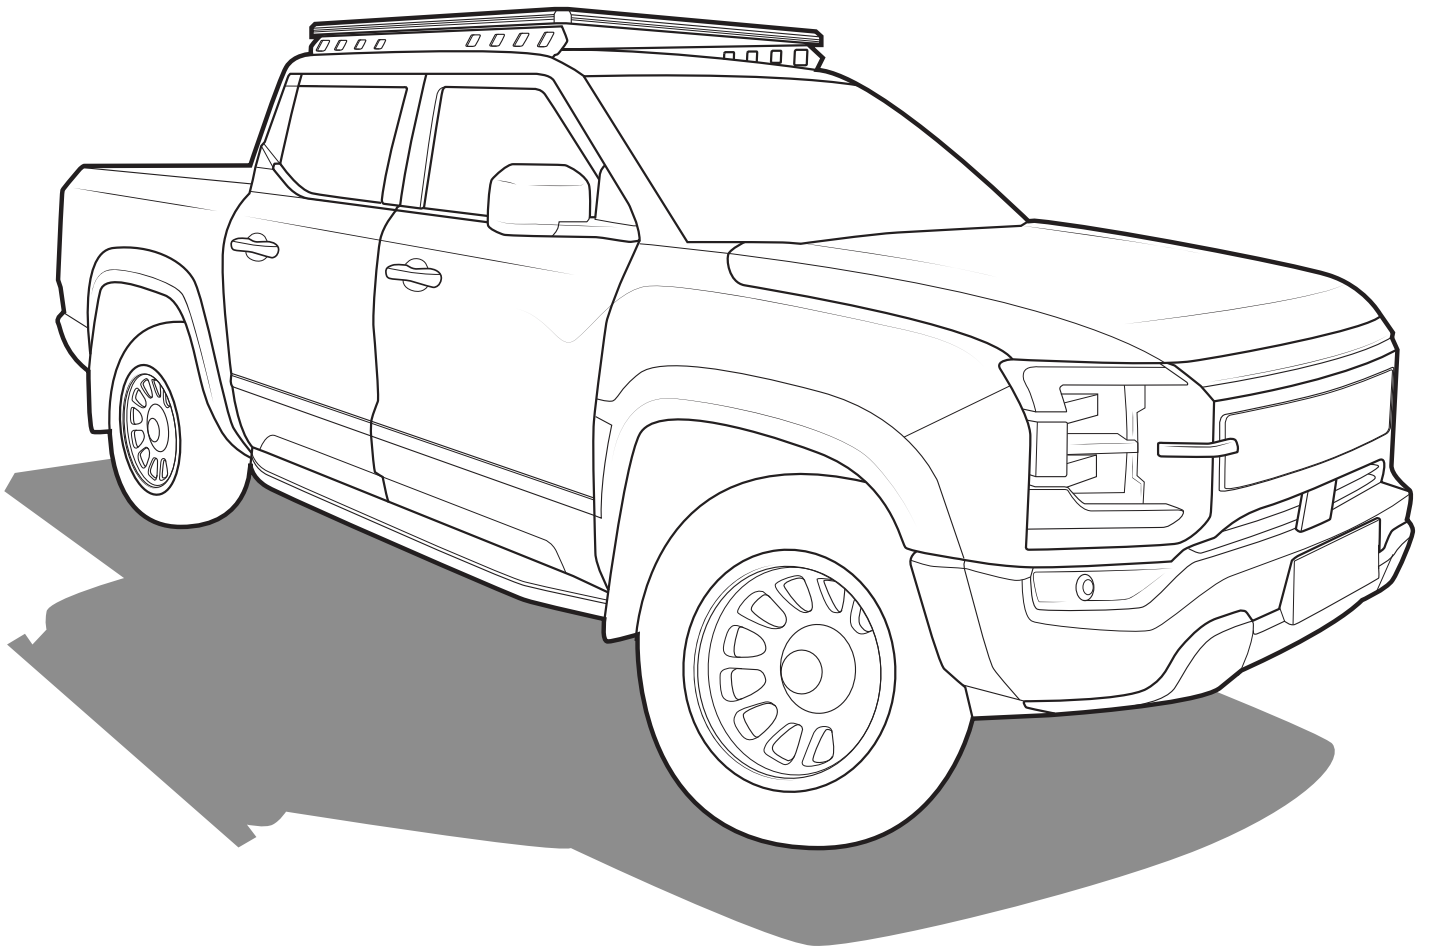

Read this full instruction prior to commencing assembly and fitment of Ridge Mount System.

CONTENT - CHECK ALL PARTS ARE CORRECT BEFORE PROCEEDING


A		Ridge Mount (pair)	1
B		Stud Plate	4
C		M8x25mm Socket Head Screw	16
D		M8 Washer	40
E		M8 Hex Nut	24
F		Butyl Patch	16
G		Interlocking Block	3

TOOLS REQUIRED

- 6mm allen tool.
- Socket wrench and set.
- Step ladder.
- Trim tools.
- Phillips head screwdriver.



1

Move to the side of the vehicle. Use a step ladder to get access to the vehicle.

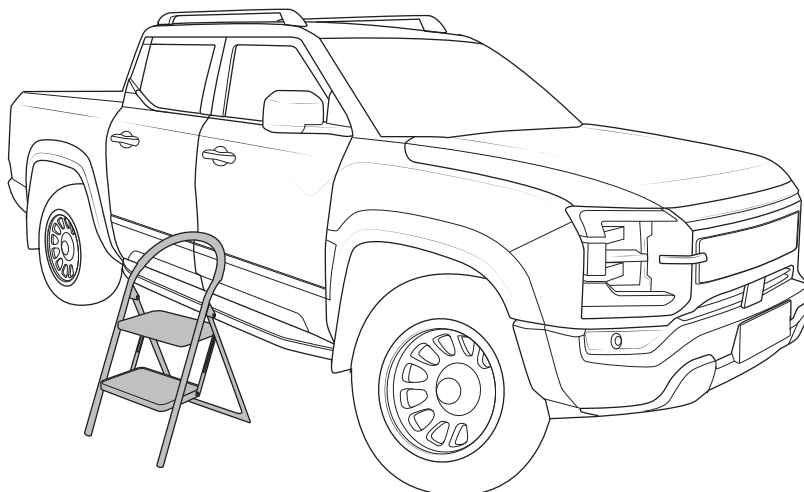


2

Gain access to the passenger side of the vehicle and start by removing the sun visor. Pry the cover out, unscrew the two Phillips head screws.

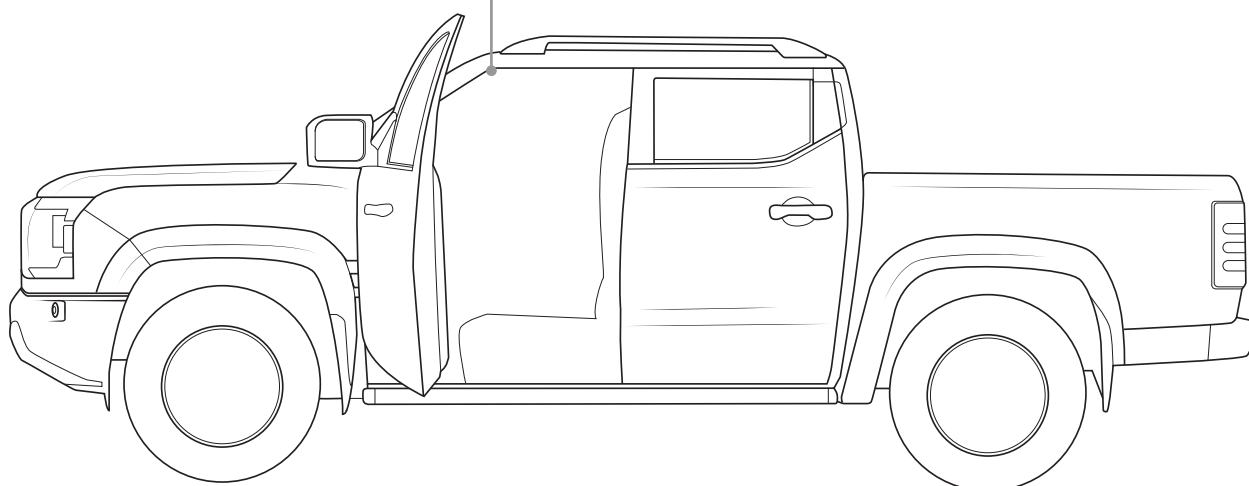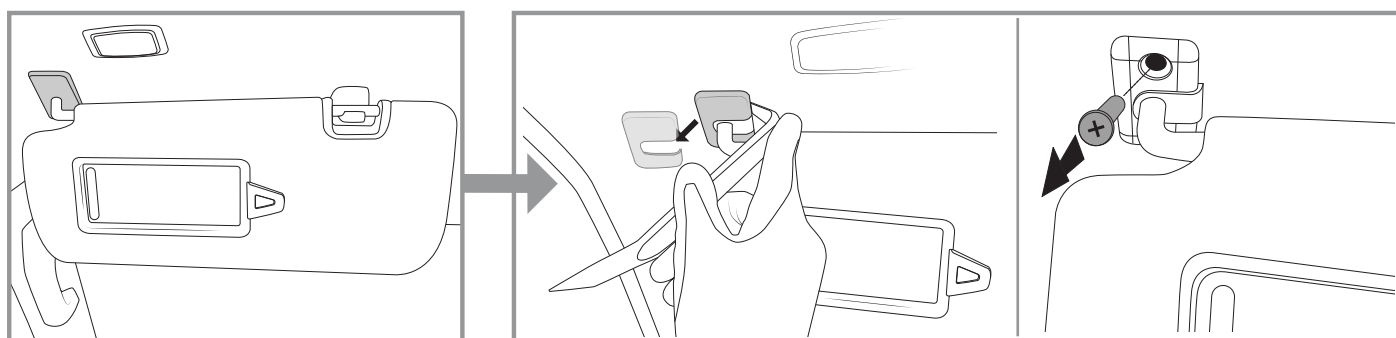



3

Disconnect the visor loom.

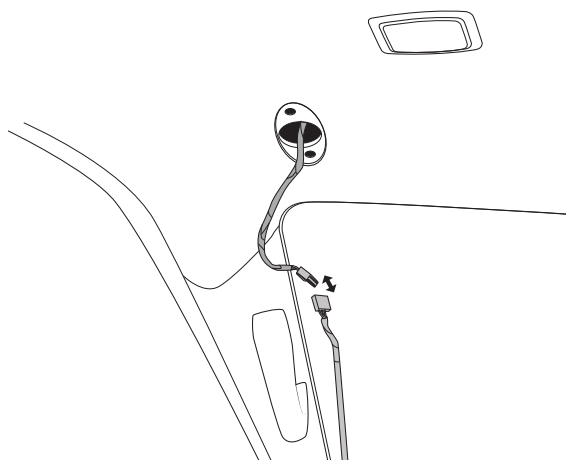



4

To remove the sun visor bracket, twist clockwise until locking tabs release. Pull the visor bracket free.

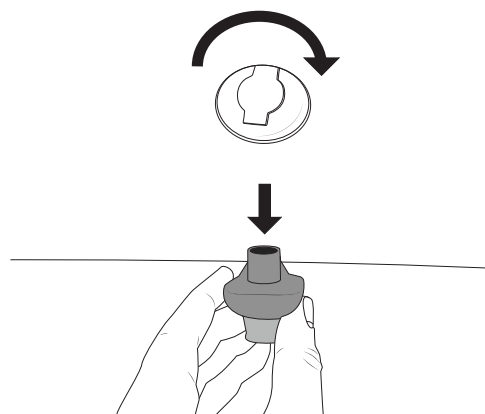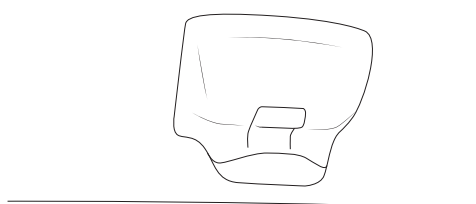


5

Remove the light above where the visors were located, by first prying on the edge to release it from the vehicle and then disconnecting the harness.

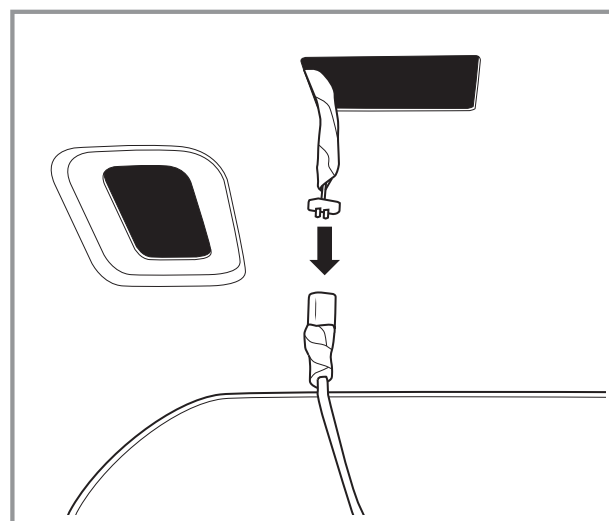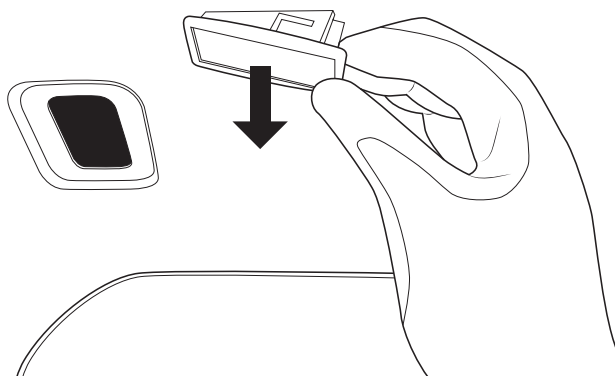



6

Remove the A-pillar handle by prying on the bottom edges of the handle covers. This will expose the hardware below, remove to detach the handle.

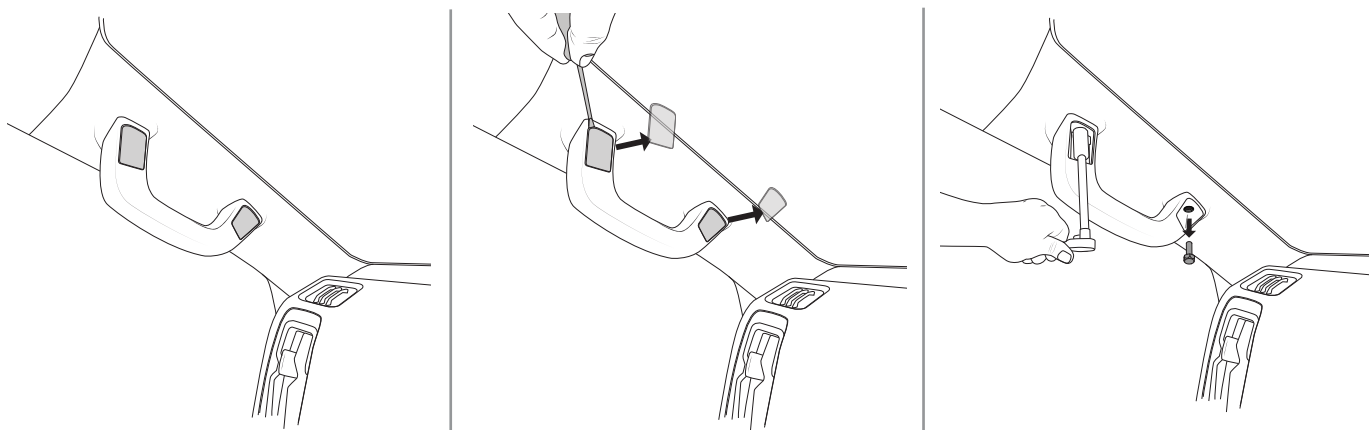



7

Now remove the centre sunglass holder, first open the sunglass holder, pry the covers open and release the two Phillips head screws.

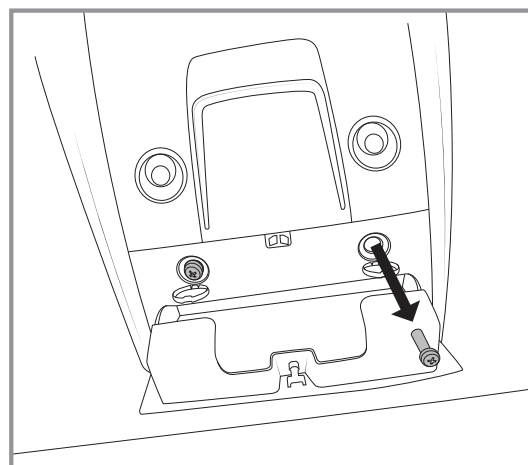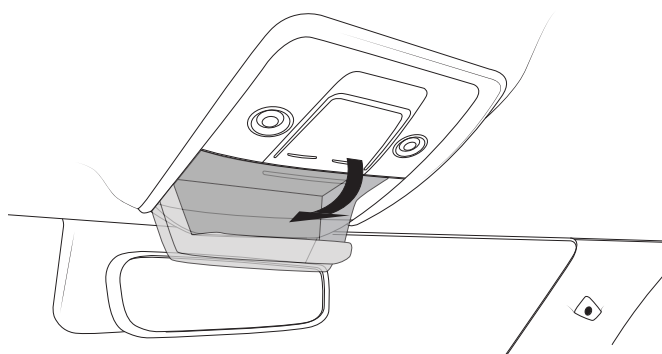



8

Pry from the back of the sunglass console to release the two metal clips and then disconnect the harness.

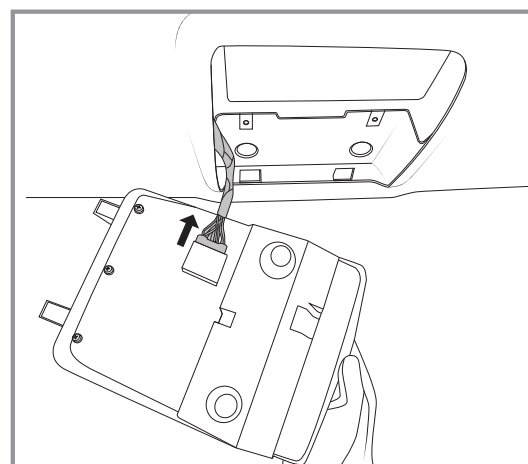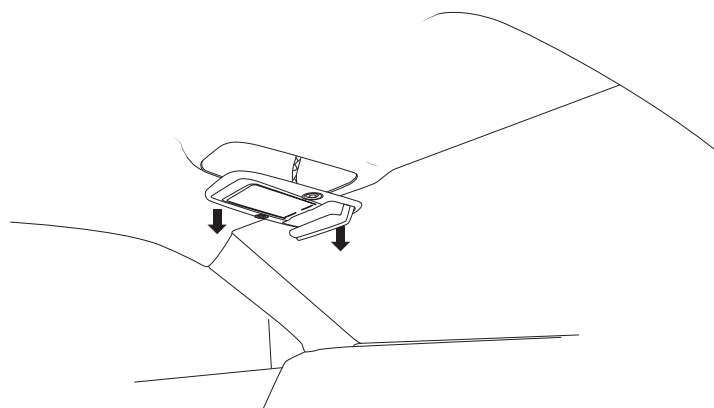


9

Remove the upper ceiling handle, pry on the two covers to reveal and remove the 8mm fasteners, repeat for other ceiling handles.

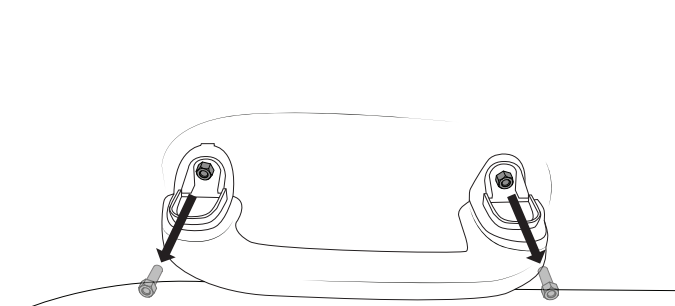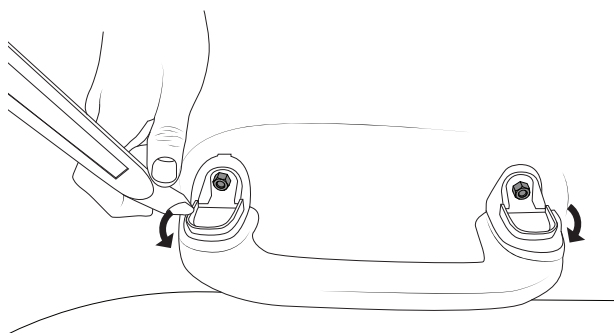


10

Then remove the speakers from ceiling, pry on the corners to release them.

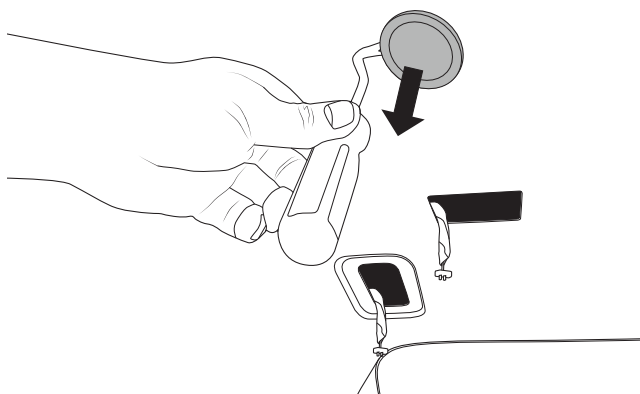


Remove the cover from the speaker by pushing on the corner of the cover.

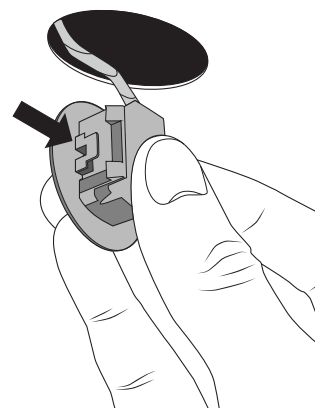


11

Carefully pry out the light at the rear of the vehicle in the ceiling.

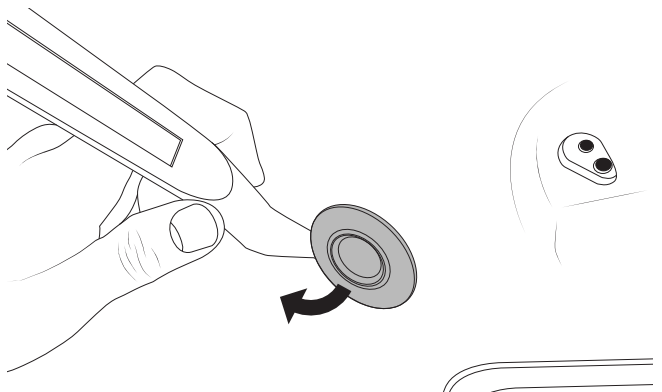


Release the harness to disconnect the light.

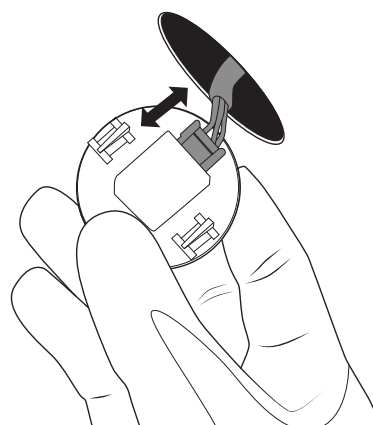


12

To remove the B-pillar grab handles, firstly pry the handle covers loose. Pull from the lower end of the top cover and the upper end of the bottom cover. Undo the exposed 8mm fasteners. The handle will now come free.

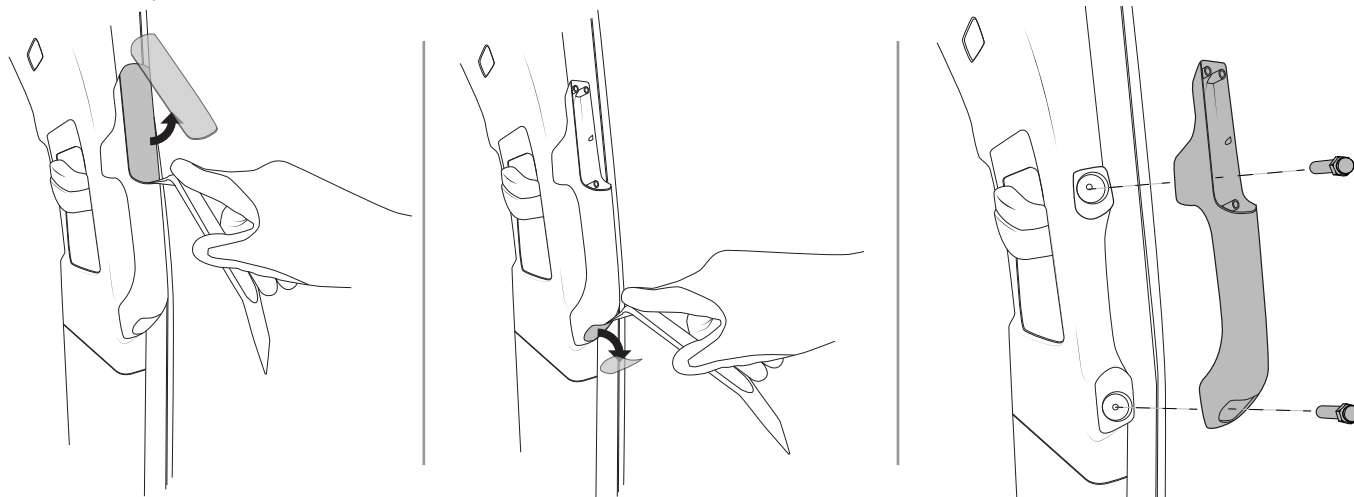


13

Move around the vehicle, carefully removing the door seals. Be aware that with the seal removed, grease will be exposed in these areas.

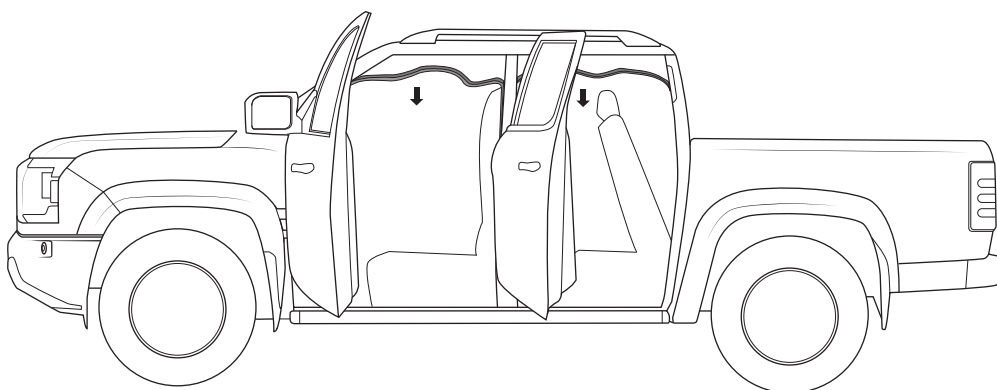



14

The A-pillar covers on both sides need to be removed. On the drivers side, pry from the outside inward as shown.

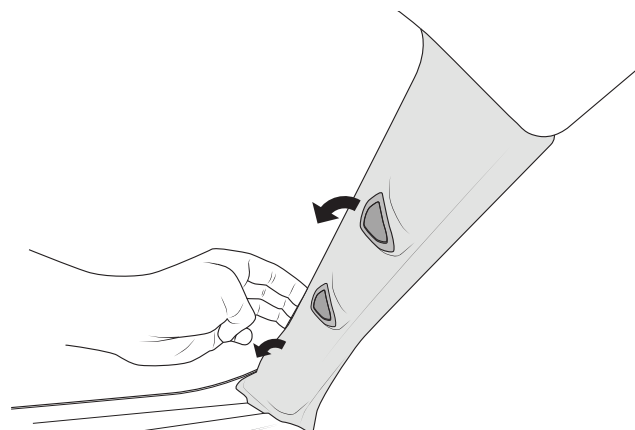



15

Start to pry the passenger side out in the same fashion. Once the side of the cover is released, pull the cover along the A-pillar. This will clear the clip holding the cover at its top end. Remove the cover.

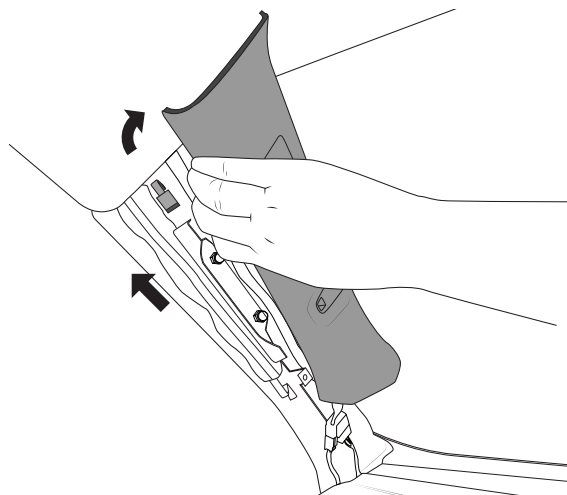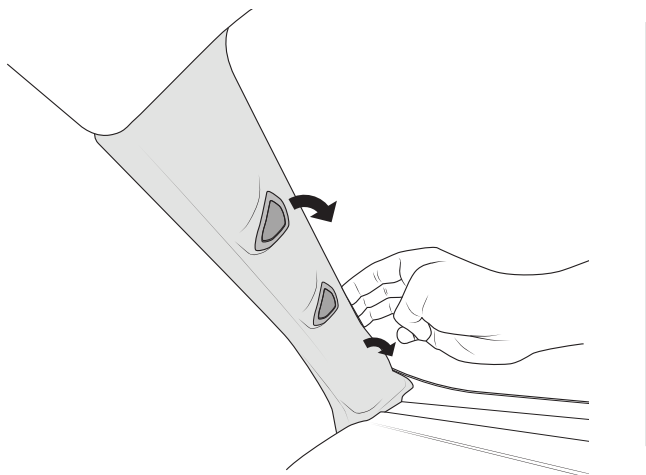


16

Move back to the upper B-pillar cover. Remove the airbag cover, expose and remove the 10mm hardware below.

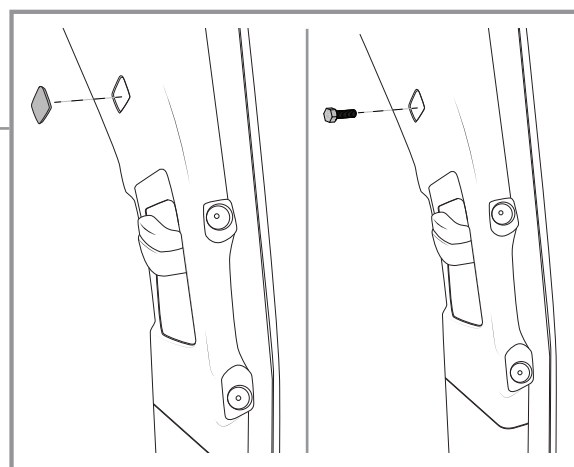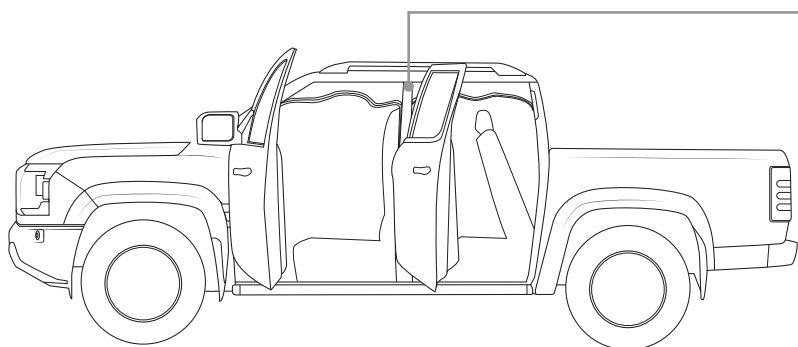


17

Pry the outer parts of the bottom B-pillar and release the clips fixing it in place, this will expose hardware on the upper B-pillar.

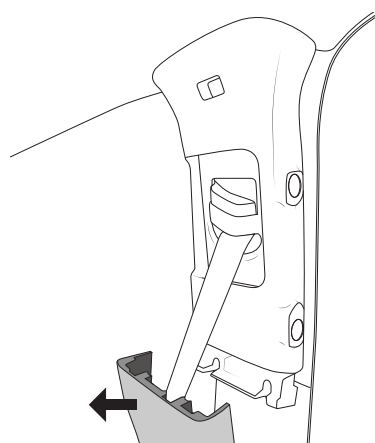



18

Remove the newly exposed hardware. Drop the upper B-pillar cover.

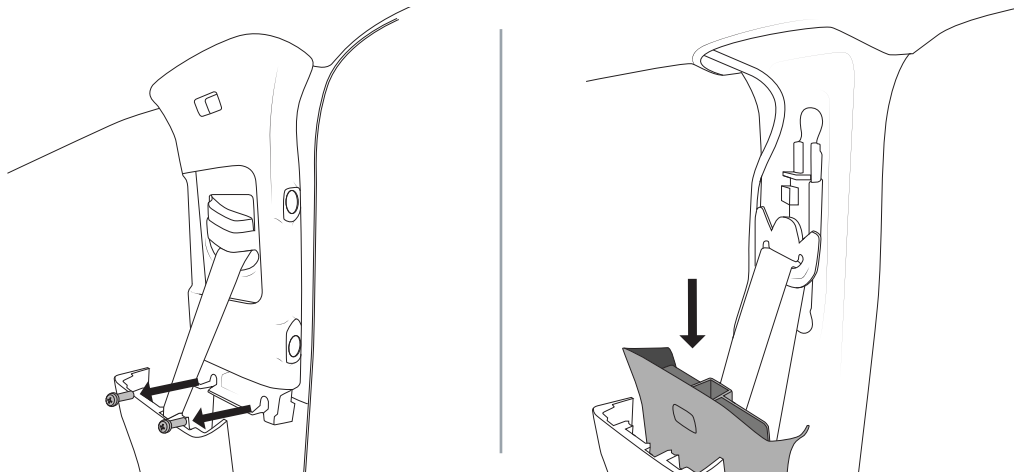



19

Fold down the rear seats to gain access to the rear wall trim to remove the C-pillar trims.

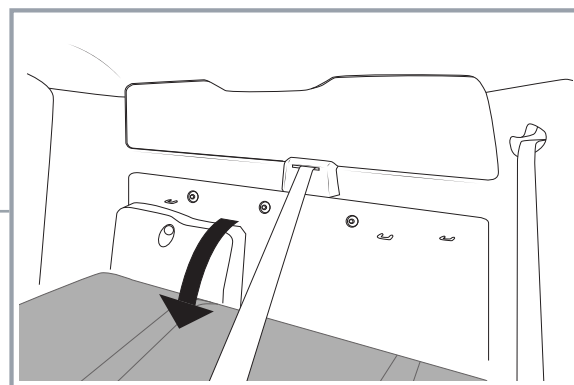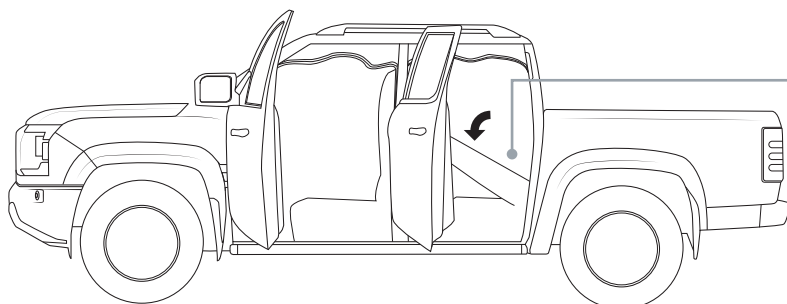



20

Remove the rear wall cover, first remove the top cover of the middle seatbelt and then release the trim from the top edge, be aware of the push clips holding it in place.

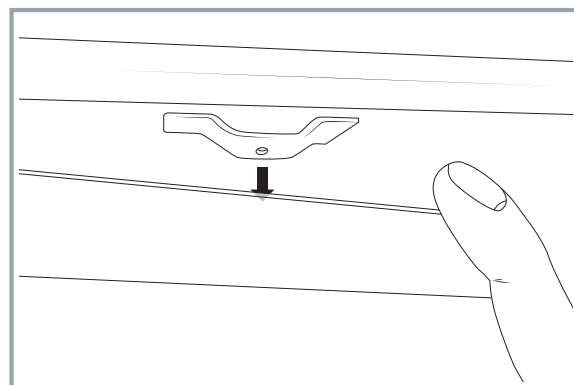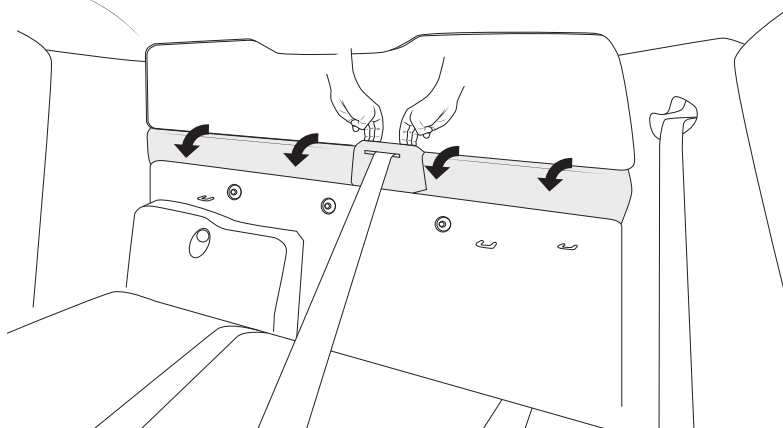


21

Remove the airbag cover of the upper C-pillar trim and undo the 8mm fastener.

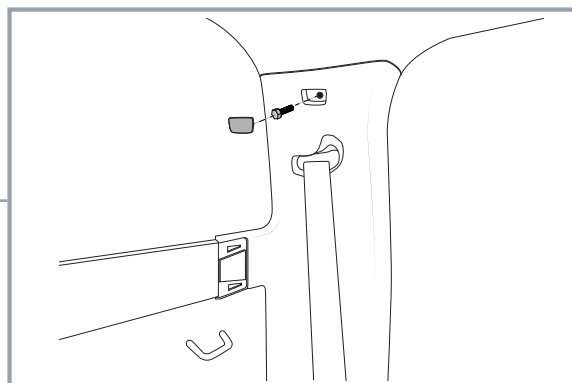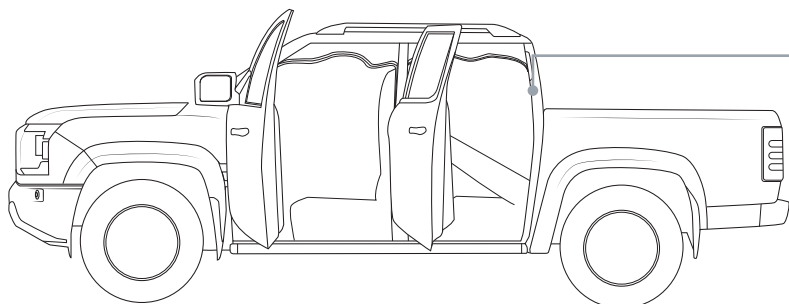


22

Starting from the bottom C-pillar trim, release the outer edges and the 4 clips holding it in to gain enough access to the upper C-pillar trim hardware.

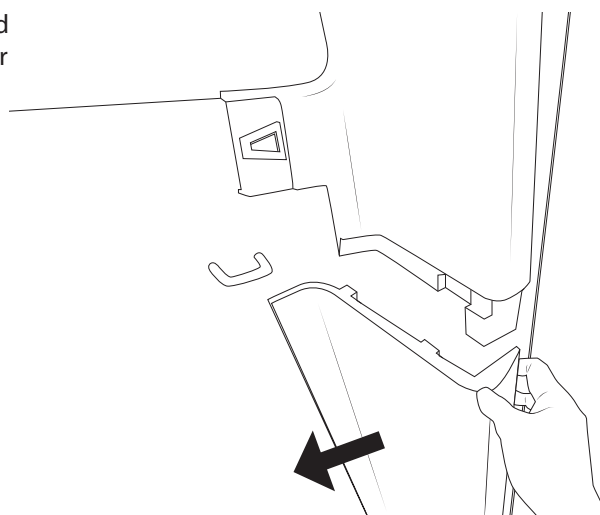


23

Then undo the 2xPH2 on the upper C-pillar trim as well as the two clips in the middle area.

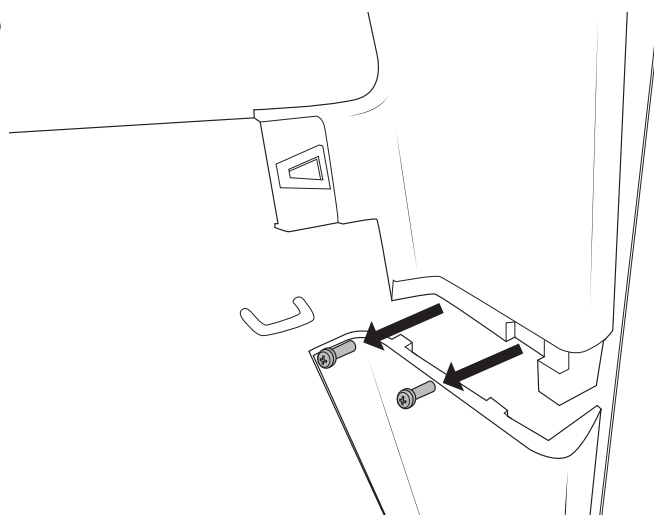



24

Drop the upper C-pillar cover as shown.

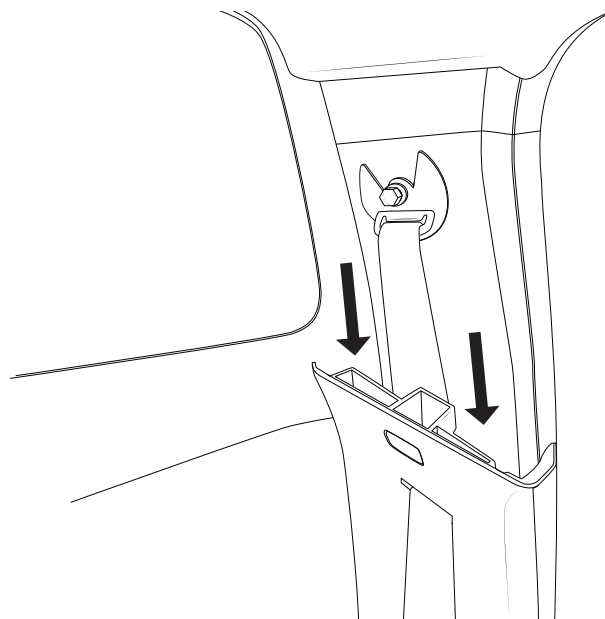



25

Remove the hardware inside the void left by the sunglasses unit.

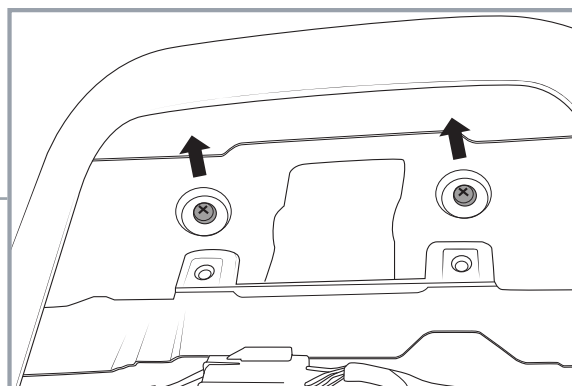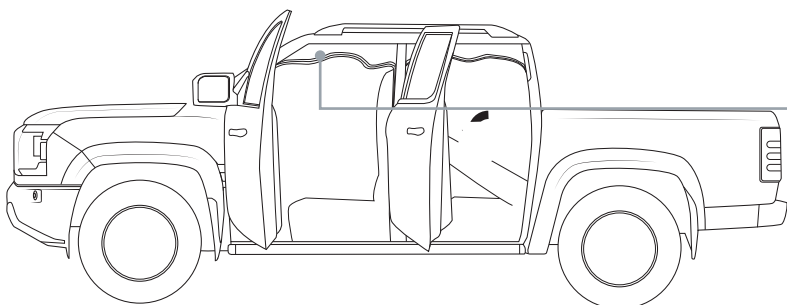


26

Starting from the front release the Velcro that is present in the front and the middle of the roof liner, then slide forward to release from the rear clips and rear Velcro. Remove the rear clips and reattach to the roof liner allowing the liner to rest on the chairs.

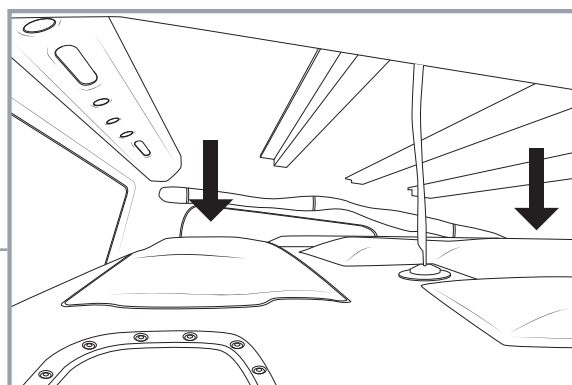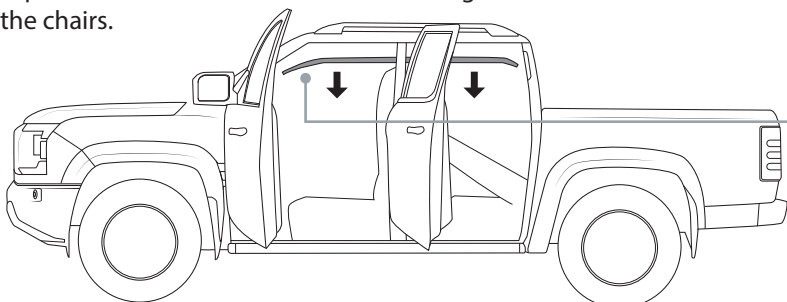



27

Remove the factory speaker in the roof. This must be completed to gain access to the factory rail hardware.

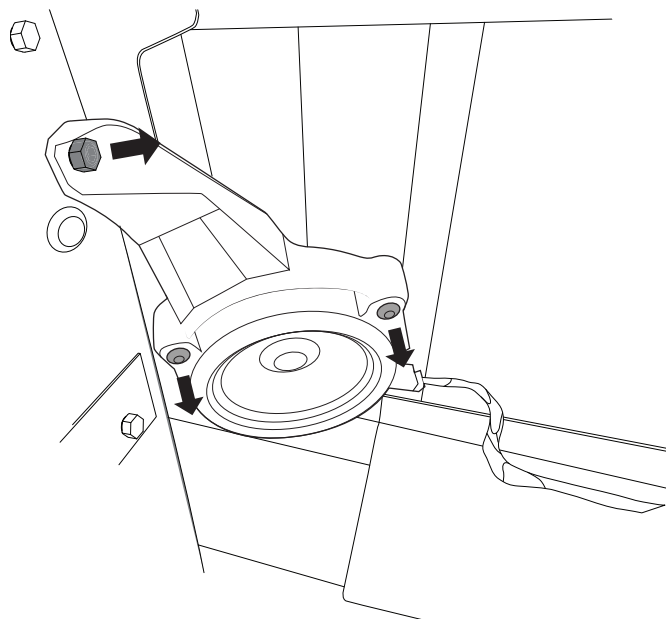

28



Remove the factory rail.

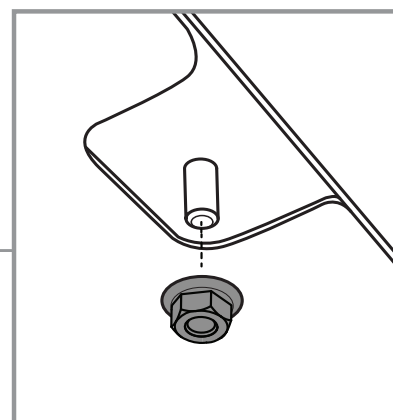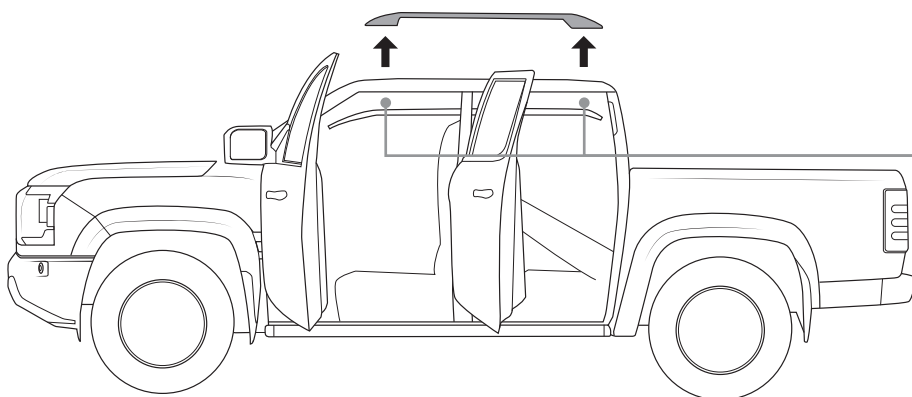

29


Place 2x butyl patches over all holes in the roof, which are now exposed.

Peel off protective strip to expose adhesive surface.

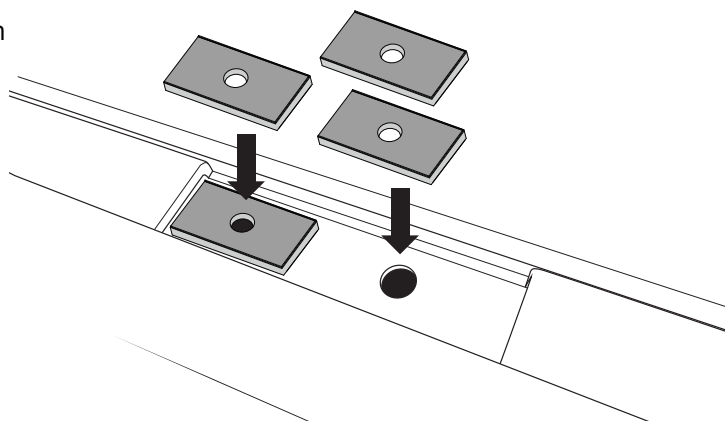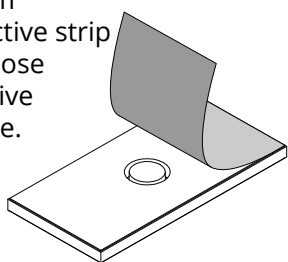


30

Install M8 hardware as shown.

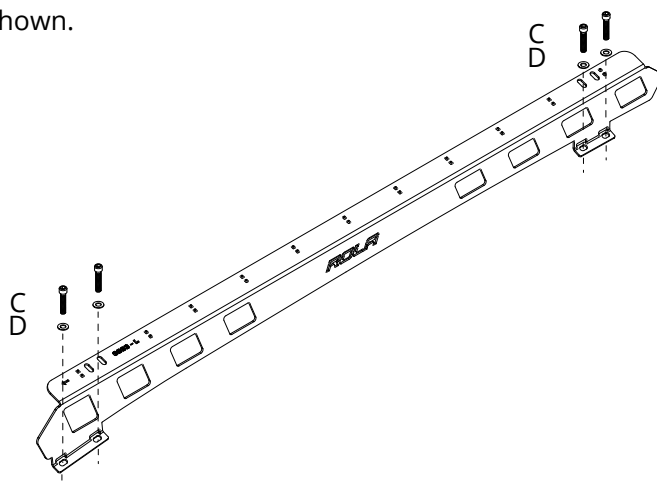


31

Install stud plates to the Ridge mount assemblies.

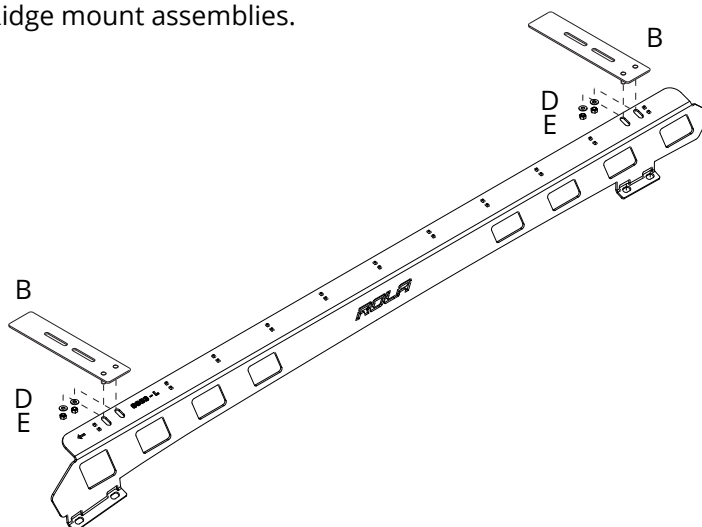


32


Install the Ridge Mounts to the roof of the vehicle.

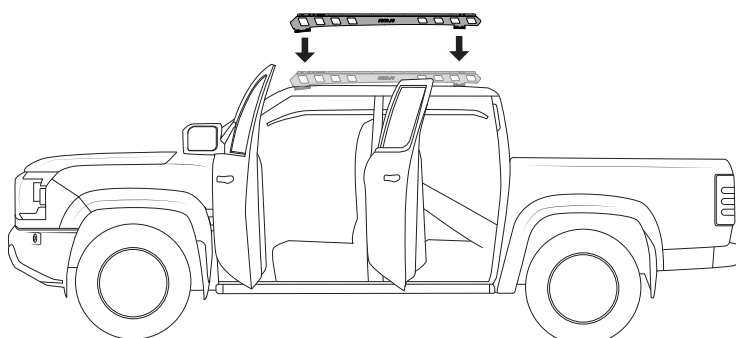

Fix in place with an M8 washer and nyloc nut, on the inside of the vehicle.

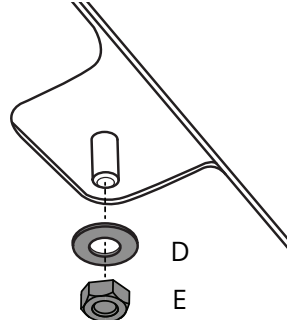



Tighten all hardware 4-5Nm.

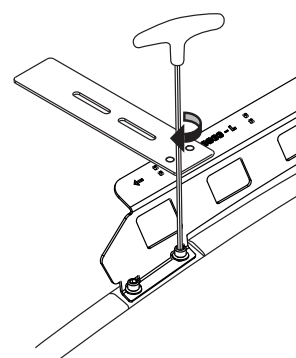


TITAN TRAY FITMENT

33


Install the Rola Titan Tray as per corresponding instructions.

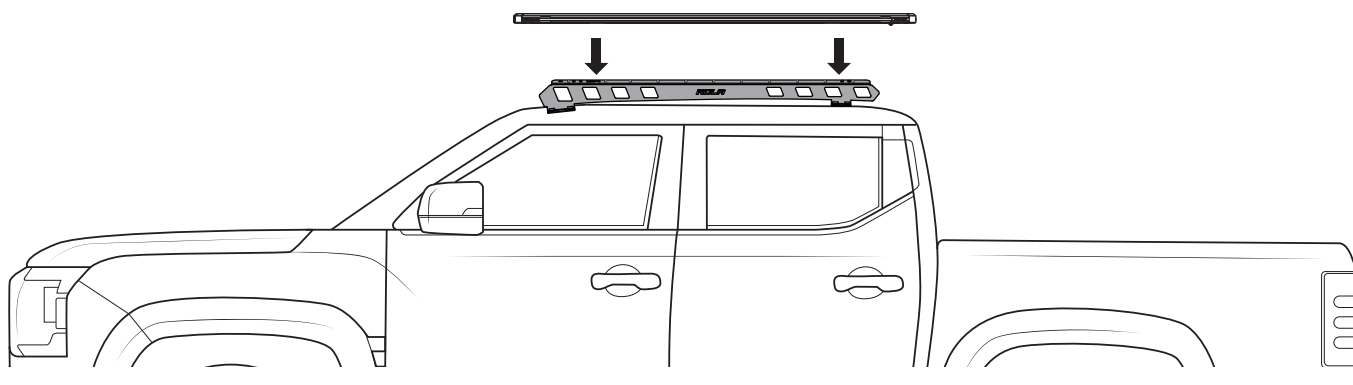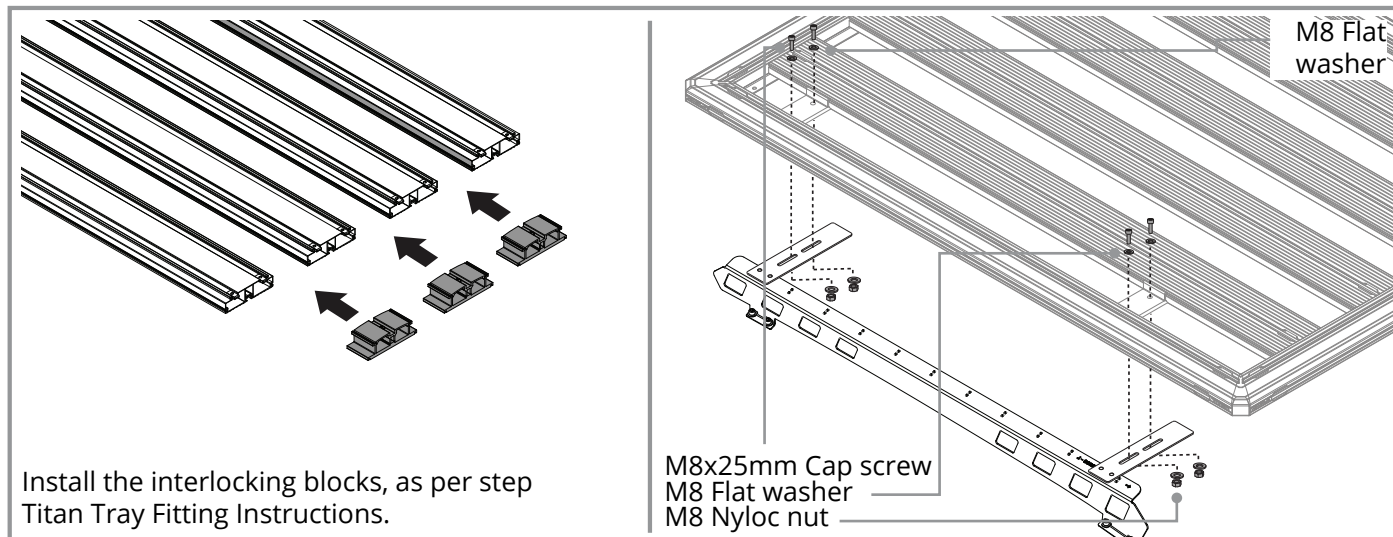

Note:

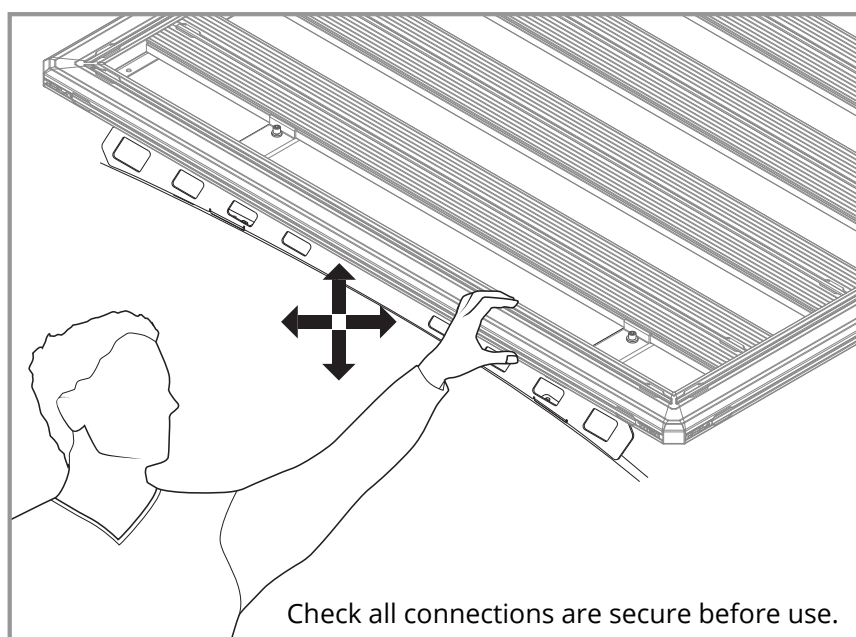

Wiring can be run and secured on the underside of the Ridge Mount rail as shown.

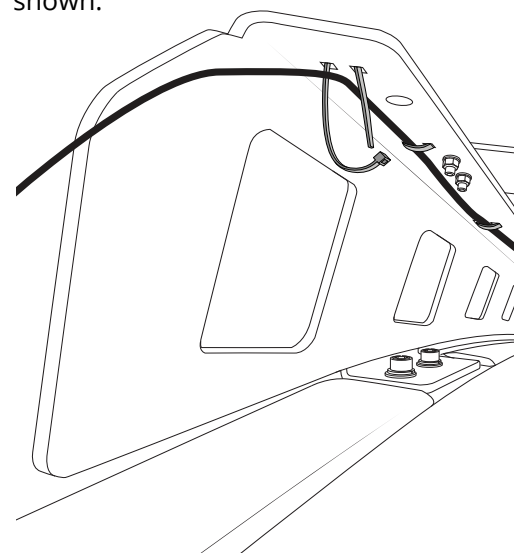

IMPORTANT - READ BEFORE USE

Please ensure the system is fitted in accordance with the fitting instructions. It is important that you observe all outlined below.



LOAD RECOMMENDATIONS

- Routinely and regularly check the proper functioning of the system. Check all fixtures at regular intervals.
- Do not use an automatic carwash with system installed.
- Maximum load capacity of the system is 400kg under static conditions.
- Maximum load capacity of the system is 100kg under dynamic including off-road conditions.
- Do not exceed vehicle manufacturers recommended load rating if it is lower than the maximum load capacity specified in this document (i.e., 100kg).
- Ensure any load carried is evenly distributed.
- Actual load on vehicle Roof (Refer to owner's manual) = Weight of Roof rack system / Ridge Mount + Weight of Tray + Weight of cargo.
- Actual load on rack system (Refer to product instructions) = Tray weight + cargo.

WARRANTY INFORMATION

Rola warrants that, subject to exclusions and limitations below, the Ridge Mount system will be free from defects in materials and workmanship for a period of 5 years commencing on the date of sale by the authorized Rola stockist to the original purchaser of the system.

If a defect appears in the Ridge Mount system before the end of the warranty period and Rola finds that the defect is in materials or workmanship, Rola will, in its sole discretion, either:

1. Repair the Ridge Mount or the defective component of the Ridge Mount system free of charge
2. Replace the Ridge Mounts or the defective component of the Ridge Mount system; or
3. Refund the purchase price of the Ridge Mount system to the original purchaser.

Rola reserves the right to change the design, specifications or composition of the Ridge Mount system without notice and without liability.

Rola reserves the right to replace defective products or components with products or components of similar quality, grade and composition, where an identical product or component is not available. Goods presented for repair may be replaced by refurbished goods of the same type rather than being repaired. Refurbished parts may be used to repair the goods.

The 5 year warranty does not apply where:

1. The Ridge Mount system is not installed in compliance with the fitting instructions provided
2. The Ridge Mount system is not used as intended or designed
3. Any part of the Ridge Mount system is used with other products or components not intended to be used in conjunction with the Ridge Mount system
4. The Ridge Mount system has been on-sold or assigned by the original purchaser
5. The Ridge Mount system has been modified or repaired by someone other than Rola or an authorized Rola stockist
6. Rola cannot establish any fault after inspection of returned product
7. The Ridge Mount system has been subject to abnormal conditions, including fire, water, humidity, pressure, stress or similar
8. The defect in the Ridge Mount system has arisen due to abuse, misuse, neglect or accident
9. The defect in the Ridge Mount system has arisen due to the unlawful or unusual operation of the vehicle to which it is fitted
10. The defect in the Ridge Mount system has arisen due to the purchaser's failure to properly assemble, install, fit, maintain or use the Ridge Mount system in accordance with the specifications and instructions provided by Rola.

For safety and use instructions, please refer to any General or Specific Fitting Instructions and Warning & Care Instructions enclosed within the Ridge Mount system or on our website at www.rola.com.au.

This warranty does not extend to fair wear and tear. Warranty claims can be made by contacting Rola directly using the details below. A warranty claim must be accompanied by proof of purchase (such as receipt), details of the alleged defect and appropriate documentation (such as historical and maintenance records where appropriate). The customer must make the product available to Rola or its authorized repair agent for inspection and testing. If such inspection and testing finds no defect in the product, the customer must pay Rola usual costs of service work and testing. It is the purchaser's responsibility to arrange and pay to return the product or component to the place of purchase. The purchaser may seek reimbursement from Rola for the cost of such activities, providing Rola notifies the purchaser in writing that a warranty claim is justified. Any such claims made must be in writing via post or email.

The benefits of this warranty are in addition to any rights and remedies imposed by Australian State and Federal legislation that cannot be executed. Nothing in this warranty is to be interpreted as excluding, restricting or modifying any State or Federal legislation applicable to the supply of goods and services which cannot be so excluded, restricted or modified. Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure. Rola makes no express warranties or representations other than set out in this warranty.