


## SWAY BAR LINK KIT

1. Raise front of vehicle, support on stands and remove the front wheels.
2. Detach the sway bar links from the upper strut mounting point. Loosen the sway bar brackets to permit the sway bar to move freely in its bushes. Discard the original links from the sway bar. Clean eyes at each end of the sway bar and existing holes in control arms which accept modified link rods.
3. Assemble the modified link firstly with the two flanged nuts. The shoulder nut must face away from the threaded section, leaving approximately 56-58mm of thread open on each end of the link.
4. Install a cup washer and bush on the rod with the cup profile facing the bush. Install the rod and bush to one end of the sway bar, with link facing downwards (see diagram). Install bush and cup washer on other side of eye and secure with a nyloc nut. Carry out same procedure to the other end of sway bar..
5. Install bush and cup washer to the links and fit through existing holes in control arms. Install bush and cup washer to end of link rod and secure with nyloc nut.
6. Lower vehicle to correct ride height. Tighten all nyloc lock nuts until bushes just contact sway bar and control arm surfaces, then tighten nuts a further  $\frac{3}{4}$  to one turn.
7. Ensure all mounting points are secure and check assembly after a test drive.

Kit Contents: 2 x Link rods, 8 x cupped washers, 8 x bushes, 4 x nyloc nuts & 4 x flanged nuts

**NOTE:** Kit does not contain any sway bar 'D' bushes. It is recommended that new bushes are fitted when fitting modified link rods.

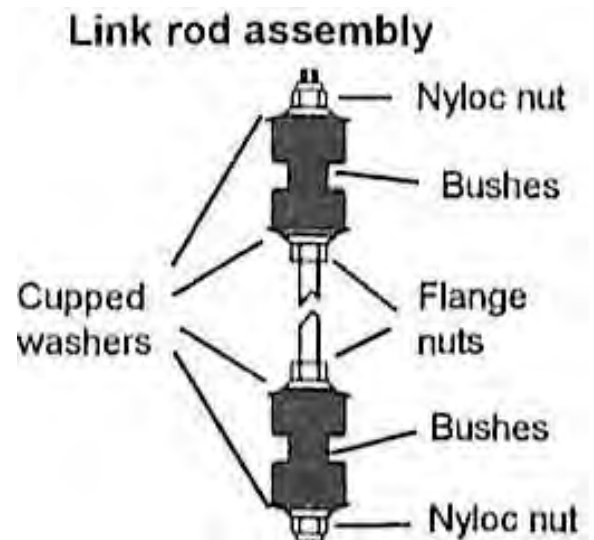

This procedure must be carried out by a qualified person

# Instructions

## Extension Brackets

### - Swaybar and Head-light Sensor

**N.B:** This instruction sheet should be used in conjunction with the workshop manual and proper safety procedures followed.

Page 1 of 2

**Note - this kit can be installed at ride height or while lifted.**

**Application** - Nissan Navara  
- NP300

*Always refer complete catalogue listing*

**Contents** - 2x Link brackets  
- 1x Head-light sensor bracket  
- 2x M12 x 35mm bolt  
- 1x M8 x 25mm bolt  
- 2x Flat washers  
- 2x Spring washers



- Un-bolt upper swaybar link nut.

- Using supplied brackets, M12 bolts and washers - bolt up bracket as per image.

- Place washers and nut on the inside.

- Bolt up original swaybar link to lower hole as per image.

**RH side bracket shown**



**N.B:** It is recommended that a licenced workshop or tradesperson carry out the above procedure and that workshop manual and relevant safety procedures are followed in addition to the above.

# Instructions

## Extension Brackets

### - Swaybar and Head-light Sensor

Page 2 of 2

Continued;

**Application** - Nissan Navara  
- NP300

*Always refer complete catalogue listing*

**Contents** - 2x Link brackets  
- 1x Head-light sensor bracket  
- 2x M12 x 35mm bolt  
- 1x M8 x 25mm bolt  
- 2x Flat washers  
- 2x Spring washers

- Un-bolt original head-light bracket.

Discard bracket but retain original bolt.

Note - supplied bracket has 2 holes.  
- upper hole suited for 2 inch lifted.  
- lower hole suited for OE height.



- Bolt up new supplied bracket as per image.

Use supplied M8 bolt.



N.B: It is recommended that a licenced workshop or tradesperson carry out the above procedure and that workshop manual and relevant safety procedures are followed in addition to the above.