

Fitting Instructions #TRC6630IS

VW Amarok 2010-2021

Front Upper Control Arms



NOTE: These components must be fitted by qualified persons only, to factory specifications, as per the factory service manual. Photos are an indication and may vary slightly in appearance from the actual product

1. Raise vehicle by the chassis and support on a hoist or on stands.
2. Remove the front wheels.
3. Loosen the nut holding the ball joint to the upright, but not all the way. Strike the knuckle to break the taper and the upright will become free and the nut can be removed.




4. Undo both bolts from the upper control arm to frame mounts. The arm will now be free and can be removed.
5. Clean bushings clevises of any dirt or oil.
6. Installation is the reverse of removal with the new arm.
7. Remove the crush tubes from the new bushings and grease the inner bores and ends of the bushings using the supplied grease. Bolt the new arm into the frame, reusing the factory M10 bolts that were removed.

Fitting Instructions #TRC6630IS

VW Amarok 2010-2021

Front Upper Control Arms

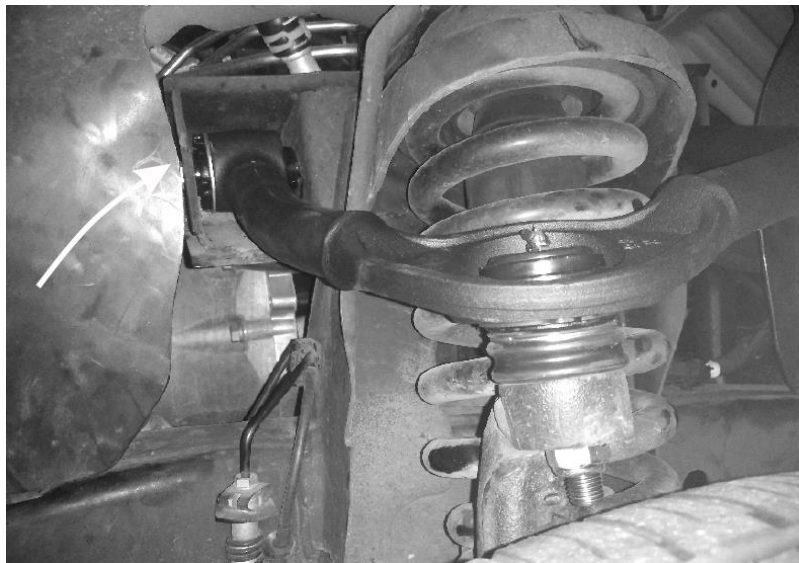

8. Install the stud of the ball joint into the upright.
9. Tighten the ball joint taper down using the new nyloc nut.
10. The installation is now complete and should look like the picture below.



11. Install wheel and lower vehicle to the ground. Check for any clearance issues.
12. Manufacture's torque setting must be used on all bolts.
13. The vehicle will now require a wheel alignment.
14. Recheck all bolts after 1000km or 1 month;