


Fitting Instructions #4112IS

TOYOTA 86 GT / FT, SUBARU BRZ

Rear Diff Mount Bushes replacement

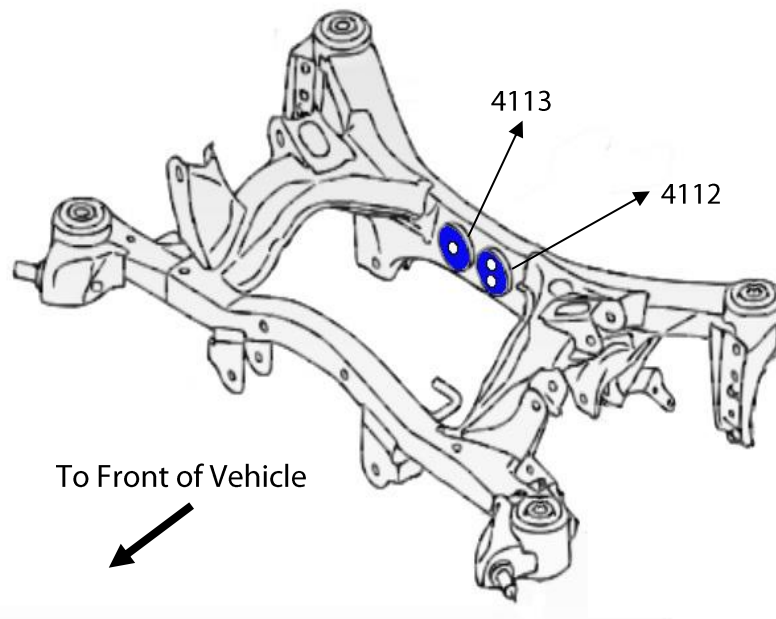


Note: It is possible to remove and replace these bushes without removing cross member

1. Jack vehicle and put on stands or support on hoist
2. Remove the rear sway bar and rear section of the exhaust to gain access to the differential mounting bolts.
3. Support the differential and remove the mounting bolts and lower differential slightly for ease of access.
4. For the right hand side bush use a suitable bar and tap the leading edge of the shell until the bush pops out.
5. If the shell stays behind after bush removal leave in place and clean up as it can be reused.
6. Remove the left hand bush using suitable extraction tools or cut out with power hacksaw. Care must be taken to not damage the cross member
7. If in step 4 the shell and bush pops out together, tap in the supplied shell into the cross member – see sketch attached
8. Clean up housing areas and grease bores of housings. Then, install the new polyurethane bushes with reference to the bush orientation as per sketch attached.
9. Refit all mounting bolts and torque to manufacturers specifications
10. Refit the exhaust and the rear sway bar.


Fitting Instructions #4112IS

Knock shell in with plastic mallet or similar

Lubricate the outside of the bush and push into shell

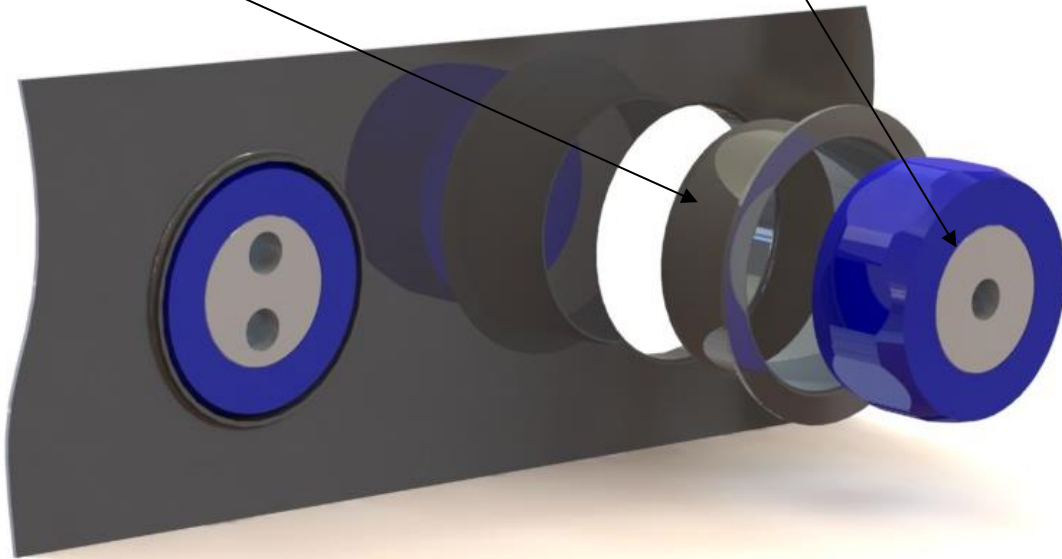

Note press shell so it sits up against the cross member

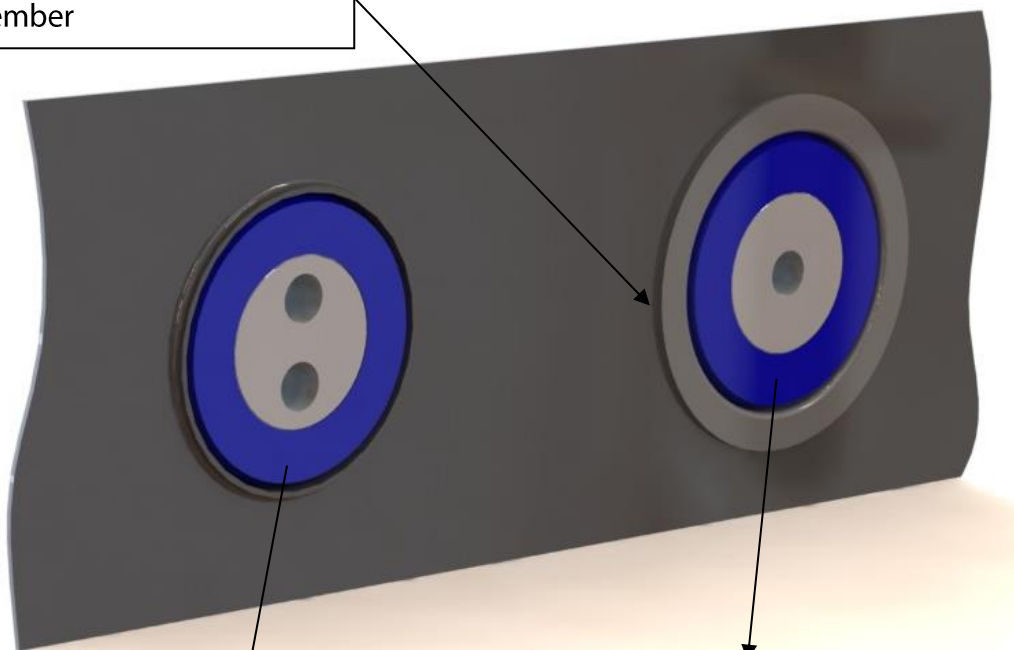

4112

4113