

Fitting Instructions #TRC1215

Nissan Patrol

Radius arm kit to suit 2 & 3" (50 & 75mm) lift in GQ & GU Patrol (ABS INC)



Revision: A

Date: 30/01/2024

****Please note, instructions are to suit right hand drive vehicles for left hand drive vehicle see note on bushing Installation ****

GQ Patrol

Note: SPF0981K (bracket) and SPF0642-__K (bush kit) will need to be purchased separately, taking note of sway bar diameter

- Wheel-align the vehicle before the job is started and note settings;
- Recommend using a 4 post hoist or removing the arms while vehicle is on the ground, using a bottle jack, or similar, to stop the differential from twisting;
- Recommend removing drag link to enable arms to be removed and replaced;
- Remove old radius arms from vehicle one at a time, installing new arm before taking other arm off the car;
- Replace the old radius arm with TRC1215 arms from Superpro kit to the vehicle, pre assemble rear ****please see note on Swaybar and ABS cable mounting****
 - RHD Vehicles as below **important for Left hand drive vehicles see Figure 2 for bushing configuration**
 - LHS
 - using 1 x SPF3468 assemble bush onto spigot as per figure 1;
 - assemble arm to vehicle, placing bolt through the 2 front bushes too the diff and hand tighten only at this stage
 - ensure spigot is through bracket on vehicle, once assembled, use 1 x SPF3467 bush and OE washer and assemble onto the end of the spigot
 - Tighten up nut onto spigot
 - RHS
 - using 1 x SPF3467 assemble bush onto spigot as per figure 1;
 - assemble arm to vehicle, placing bolt through the 2 front bushes too the diff and hand tighten only at this stage
 - ensure spigot is through bracket on vehicle, once assembled, use 1 x SPF3468 bush and OE washer and assemble onto the end of the spigot
 - Tighten up nut onto spigot

Fitting Instructions #TRC1215

Nissan Patrol

Radius arm kit to suit 2 & 3" (50 & 75mm) lift in GU & GQ Patrol (ABS INC)



Revision: A

Date: 30/01/2024

GU Patrol

- Wheel-align the vehicle before the job is started and note settings;
- Recommend using a 4 post hoist or removing the arms while vehicle is on the ground, using a bottle jack, or similar, to stop the differential from twisting;
- Recommend removing drag link to enable arms to be removed and replaced;
- Remove old radius arms from vehicle one at a time, installing new arm before taking other arm off the car;
- Replace the old radius arm with TRC1215 arms from Superpro kit to the vehicle, pre assemble rear ****please see note on Swaybar and ABS cable mounting****
 - RHD Vehicles as below **important for left hand drive vehicles see Figure 2 for bushing configuration**
 - LHS
 - using 1 x SPF3468 assemble bush onto spigot as per figure 1;
 - assemble arm to vehicle, placing bolt through the 2 front bushes too the diff and hand tighten only at this stage
 - ensure spigot on the rear of the arm is through bracket on vehicle, once assembled, use 1 x SPF3467 bush and OE washer and assemble onto the end of the spigot
 - Tighten up nut onto spigot
 - RHS
 - using 1 x SPF3467 assemble bush onto spigot as per figure 1;
 - assemble arm to vehicle, placing bolt through the 2 front bushes too the diff and hand tighten only at this stage
 - ensure spigot on the rear of the arm is through bracket on vehicle, once assembled, use 1 x SPF3468 bush and OE washer and assemble onto the end of the spigot
 - Tighten up nut onto spigot

Fitting Instructions #TRC1215

Nissan Patrol

Radius arm kit to suit 2 & 3" (50 & 75mm) lift in GU & GQ Patrol (ABS INC)



Revision: A

Date: 30/01/2024

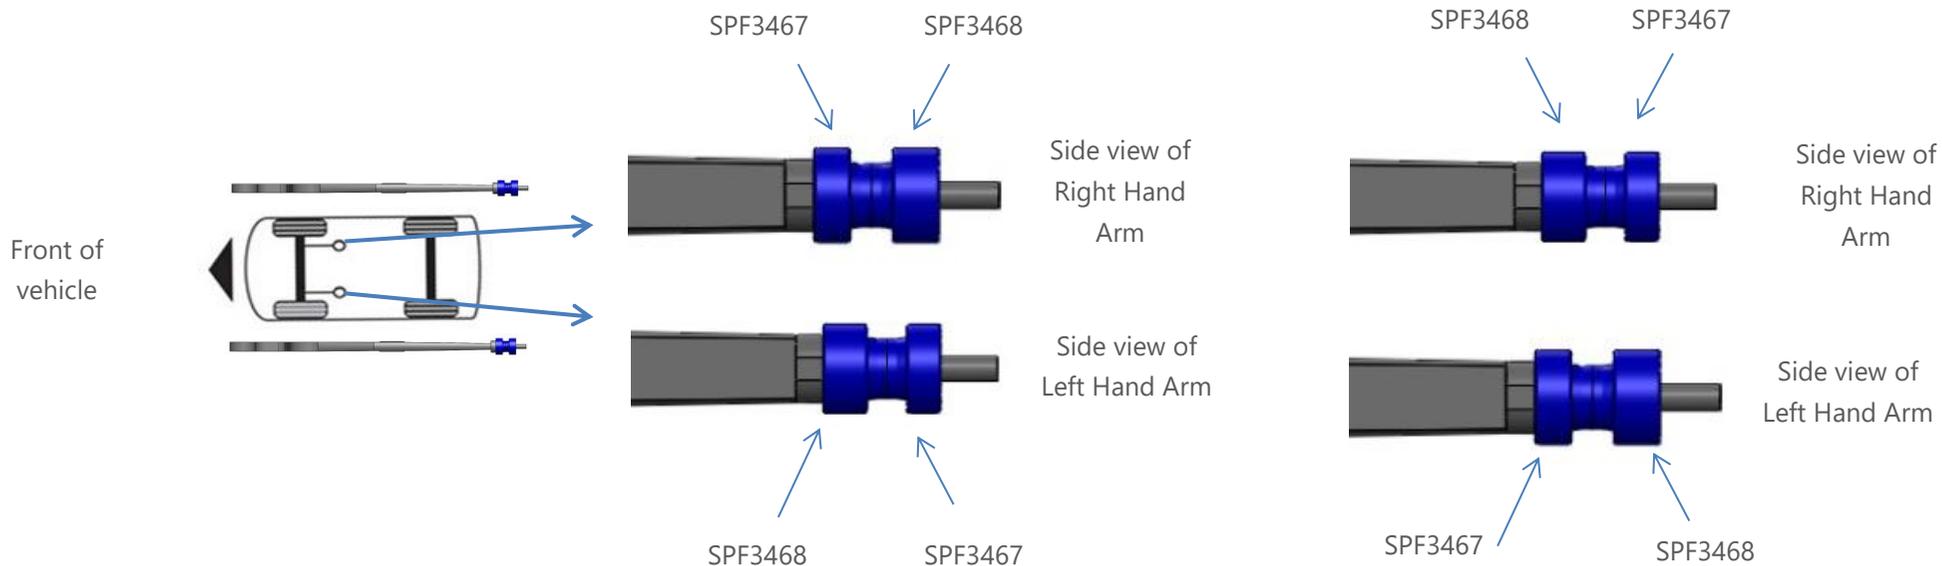


Figure 1 (Right hand drive bushing configuration)

Figure 2 (Left hand drive bushing configuration)



Image 1 (sway bar spacers)

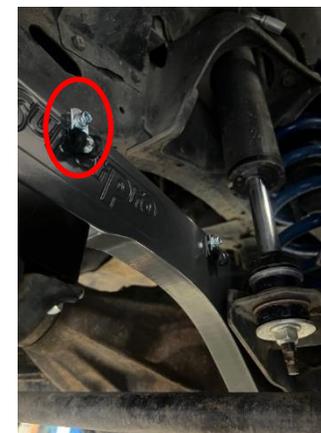


Image 2 (ABS Cable Clamp)

Fitting Instructions #TRC1215

Nissan Patrol

Radius arm kit to suit 2 & 3" (50 & 75mm) lift in GU & GQ Patrol (ABS INC)

Superpro
Suspension Parts

Revision: A

Date: 30/01/2024

NOTE:

- In our test vehicles we were able to achieve approx. 4° change in caster for a 2" (50mm) lift and 2.5° change in caster for 3" (75mm) lift
- With the vehicle on the ground and at normal ride height release and retighten the front 4 diff mounting bolts to 172 Nm;
Important – Failure to do this can lead to early bushing failure
- Re fit sway bar (with appropriate bushes and brackets) to arms; Use provided spacers between sway bar bush and radius arm to correctly with M10 bolts provided.
- If GU model with ABS, use supplied clamps bolts that attached thorough radius arm to secure cable, 3 postions per arm – check to see if cable is free to move through full range of motion.
- Install supplied sway bar links, TRC4307 (see TRC4307IS) and link sway bar to body of vehicle **NOTE: OE sway bar link will not work.**
- Carry out wheel alignment;