

# Fitting Instructions #1833IS

## Universal Parts

### Bump Stop Kits

- Part No's 1832K & 1833BK offer universal fitment for lowered height vehicles with strut type suspension. The fitment of lowered coil springs requires a firmer shorten bump stop, to control ride and allow suspension travel.
- Part No 1833K Offers large universal fitment range on all types of suspensions where the bump stop works on a 10-14mm damper shaft.
- The bump stops are designed so they can be accurately trimmed, to give the precise amount of control with maximum travel.

\*A unique replacement bump stop has been developed.

\*Superior engineering excellence has enhanced bump stop technology by utilizing our expertise in Polyurethane Suspension Components.

\*Precision Engineered Components for Specific Applications.



#1833K




#1832K



#1833BK


- **Vehicle:** LOWERED VEHICLES WIITH 19-22 mm DIA. SHOCK SHAFTS (Strut Suspension Systems Only);
- **Subject:** #1832K Universal replacement bump stops.
- When installing dampers and or replacing the coil springs Fulcrum recommends replacing the Bump Stops;
- This Universal replacement unit is designed to maintain the bump travel with lowered suspension;
- This Bump Stop can be used universally in any Strut Suspension Systems.

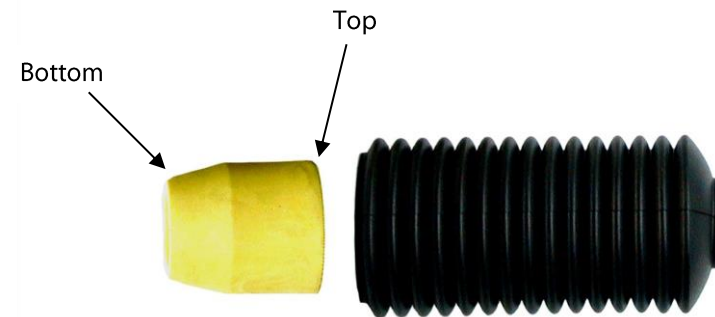

**Note**  
This dust cover may not be required in some applications.

# Fitting Instructions #1833IS

- **Vehicle:** VEHICLES WIITH 10-14 mm DIA. SHOCK SHAFTS;
- **Subject:** #1833K Replacement bump stops.
- When installing dampers and or replacing the coil springs Fulcrum recommends replacing the Bump Stops;
- This Universal replacement unit is designed to maintain the bump travel with lowered suspension. This, in some applications, requires trimming the foam bump stop to the required length ref. Photo below.

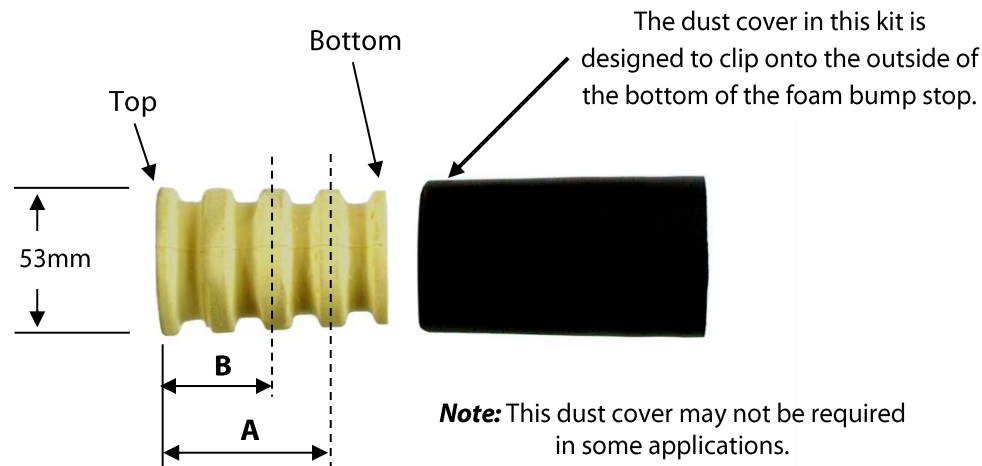


When trimming the length cut the bump stop with a razor sharp knife or fine tooth hacksaw blade

**Only cut at A or B as shown in the photo above**

**Example:**

- Ford Falcon XE-AU Rear replacement bump stop to suite coil spring vehicles with solid axle. Trim to **"A"** 59mm length required.

- **Vehicle:** LOWERED VEHICLES WIITH 19-22 mm DIA. SHOCK. SHAFTS (Strut Suspension Systems Only);
- **Subject:** #1833BK Universal replacement bump stops
- When installing dampers and or replacing the coil springs Fulcrum recommends replacing the Bump Stops;
- This Universal replacement unit is designed to maintain the bump travel with lowered suspension;
- This Bump Stop can be used universally in any Strut Suspension Systems.

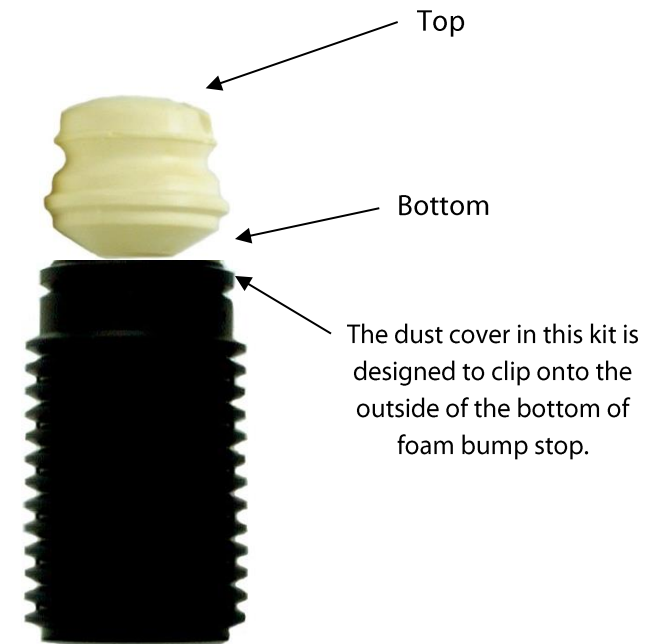

**Note**

This dust cover may not be required in some applications.