

# Fitting Instructions



SKU

PRODUCT

**T4H436**

**TAG HEAVY DUTY TOWBAR to suit Holden Colorado (01/2008 - 06/2012), Rodeo (01/2003 - 07/2008), Isuzu D-MAX (01/2007 - 08/2012)**



Scan for latest version of these instructions

## SPECIFICATIONS

- Towbar Class: Heavy Duty
- Towing Capacity: 3000kg

## IN THIS GUIDE

- Fitment Instructions
- Torque Settings
- Warranty Info

## Step-By-Step Instructions

### **Warning:**

Safety First: Always use correct safety equipment.

This towbar is NOT to be drilled, cut, welded or modified in any way.

Check the surrounding area before drilling into chassis or body panels for fuel lines, wiring harnesses and other components that may be a hazard.

### **General:**

Before fitting this towbar read fitting instructions and check installation hardware is correct.

Check that the towbar is suitable for the vehicle and be wary of any changes to the vehicle design that may conflict with the fitting of this towbar.


After drilling, blow any filings clear, remove any swarf and treat exposed metal with a rust inhibitor.

If this vehicle requires a bumper cut out, please check to make sure that you measure twice and check twice before cutting any panels as some bumper profiles can change.

If you are not sure, then ask your towbar supplier.

Tighten all bolts as specified on the last page.

# Towbar Fitting Instructions

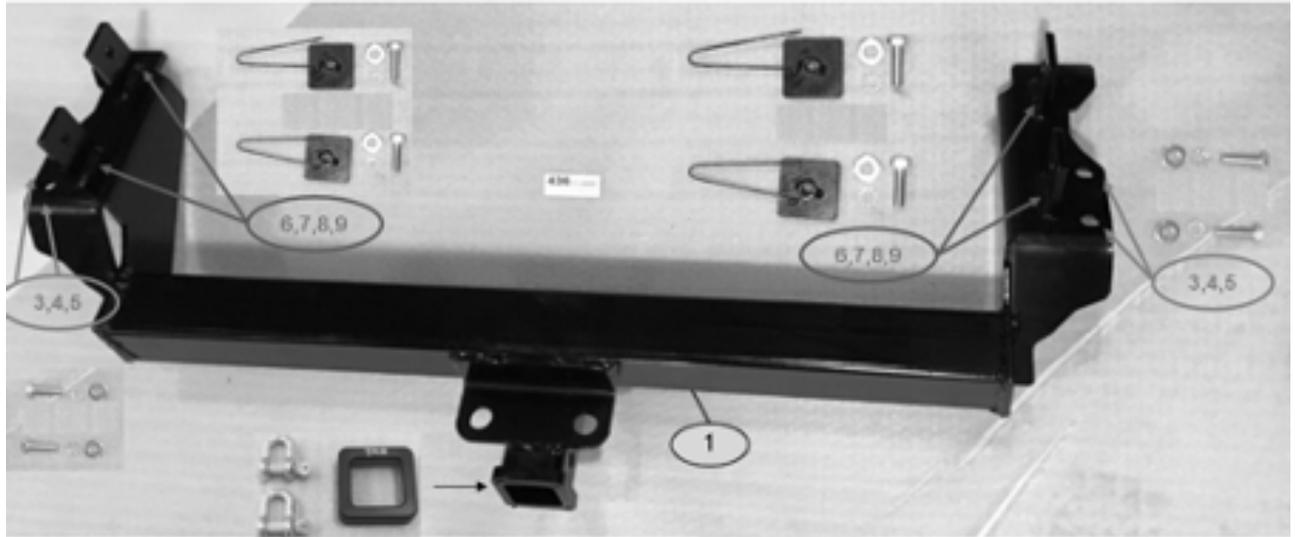

Tools Required: Spanners, Screwdriver, Sockets, Torque wrench

≈	DESCRIPTION	QTY.	ITEM NO.	DESCRIPTION	QTY.
1	Towbar – T4H436	1	6	½" x 1 ¾" UNC Bolt	4
NOT SHOWN	Ball Mount – L4045	1	7	½" Flat washer	4
3	M10 x 1.25 x 35 Bolt	4	8	½" Shake proof washer	4
4	M10 Shake proof washer	4	9	Nut plate and wire	4
5	M10 Flat Washer	4	-	Class 4 Pin and Clip, D-Shackles, and Hitch receiver cover	1 Set

## Step-By-Step Instructions

### Warning:

- This product is for towing purposes only and must only be loaded as shown in your vehicle Owner's Manual.
- This towbar is NOT to be drilled, cut, welded, or modified in any way.
- Check behind chassis rail and body panels before drilling to ensure no hazards are present
- All load ratings shown are under the assumption your trailer has a functional braking system installed
- When installed in positions other than the one depicted in these instructions the Tow Ball Mount may interfere or obstruct certain features of your vehicle (tailgate opening, Chassis clearance, etc.)

### General:

- Before fitting this towbar read fitting instructions and check installation hardware is correct.
- Check that the towbar is suitable for the vehicle and be wary of any changes to the vehicle design that may conflict with the fitting of this towbar. (Tray, Canopy, Suspension etc.)
- After drilling, blow any filings clear, remove any swarf and treat exposed metal with a rust inhibitor.
- The high tensile fasteners supplied with this product are an integral feature to achieving the specified rating, if replacement is required ensure that fasteners of the same grade (8.8) & quality are used. Contact an authorised TAG distributor or the TAG fitment centre - (07) 3208 3022 - if further information is required.

### Towbar Maintenance and Care:

It is recommended, when not in use, the Tow Ball Mount assembly and class 4 Pin and Clip is stored inside the car away from moisture to prevent standing water from forming rust. Inspect to ensure, on regular basis, fasteners are torqued to the specifications below and in good condition.

**Ensure that the fitting instructions are read and understood prior to fitment  
Place these instructions in the vehicle's glovebox after installation is completed**

# Towbar Fitting Instructions



## Step 1. Check hardware, remove tow hook, remove step

- a. Lay out the fitting kit next to the towbar with the fasteners in their respective positions on the towbar and ensure all hardware to be included is in the kit and correct
- b. Remove existing towing hook if fitted
- c. Remove rear step by removing 6 bolts located on sides of chassis, be sure to unhook cable from wiring harness.

## Step 2. Fit Towbar

- a. Lift towbar into position, loosely secure towbar into chassis mounting holes with M10 bolts, spring washers and flat washers. Insert the loose plates into the chassis and secure with ½” bolts, washers and spring washer.
- b. Tighten all bolts to torque listing below.

## Step 3. Fit Ball Mount and Apply Door Sticker

- a. Attach plastic hitch surround to receiver.
- b. Insert ball mount into hitch receiver and secure with the pull pin and R-clip.
- c. Apply one of the compliance labels to the pillar of the driver's door.
- d. Leave the remaining label & the fitting instructions in the vehicle handbook.



## Torque table for bolt tightening

Diameter	Pitch	Grade	Torque	Unit
M8	1.25	8.8	29	Nm
M10	1.25	8.8	57	Nm
M10	1.50	8.8	44	Nm
M12	1.25	8.8	101	Nm
M12	1.50	8.8	97	Nm
M12	1.75	8.8	77	Nm
M14	2.00	8.8	122	Nm
M16	2.00	8.8	190	Nm
<b>Imperial Bolt Torque Settings</b>				
3/8"	UNC	8	44.75	Nm
1/2"	UNC	8	108.5	Nm

## TAG Warranty Statement

SWD warrants your TAG Towbar for its full product life under the following conditions:

- You can show proof of purchase.
- The towbar has been correctly installed by a suitably qualified installer.
- The towbar has not been modified or abused in any way and has only been used for the purpose intended.
- The towbar was not fitted second hand to your vehicle.

The extent of this warranty includes materials and workmanship used in the manufacture of the towbar and is to the equivalent value of current, full replacement cost.

Nothing stated or implied in this warranty limits in any way, the statutory rights that you may have.

To make a claim visit the original installer in the first instance or, if you are unable to or are not satisfied with their help, then contact us direct by phone on 1300 669122 or visit [www.swd.com.au](http://www.swd.com.au)