

Install Guide

Diff Mount Front Bushes

Mazda CX-5 2012-On




Note: These components must be fitted by a qualified person only, as per the manufacturers' service manual. Also, all relevant safety procedures are followed in addition to the following. Photos are an indication and may vary slightly in appearance from the actual product.

Kit Contents:

- Bushing 20246Z x 2
- Steel tube 12.5x22.2x45.6 x 2

Brackets to be removed

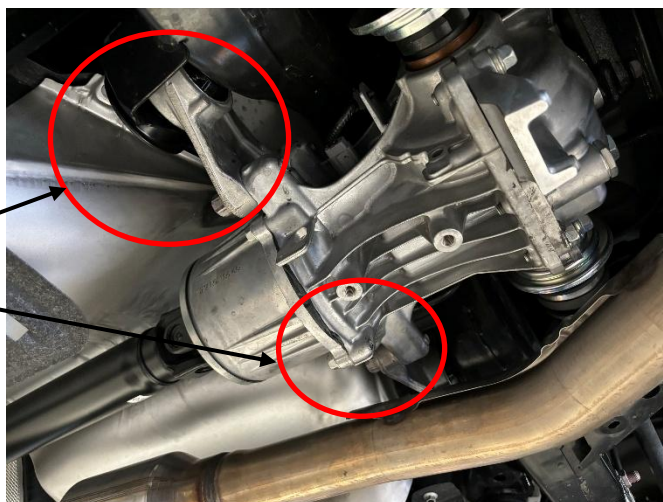

1. Raise and support the vehicle. Use bottle jack or similar to support the rear differential.
2. Undo the 6 fasteners (3 fasteners each bracket – 6 total) to remove the front diff brackets. The rear subframe bolts may need to be loosened (not removed) to undo fasteners.



3. Using a press and suitable press tools remove the factory rubber bushings including the shell.
4. Press in new replacement polyurethane steel shell bushings into the brackets. Apply grease to the inside of the bushing and press in steel tubes.
5. Install brackets back into the vehicle.
6. Ensure all fasteners are torque to manufacturer's specification.