

# Installation Guide

## Rear Differential Front Bushings


Suits: Subaru BRZ, Toyota GT-86 & Scion FR-S

Z 5289

*(Always refer to the current catalogue for complete application listings)*

N.B: This installation guide should be used in conjunction with the workshop manual.

- Remove the differential assembly from the vehicle and remove the OEM rubber bushings.
- Ensure the upper bushing bore is well lubricated including all bushing contact faces.
- OEM lower bonded rubber washer is not re-used with the bushings supplied
- Re torque all bolts to manufacturers torque specifications.

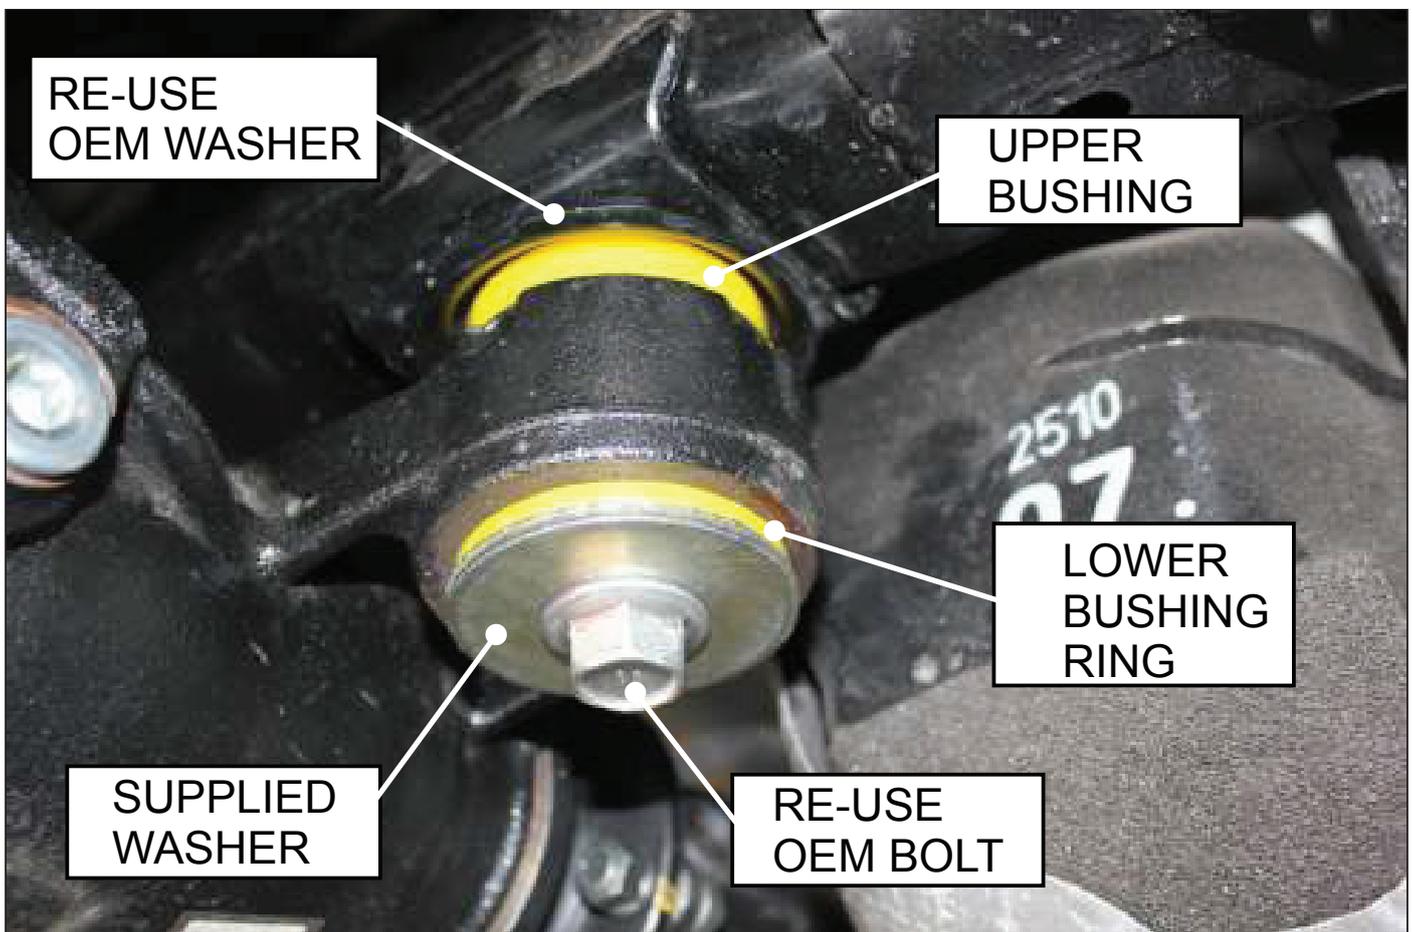

N.B: It is recommended that a licenced workshop or trades person carry out the above procedure and that workshop manual and relevant safety procedures are followed in addition to the above.