

Install Guide

Front Control Arm - Lower Inner Rear Bushing

Application - Nissan Qashqai
- 2013-on J11

(always refer current catalogue listing)

Contents - 2x vertical mount bushings

- Raise vehicle evenly and safely support.

Never rely on a Jack only

- Proceed to remove front wheels.

Note - a hydraulic Press will be required to press out old bushing.

- Lubricate threads before dismantling.




- Proceed to un-bolt rear vertical bolt.



- Un-bolt swaybar link - this will give you access to the 2 mounting bolts for the front bushing.

Refer Page 2

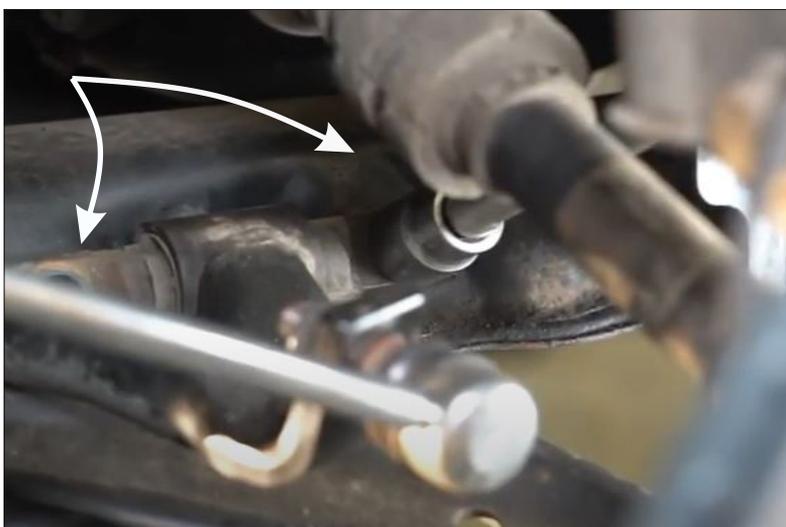


Note - It is recommended that a licenced workshop or tradesperson carry out the below procedure and that workshop manual and relevant safety procedures are followed in addition to the above.

Install Guide

Front Control Arm - Lower Inner Rear Bushing

- Remove ball joint bolt - then pry control arm downwards, sliding ball joint out of hub.
- Remove arm from vehicle.
- Using a Press, press out old bushing including steel outer shell.

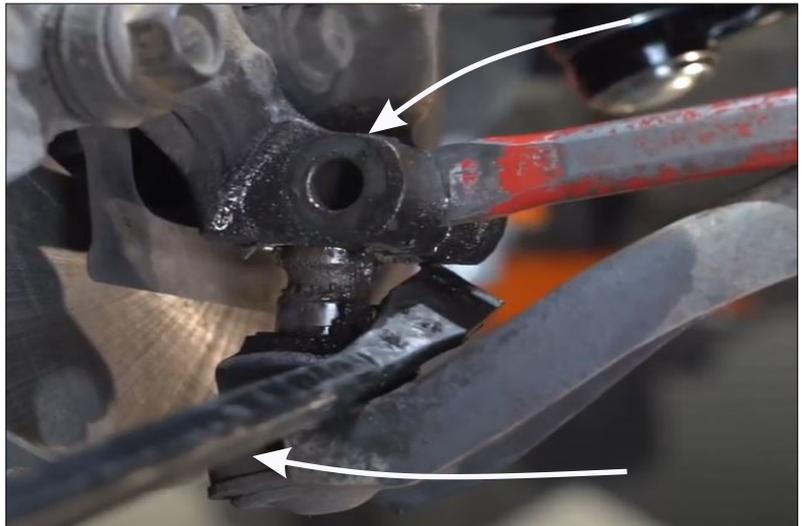

**Note - bushing diameter is 55mm
Use a Press Tool 53-54mm in diameter.
P/No PKN06.**

- Re-install arms to vehicle with original bolts.

**Note - a wheel alignment after install
is recommended - to fix any Toe change.**

- Re-check all bolts after 200kms

Note - It is recommended that a licenced workshop or tradesperson carry out the below procedure and that workshop manual and relevant safety procedures are followed in addition to the above.