

Installation Guide


Low Compliance Offset Strut Mount

Suits: Subaru Series


(Always refer to the current catalogue for complete application listings)

N.B: This installation guide should be used in conjunction with the workshop manual.
Please ensure the OE conical washer is installed between the top spring hat and strut mount otherwise possible bearing binding and failure may occur.

Set for: Max Caster
Max Negative Camber

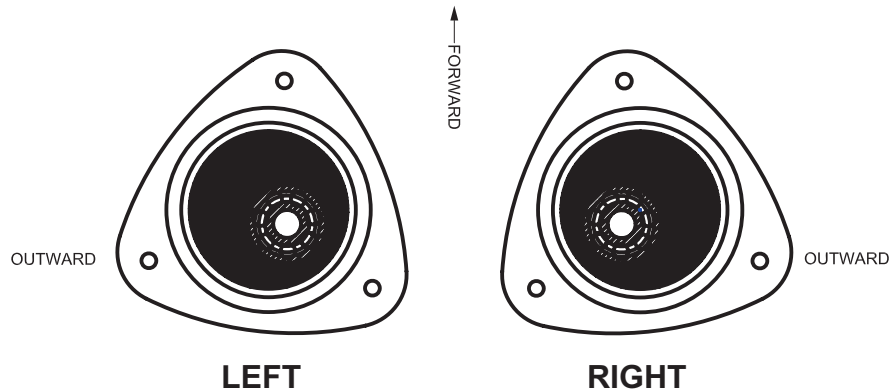

Set for: Max Caster
Min Negative Camber

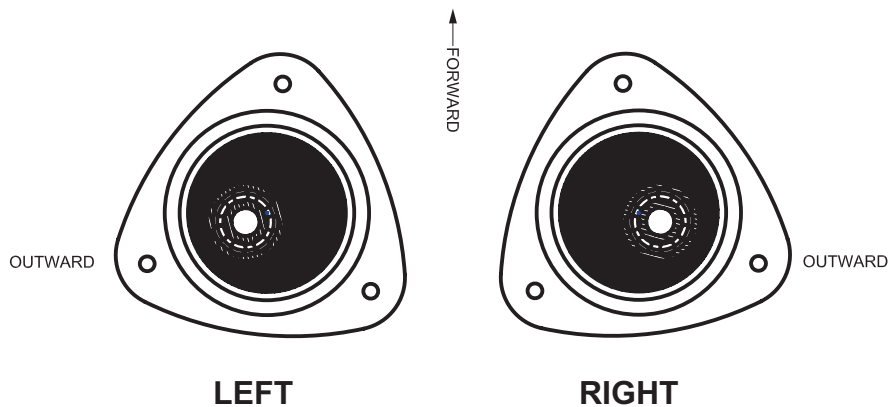

Adjustment outcome as above setting.
Achieve up to an additional

Camber: -1 deg 30 min

Caster: +0 deg 45min

Note: Strut mount's can be rotated 120 degrees to achieve different Caster and Camber settings.

N.B: It is recommended that a licenced workshop or trades person carry out the above procedure and that workshop manual and relevant safety procedures are followed in addition