

10" x 3

PART NUMBER	TYPE	RUBBER	INLET
CALL AIRBAG MAN	Bellow, 2 ply	Standard	N/A
CALL AIRBAG MAN	Bellow, 4 ply	Standard	N/A
DB1038	Assembly, 4 ply Bellow	Standard	1/2" BSP
DB1039	Assembly, 2 ply Bellow	Standard	1/2" BSP
CALL AIRBAG MAN	Bellow, 2 ply	Butyl	N/A
CALL AIRBAG MAN	Bellow, 4 ply	Butyl	N/A

Conditions of Use

Maximum Working Pressure	8bar
Burst Pressure	28bar
Maximum Angle between Top & Bottom Plates	15°
Maximum Axial Offset	10mm

Precautions to Observe

- Do not exceed stated stroke.
- Do not inflate assembly when it is unrestricted.
- Do not inflate beyond pressures stated without prior consultation with Dunlop.
- Respect maximum and minimum heights.
- The bellows must be securely fixed.
- Do not use without air pressure.

Operating Temperature

Standard Rubber...

Minimum -30°C (-40°C Static)
Maximum +70°C (+90°C Static)

Chlorobutyl Rubber...

Minimum -25°C (-30°C Static)
Maximum +90°C (+115°C Static)

Materials


- Bellows : Various rubbers - 'Standard' and 'Chlorobutyl' (High Temperature)
- Metal parts : mild steel, protected by zinc passivate and yellow chromate

Note


This bellow assembly can be completely dismantled

Dimensions

Maximum Diameter	280mm
Space Required	295mm
Minimum Height	100mm
Maximum Height	365mm
Total Stroke	265mm
Static Height	235mm
Effective Area at Static Height	350cm ²
Bellows Weight	5.4kg

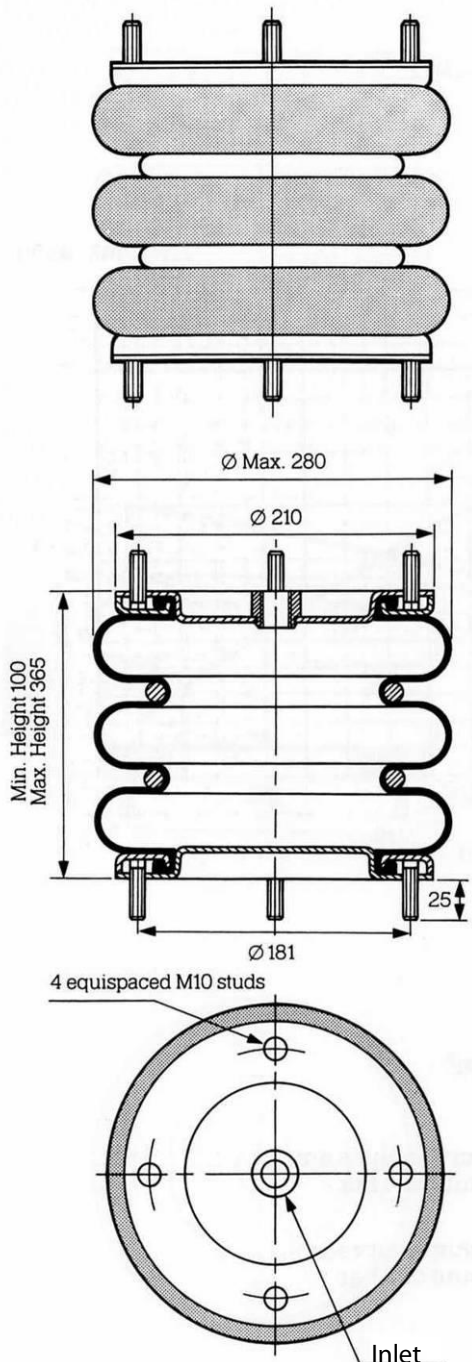

**Effective Area/Height
Volume/Height**

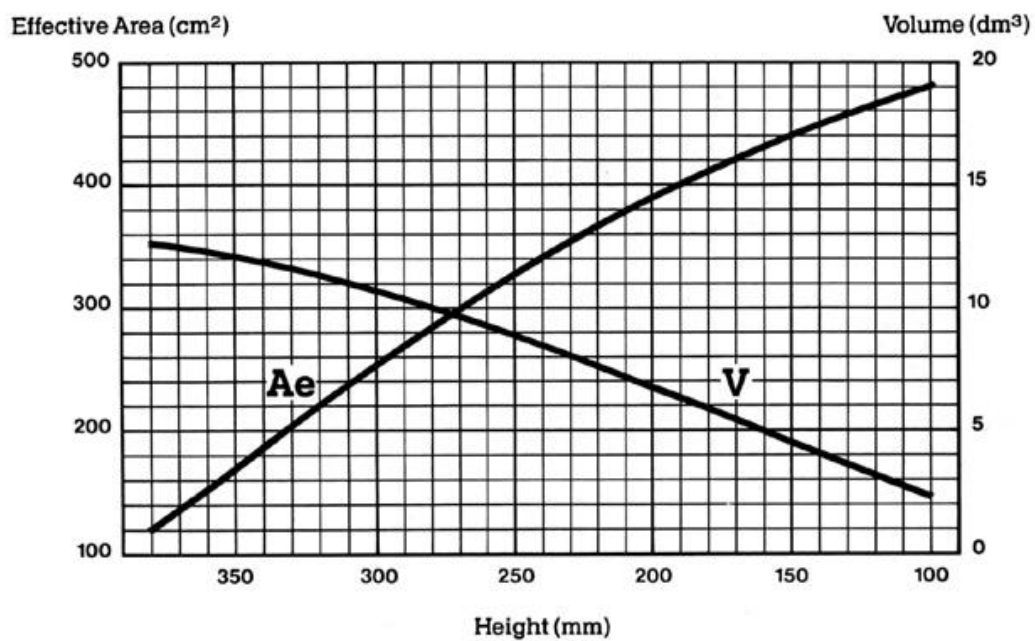

Ae Effective Area cm²

V Volume dm³

The effective area curve values are measured at a pressure of 4 bar (0.4 MPa).

The values of the volume curve are measured at a pressure of 7 bar (0.7 MPa).