

Install Guide

Front Differential Bushings

Mitsubishi Triton MV



Note: These components must be fitted by a qualified person only, as per the manufacturers' service manual. Also, all relevant safety procedures are followed in addition to the following. Photos are an indication and may vary slightly in appearance from the actual product.

Kit Contents:

- 3 x Bush 20248Z
- 3 x Steel Tube 18.5x12.6x54.7

1. Raise and support vehicle evenly.
2. Remove the skid plate. Locate the 3 differential brackets (Figure 1).

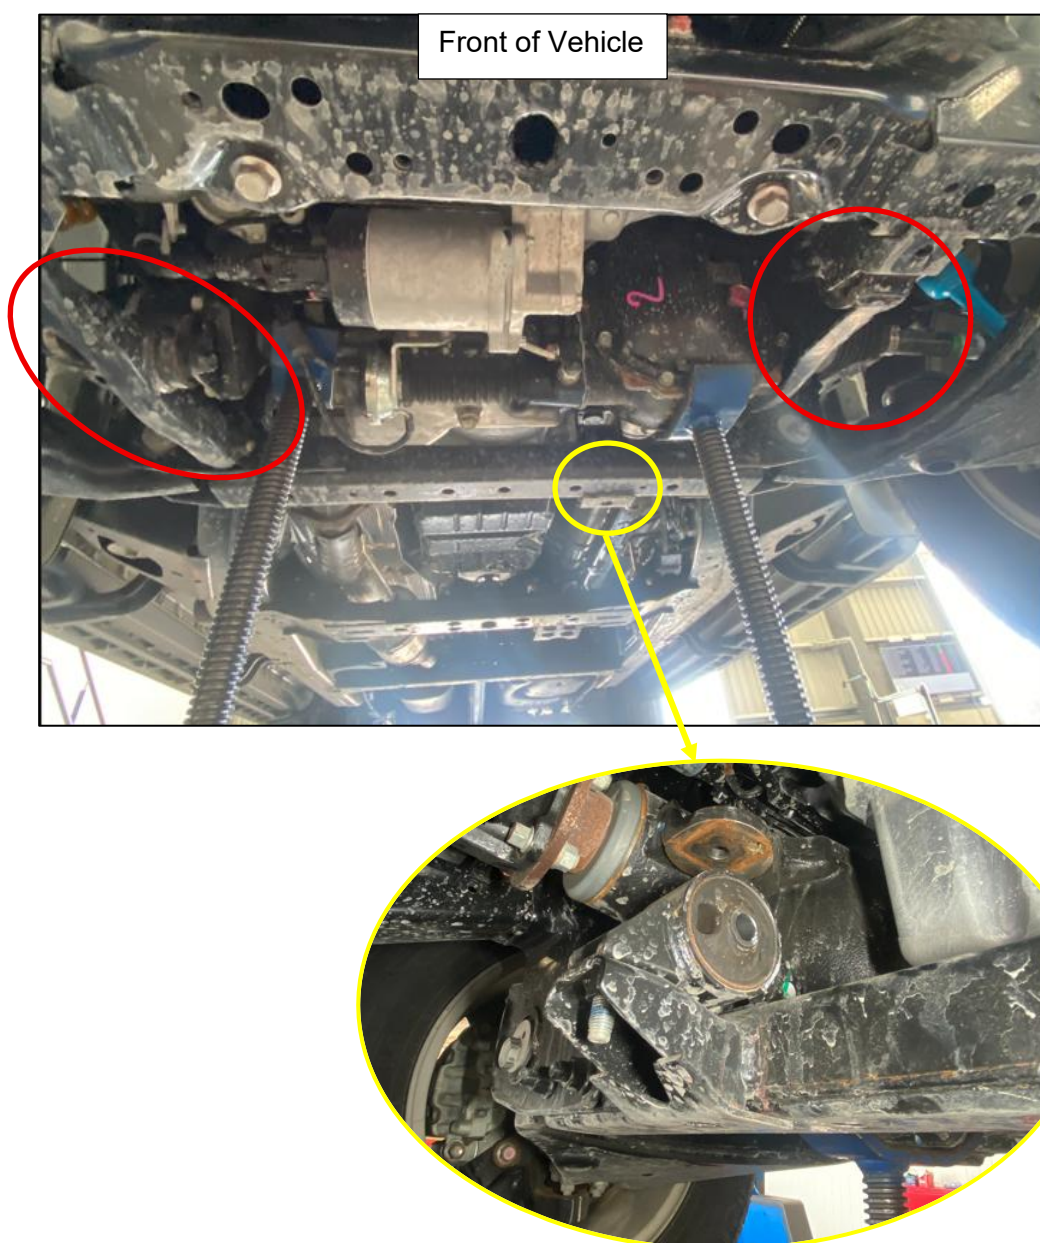


Figure 1: Differential Bracket Locations


Install Guide

Front Differential Bushings

Mitsubishi Triton MV



3. Support the differential and remove the brackets and replace bushes one at a time. To help with the removal and reinstallation, the differential may need to be raised or lowered but ensure it remains supported.
4. Using a press and suitable press tools remove the original bushes from the brackets including the steel shell. Press in the new polyurethane steel shell bushes into the brackets, ensuring that they are aligned so the voids in the bushes are vertical when the brackets are reinstalled into the car (see Figure 2).

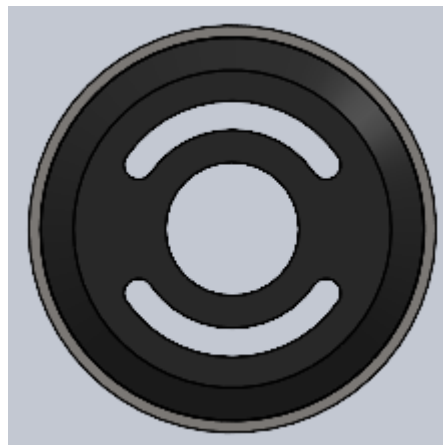

↑
UP

Figure 2: Replacement Bush Alignment

5. Grease the bore of the bush and push the tube into the bush.
6. Reinstall the brackets into the vehicle. Ensure all fasteners are torqued to manufacturer's specification.