



ACRYLIC BONNET PROTECTOR

Installation Instructions

Accessory Part No. PZQ15-89060 / PZQ15-89070

Installation Time: Approx. 20 mins

Place these instructions in vehicle's glove box after installation is complete


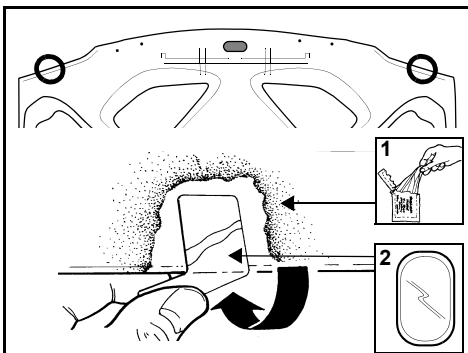


Diagram #1

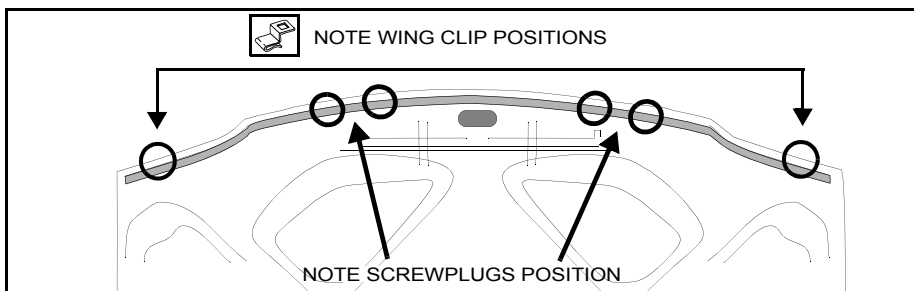

Open & thoroughly clean and dry the bonnet. Trial fit Bonnet Protector centrally onto bonnet. Note the rubber trim retaining plugs that correspond to the four slots in Bonnet Protector tags. Also note the two areas of the bonnet which correspond to the holes in the wings of the Bonnet Protector. Remove Bonnet Protector. At the previously noted metal wing clip positions, clean these areas with the alcohol wipe provided and remove any residue with a dry clean cloth. Adhere the abrasive resistant tape to the areas as shown. Fold tape over so approximately half of each strip is adhered to the outside and half to the underside of bonnet. **See Dia #1.**

IMPORTANT: Ensure that the abrasive resistant tape is positioned directly below the slots in Bonnet Protector.

Remove the retaining rubber trim plugs and insert the screw plugs provided. **See Dia #2.**

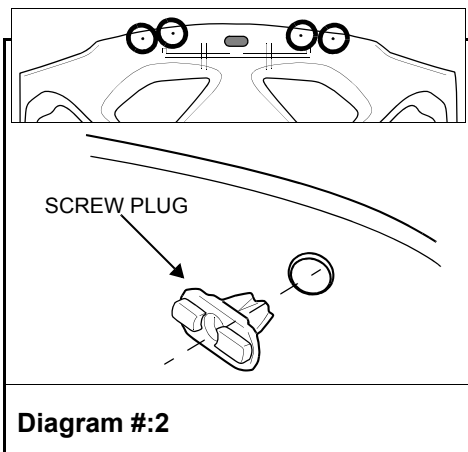


Diagram #2

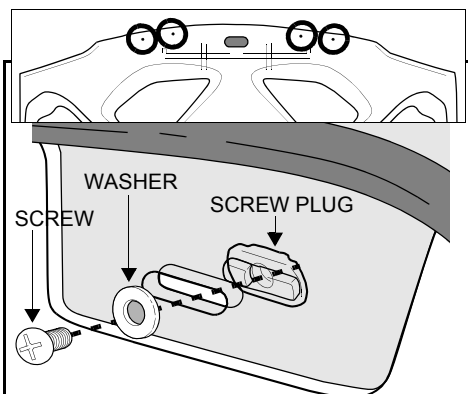


Diagram #3

Lift the rubber trim and re-fit the Bonnet Protector centrally and ensure the tag of Bonnet Protector is between the rubber trim and bonnet. Ensure the raised end of screw plugs locate in the slots of Bonnet Protector tags. Secure Bonnet Protector with the screws and washers provided.

DO NOT OVERTIGHTEN SCREWS. See Diagram #3.




Diagram #:4

Fit the nut insert into the wing clips, as shown in **Dia #4**.

IMPORTANT: Please ensure that the plastic nut insert correctly engages the square hole of the clip as shown.



If the thread insert is not fully engaged it may pull away from the clip during use.

To ensure full engagement, please use a pair of pliers to flatten the head of the insert against the clip, as shown above.

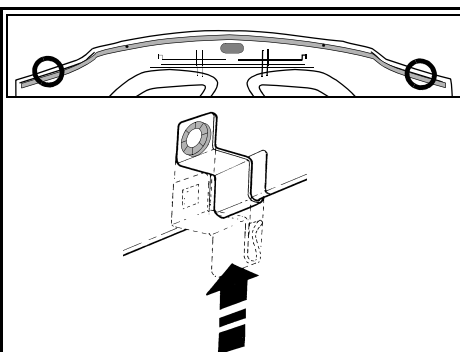


Diagram #:5

Install metal wing clips ensuring that the bottom leg hooks behind under bonnet sealant and top section is aligned with hole in Bonnet Protector. **See Diagram #5.**

IMPORTANT: Ensure that the clips are positioned over abrasive resistant tape and do not come in contact with any of the bonnet's paint work. Failure to do this may result in permanent paint damage.

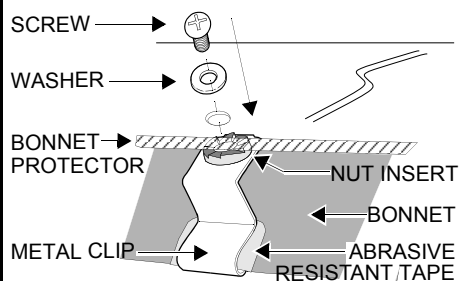


Diagram #:6

Secure the Bonnet Protector to wing clips with screws and washers provided. **See Diagram #6.**

TO REMOVE: Reverse above procedure.

Care Instructions:




Do not slam bonnet.



Clean Bonnet Protector with a mild detergent and water solution.

DO NOT AUTO WASH



Do not use abrasive cleaners.