

END SUPPORT (RIGHT)	END SUPPORT (LEFT)	MOUNT PAD (RIGHT)	MOUNT PAD (LEFT)	SNAP-ON COVER	SECURITY COVER	STRAP BRACKET	SCREW	SECURITY BOLT	SECURITY BOLT	ASSEMBLY KEY	CROSS-BAR ASSEMBLY

ANCHOR POINT BOLT	ALLEN KEY	BOTTOM STRAP BRACKET	BOLT COVER

SOME FITMENTS MAY ALSO FEATURE THE FOLLOWING COMPONENTS:

Please Note: You will require the following tools

Phillips Head Screwdriver Flat Head Screwdriver Rubber Mallet Safety Knife

ASSEMBLY OF CROSS-BARS

1. Ensure the roof is clean, free from dust and grease.

2. Insert the neck of the End-Support into the void of the Cross-bar profile. They are designed to be a tight fit: use a rubber mallet if necessary (Fig.1)

3. Pull back the rubber Buffer Strip about 20mm until the screw hole can be accessed.(Fig. 2) Using a Phillips Head Screwdriver, fasten the screw through the cross-bar and into the End Support.
Do this for all four sides and replace the buffer strip.

NOTE: The longer cross-bars are to be fitted to the front of the vehicle. Check labelling on the underside of the cross-bar.

FITTING CROSS-BARS TO VEHICLE

4. Identify your Strap Brackets and Mount Pads using the identification markings on them (if applicable) - refer to Fig 3 & Fig. 4

Position your Mount Pads onto the roof in the positions as specified in (Fig 4a). Place the Cross-bar assemblies (Front & Rear) in their respective positions onto the pads.

5. Next, open all 4 vehicle doors and leave them ajar whilst mounting and fastening the strap brackets.

Clip the locking straps onto the roof side moulding after pushing the weather seal clear. **NOTE:** Locking strap does not clip over both the roof side moulding and weather seal but fits in between (Fig.4b). Push the weather seal back into its original position.

6. Place the cross bar assembly onto the rubber pads. Fit the special bolt to one side only. Give two to three turns of the specail bolt with the security key provided. Go to the otherside of the vehicle and pull on the end support and fit in the same way.


7. Tighten the Strap Brackets via the Security Bolts whilst pushing the straps hard up against the vehicle body. Alternate sides whilst tightening for even tention across both sides.

Note: Leave a gap of approximately 3 to 5mm between the bottom of End Support and the top of the Strap bracket(Fig. 9). Over-tightening the bolts may result in damage to your vehicle and/or roof-rack.

8. Proceed to follow steps 5 to 7 when mounting the Rear Cross-bar Assy.

9. You are now ready to mount your "Accessories" set onto the cross-bars using the Global Mount Channel. Once installed, insert the 'Global Channel' Covers into the End Supports.

Note: You have a choice of 2 - (a) quick access snap-on cover or (b) long term mounting - security cover to cap off and lock the mount channel. (Fig. 6)

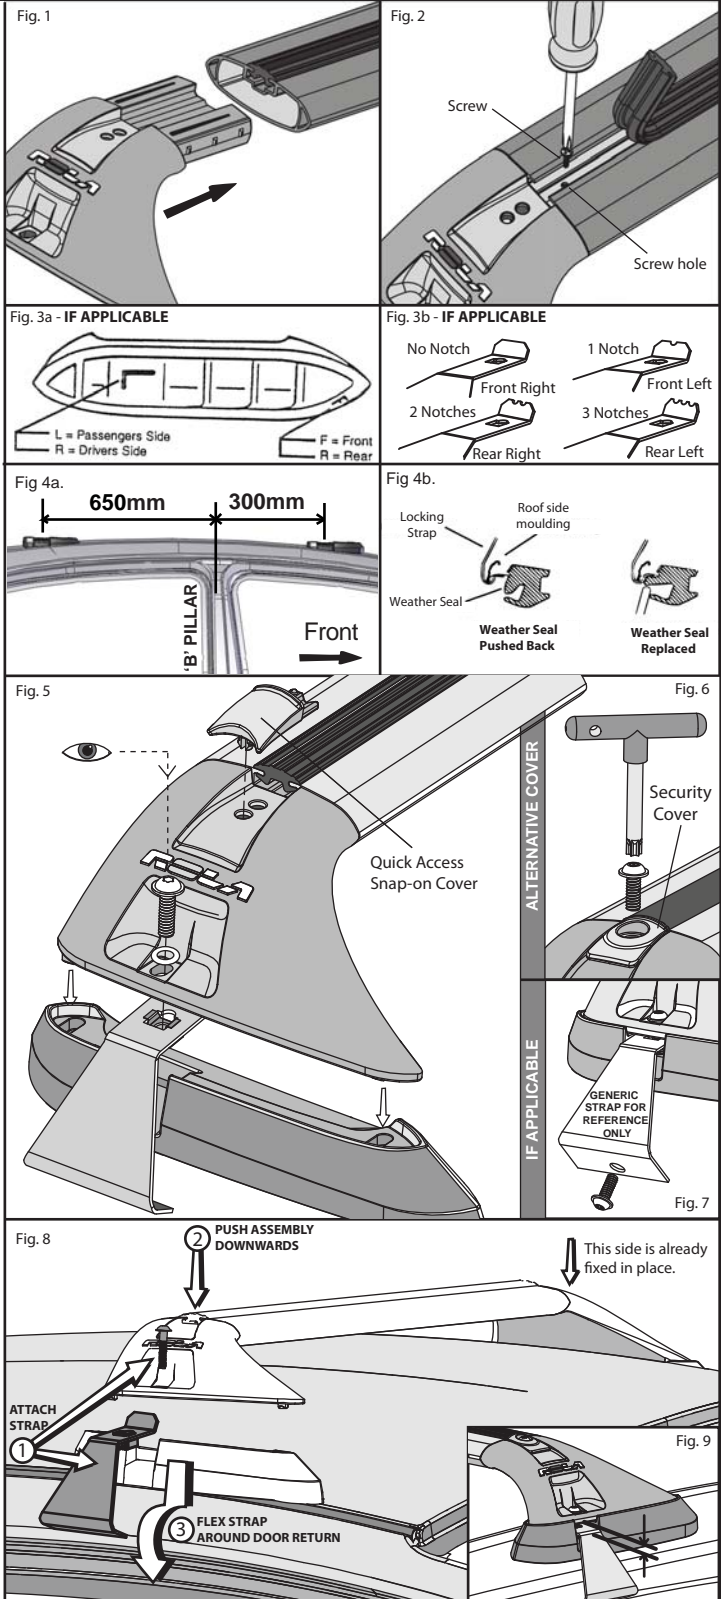

General Usage Information

It is essential for the proper assembly, operation and use of the Roof Rack that the instructions and safety precautions supplied are strictly observed. Read any fitting, care and usage instruction carefully.

The maximum permissible load for your Roof Bar is the lower of the maximum load capacity specified in your vehicle operation manual, or specified as applying to the Roof-Rack. Do not exceed the maximum specified load capacity.

Maximum permissible load = weight of the Roof Rack + weight of accessories + weight of load (cargo).

When fitting the Roof-Rack and transporting a load, ensure the vehicle's functions are not impaired (eg, sunroof, aerials, windscreen wipers, mirrors). Rear doors on Hatch- and Wagon-type vehicles should be inspected for adequate clearance for full opening operation of the boot/tailgate.

Stop and check all screw connections, bolts and retaining straps after a short distance of travel. Repeat these checks at regular intervals.

Warnings

Remember that the fitting of a Roof Rack and the transport of a load increases the overall height of the carrying vehicle.

Where the Roof-Rack is to be used in off-road conditions, a safety weight reduction of 1.5 should be observed from the total carrying capacity. (eg. 60kg becomes 40kg)

Cequent will not be liable to the purchaser or any other person for any consequential, incidental, direct or indirect loss, damage or costs incurred or suffered by the purchaser or any other person including but not limited to damage to persons or property, loss of turnover, loss of profits, loss of business or goodwill, arising from or in relation to the assembly and use of the Roof rack, or the non-observance of the fitting and care instructions.

APPENDICES & ADDITIONAL 'FITMENT SPECIFIC' FITTING STEPS - IF REQUIRED

This area has been intentionally left blank.