

Fitting Instructions #5417IS


Fiat Ducato 3rd Gen (2006-On)

Rear Leaf Spring Rear Eye Bush



Note: Polyurethane bushes must be fitted to both sides of the vehicle.

- Jack the vehicle up and support on jack stands/hoist;
- Using factory manual, remove the rear leaf springs;
- Remove original bushings from the housing with the use of a hydraulic press and suitable pressing tools;
- Grease up the body of the polyurethane bush and the inside of the housing, then, press the bushes into the housing;

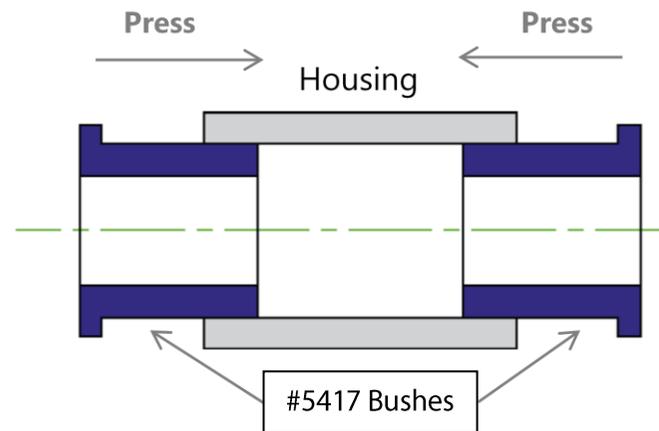

- Liberally apply the grease supplied to the polyurethane bore of the bush, the outside of the steel crush tubes. Then, press the steel crush tubes into the bushes. An arbour press will be required to insert the steel tube.
- Refit the rear leaf spring to the vehicle and tighten all bolts to manufacturer's torque settings.