

Fitting Instructions

Rear Differential Rear Bushing

Code: Z5258
Rev.A

Application:


FORD FALCON/TERRITORY:
BF FALCON / SY Territory

Always refer to current catalogue for complete application listing.

Kit Contents:

1 x Bushing with bonded tube.
1 x Grease.
1 x Washer

- Remove the rear seat base and disconnect the wheel speed sensors (Falcon only).
- Place vehicle on a hoist and safely raise.
- Remove the rear wheels and brake caliper bolts and secure calipers out of the way.
- Remove the exhaust hanger (located above tail-shaft).
- Before removing the tail shaft, mark its location along with any counter weights.
- Disconnect the hand brake cable.
- Support the lower controls and remove the lower shock mounts.
- Support the cradle with jack stands or a bench before unbolting cradle and control blade bolts.
- Be mindful of the control blade bushing as you lower the sub frame to prevent spring back.

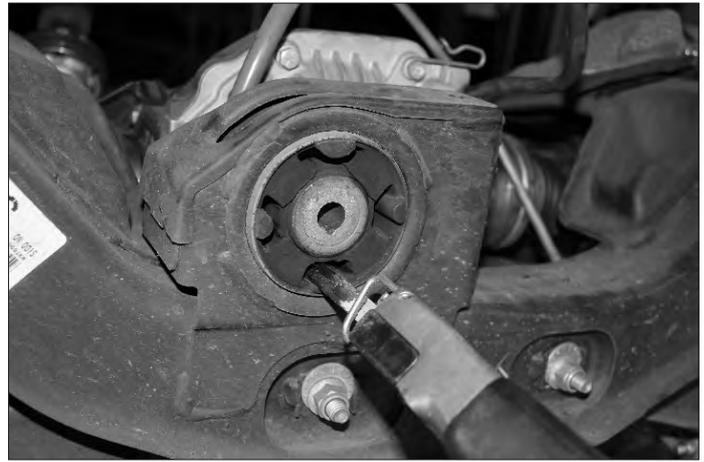

- Cut the outer shell with an Air Hacksaw.
- Once the bushing is removed be sure eyelet is clean of any dirt or sharp edges..
- For best performance, this spherical design requires a small amount of lubrication to the OD of the bushing.
- Place the new bushing in position - see below illustration, note voiding orientation.

NOTE: If the vehicle is fitted with a vibration Dampener at the rear of the bushing, we recommend re-fitting this.



Important: Tighten bolt to manufacturers specifications.

- Re fit OE bolt with supplied washer and proceed to tighten.
- Bushing will push into position. Tighten bolt to manufacturers specifications.

NOTE: When re installing cradle be sure cradle is pushed back away from the fuel tank before tightening bolts.

N.B: It is recommended that a licenced workshop or tradesperson carry out the above procedure and that workshop manual and relevant safety procedures are followed in addition to the above.